

ARM® CoreSight™ ETM-R5

Revision: r0p0

Technical Reference Manual



ARM CoreSight ETM-R5

Technical Reference Manual

Copyright © 2010, 2013 ARM. All rights reserved.

Release Information

The following changes have been made to this book.

Change history			
Date	Issue	Confidentiality	Change
03 August 2010	A	Confidential	First release for r0p0.
26 July 2013	B	Non-Confidential	Second release for r0p0.

Proprietary Notice

Words and logos marked with ® or ™ are registered trademarks or trademarks of ARM in the EU and other countries, except as otherwise stated below in this proprietary notice. Other brands and names mentioned herein may be the trademarks of their respective owners.

Neither the whole nor any part of the information contained in, or the product described in, this document may be adapted or reproduced in any material form except with the prior written permission of the copyright holder.

The product described in this document is subject to continuous developments and improvements. All particulars of the product and its use contained in this document are given by ARM in good faith. However, all warranties implied or expressed, including but not limited to implied warranties of merchantability, or fitness for purpose, are excluded.

This document is intended only to assist the reader in the use of the product. ARM shall not be liable for any loss or damage arising from the use of any information in this document, or any error or omission in such information, or any incorrect use of the product.

Where the term ARM is used it means “ARM or any of its subsidiaries as appropriate”.

Confidentiality Status

This document is Non-Confidential. The right to use, copy and disclose this document may be subject to license restrictions in accordance with the terms of the agreement entered into by ARM and the party that ARM delivered this document to.

Product Status

The information in this document is final, that is for a developed product.

Web Address

<http://www.arm.com>

Contents

ARM CoreSight ETM-R5 Technical Reference Manual

	Preface	
	About this book	vi
	Feedback	ix
Chapter 1	Introduction	
	1.1 About the product	1-2
	1.2 Compliance	1-4
	1.3 Features	1-5
	1.4 Interfaces	1-7
	1.5 Configurable options	1-8
	1.6 Test features	1-9
	1.7 Product documentation, design flow, and architecture	1-10
	1.8 Product revisions	1-12
Chapter 2	Functional Description	
	2.1 About the functions	2-2
	2.2 Interfaces	2-4
	2.3 Clocking and resets	2-6
	2.4 Operation	2-7
	2.5 Constraints and limitations of use	2-10
Chapter 3	Programmers Model	
	3.1 About the programmers model	3-2
	3.2 Modes of operation and execution	3-3
	3.3 Memory model	3-4
	3.4 Register summary	3-5

	3.5	Register descriptions	3-16
Appendix A		Signal Descriptions	
	A.1	Signal descriptions	A-2
	A.2	Clocks and resets	A-4
	A.3	Processor trace interface	A-5
	A.4	APB interface	A-6
	A.5	ATB interface	A-7
	A.6	ETM-R5 macrocell sharing signals	A-9
	A.7	Test interface	A-10
Appendix B		AC Characteristics	
	B.1	ETM-R5 macrocell input and output signal timing parameters	B-2
Appendix C		Revisions	

Preface

This preface introduces the *ARM® CoreSight® ETM-R5 Technical Reference Manual*. It contains the following sections:

- [About this book on page vi.](#)
- [Feedback on page ix.](#)

About this book

This book is for the CoreSight *Embedded Trace Macrocell* (ETM) for the Cortex®-R5 and Cortex-R5F processors, the CoreSight ETM-R5 macrocell.

You implement the ETM-R5 macrocell with the Cortex-R5 processor or the Cortex-R5F processor. In this manual, in general:

- Reference to the processor applies to the Cortex-R5 processor or the Cortex-R5F processor.
- Reference to the Cortex-R5 processor applies also to the Cortex-R5F processor.

The context makes it clear if information applies to only one of the processor options.

Product revision status

The *rn**pn* identifier indicates the revision status of the product described in this book, where:

- rn*** Identifies the major revision of the product.
- pn*** Identifies the minor revision or modification status of the product.

Intended audience

This book is written for:

- Designers of development tools providing support for ETM-R5 macrocell functionality. Implementation-specific behavior is described in this document. You can find complementary information in the *ARM® Embedded Trace Macrocell Architecture Specification*.
- Hardware and software engineers integrating the macrocell into an ASIC that includes a Cortex-R5 processor. You can find complementary information in the *ARM® CoreSight™ ETM-R5 Integration Manual*.

Using this book

This book is organized into the following chapters:

Chapter 1 *Introduction*

Read this for an introduction to the functionality of the macrocell.

Chapter 2 *Functional Description*

Read this for a description of the interfaces, operation, clocking and resets of the macrocell.

Chapter 3 *Programmers Model*

Read this for a description of the programmers model for the macrocell.

Appendix A *Signal Descriptions*

Read this for a description of the signals used in the macrocell.

Appendix B *AC Characteristics*

Read this for a description of the instruction cycle timing and instruction interlocks.

Appendix C Revisions

Read this for a description of the technical changes between released issues of this book.

Glossary

The *ARM Glossary* is a list of terms used in ARM documentation, together with definitions for those terms. The *ARM Glossary* does not contain terms that are industry standard unless the ARM meaning differs from the generally accepted meaning.

See *ARM Glossary*, <http://infocenter.arm.com/help/topic/com.arm.doc.aeg0014-/index.html>.

Conventions

This book uses the conventions that are described in:

- *Typographical conventions*.
- *Signals*.

Typographical conventions

The following table describes the typographical conventions:

Typographical conventions	
Style	Purpose
<i>italic</i>	Introduces special terminology, denotes cross-references, and citations.
bold	Highlights interface elements, such as menu names. Denotes signal names. Also used for terms in descriptive lists, where appropriate.
monospace	Denotes text that you can enter at the keyboard, such as commands, file and program names, and source code.
<u>monospace</u>	Denotes a permitted abbreviation for a command or option. You can enter the underlined text instead of the full command or option name.
monospace <i>italic</i>	Denotes arguments to monospace text where the argument is to be replaced by a specific value.
monospace bold	Denotes language keywords when used outside example code.
<and>	Encloses replaceable terms for assembler syntax where they appear in code or code fragments. For example: MRC p15, 0 <Rd>, <CRn>, <CRm>, <Opcode_2>
SMALL CAPITALS	Used in body text for a few terms that have specific technical meanings, that are defined in the <i>ARM glossary</i> . For example, IMPLEMENTATION DEFINED, IMPLEMENTATION SPECIFIC, UNKNOWN, and UNPREDICTABLE.

Signals

The signal conventions are:

Signal level	The level of an asserted signal depends on whether the signal is active-HIGH or active-LOW. Asserted means: <ul style="list-style-type: none"> • HIGH for active-HIGH signals. • LOW for active-LOW signals.
Lowercase n	At the start or end of a signal name denotes an active-LOW signal.

Additional reading

This section lists publications by ARM and by third parties.

See Infocenter, <http://infocenter.arm.com>, for access to ARM documentation.

ARM publications

This book contains information that is specific to this product. See the following documents for other relevant information:

- *ARM® Embedded Trace Macrocell Architecture Specification* (ARM IHI 0014).
- *ARM® CoreSight™ Components Technical Reference Manual* (ARM DDI 0314).
- *ARM® Cortex™-R5 Technical Reference Manual* (ARM DDI 0460).
- *ARM® CoreSight™ Technology System Design Guide* (ARM DGI 0012).
- *ARM® AMBA® APB Protocol Specification v2.0* (ARM IHI 0024).
- *ARM® AMBA® 4 ATB Protocol Specification ATBv1.0 and ATBv1.1* (ARM IHI 0032).

The following confidential books are only available to licensees:

- *ARM® CoreSight™ ETM-R5 Configuration and Sign-off Guide* (ARM DII 0262).
- *ARM® CoreSight™ ETM-R5 Integration Manual* (ARM DIT 0019).
- *ARM® CoreSight™ Design Kit for Cortex-R5™ and Cortex-R5F™ Integration Manual* (ARM DIT 0020).
- *ARM® CoreSight™ Architecture Specification v2.0* (ARM IHI 0029).

Feedback

ARM welcomes feedback on this product and its documentation.

Feedback on this product

If you have any comments or suggestions about this product, contact your supplier and give:

- The product name.
- The product revision or version.
- An explanation with as much information as you can provide. Include symptoms and diagnostic procedures if appropriate.

Feedback on content

If you have comments on content then send an e-mail to errata@arm.com. Give:

- The title.
- The number, DDI0469B.
- The page numbers to which your comments apply.
- A concise explanation of your comments.

ARM also welcomes general suggestions for additions and improvements.

———— **Note** —————

ARM tests the PDF only in Adobe Acrobat and Acrobat Reader, and cannot guarantee the quality of the represented document when used with any other PDF reader.

Chapter 1

Introduction

This chapter introduces the ETM-R5 macrocell. It contains the following sections:

- *About the product* on page 1-2.
- *Compliance* on page 1-4.
- *Features* on page 1-5.
- *Interfaces* on page 1-7.
- *Configurable options* on page 1-8.
- *Test features* on page 1-9.
- *Product documentation, design flow, and architecture* on page 1-10.
- *Product revisions* on page 1-12.

1.1 About the product

The ETM-R5 macrocell provides real-time instruction trace and data trace for the Cortex-R5 microprocessor. The ETM-R5 macrocell generates information that trace software tools use to reconstruct the execution of all or part of a program.

For full reconstruction of program execution, the ETM-R5 macrocell is able to trace:

- All instructions, including condition code pass/fail and dual issue information.
- Load/store address and data values.
- Data values used in coprocessor register transfers.
- Values of context-ID changes.
- Target addresses of taken direct and indirect branch operations.
- Exceptions.
- Changes in processor instruction set state.
- Entry to and return from Debug state when Halting Debug-mode is enabled.
- Cycle counts between executed instructions.

The ETM-R5 macrocell contains logic, known as resources, that enables you to control tracing by specifying the exact set of triggering and filtering conditions required for a particular application. Resources include address comparators and data value comparators, counters, and sequencers.

The ETM-R5 macrocell is a CoreSight component, and is an integral part of the ARM Real-time Debug solution, RealView®. See the *ARM® CoreSight™ Technology System Design Guide* for more information about CoreSight. See the *ARM® Embedded Trace Macrocell Architecture Specification* for more information about the ETM architecture.

1.1.1 The CoreSight debug environment

The ETM-R5 macrocell is designed for use with CoreSight, an extensible, system-wide debug and trace architecture from ARM.

A software debugger provides the user interface to the ETM-R5 macrocell. You can use this interface to:

- Configure ETM-R5 macrocell facilities such as filtering.
- Configure optional trace features such as cycle accurate tracing.
- Configure the other CoreSight components such as the Trace Port Interface Unit (TPIU).
- Access the processor debug and performance monitor units.

A CoreSight system can provide memory-mapped access from the processor to its own debug and trace components.

The ETM-R5 macrocell outputs its trace stream to the AMBA 3 *Advanced Trace Bus* (ATB) interface. The CoreSight infrastructure provides the following options:

- Export the trace information through a trace port. An external *Trace Port Analyzer* (TPA) captures the trace information as [Figure 1-1 on page 1-3](#) shows.
- Write the trace information directly to an on-chip *Embedded Trace Buffer* (ETB). You can read out the trace at low speed using a JTAG or Serial Wire interface when the trace capture is complete as [Figure 1-1 on page 1-3](#) shows.

The debugger extracts the captured trace information from the TPA or ETB and decompresses it to provide full disassembly, with symbols, of the code that was executed. The trace information generated by the ETM-R5 macrocell gives the debugger the capability to link this data back to the original high-level source code, to provide a visualization of how the code was executed on the Cortex-R5 processor.

Figure 1-1 shows how the ETM-R5 macrocell fits into a CoreSight debug environment to provide full trace capabilities in a single processor system. The external debug software configures the trace and debug components through the *Debug Access Port (DAP)*. The ROM table contains a unique identification code for the *System on Chip (SoC)* and the base addresses of the components connected to the debug APB. The trace stream from the ETM-R5 macrocell is replicated to provide on-chip storage using the CoreSight ETB or output off-chip using the TPIU. Cross-triggering operates through the *Cross-Trigger Interface (CTI)*s and the cross-trigger matrix.

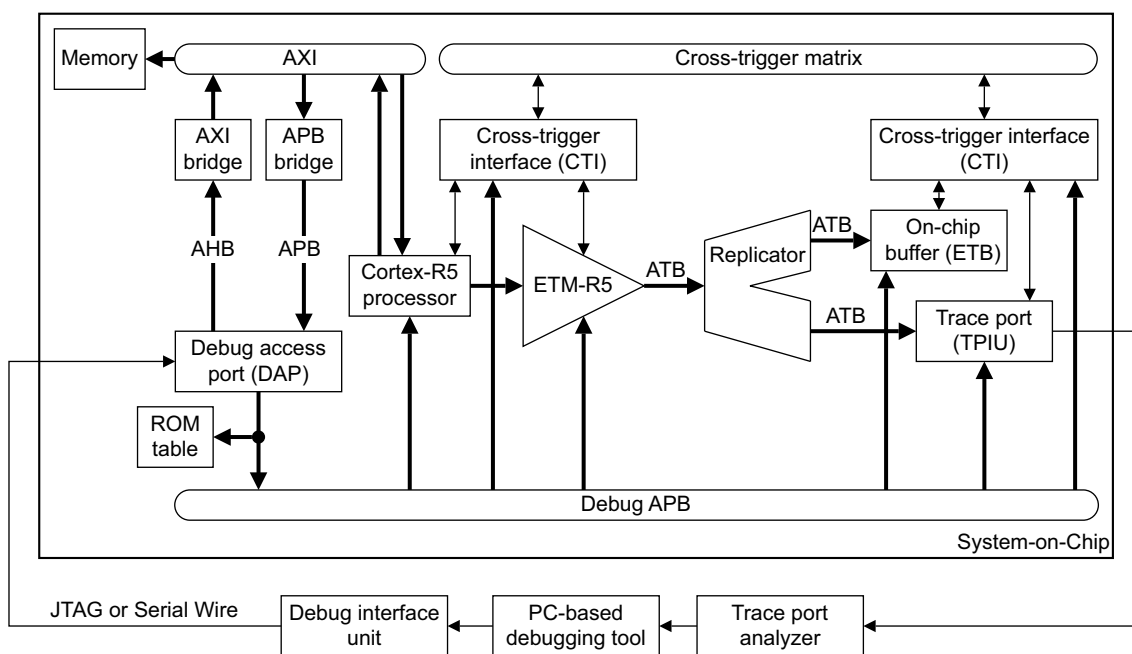


Figure 1-1 ETM-R5 macrocell system diagram

Note

In Figure 1-1, the arrows on the thick lines show the transaction direction on busses, from master to slave port. Each bus contains individual signals that go from master to slave and other signals that go from slave to master.

1.2 Compliance

ETM-R5 macrocell is compatible with the CoreSight architecture.

ETM-R5 macrocell implements version 3.3 of the ETM architecture, ETMv3.3. See the *ARM® Embedded Trace Macrocell Architecture Specification* for more information.

For more information about architectural compliance, see [Architecture and protocol information on page 1-11](#).

1.3 Features

The ETM-R5 macrocell supports tracing of 32-bit ARM instructions, and 16-bit and 32-bit Thumb instructions.

See the *ARM® Embedded Trace Macrocell Architecture Specification* for information about:

- The trace protocol.
- The features of ETMv3.3.
- Controlling tracing using triggering and filtering resources.
- ETM sharing.

[Table 1-1](#) lists the features of the ETM-R5 macrocell that are implementation-defined, in terms of either:

- The number of times the feature is implemented.
- The size of the feature.

Table 1-1 ETM-R5 macrocell features with implementation-defined number of instances or size

Feature	ETM-R5 macrocell value	Notes
Address comparators	4 pairs	See bits[3:0] of the ETMCCR ^a
Data value comparators	2	See bits[7:4] of the ETMCCR ^a
EmbeddedICE watchpoint comparators	Not implemented	Not supported in ETMv3.3
Context ID comparators	1	See bits[25:24] of the ETMCCR ^a
Counters	2	See bits[15:13] of the ETMCCR ^a
Sequencer	1	See bit[16] of the ETMCCR. ^a
Memory Map decoder inputs	Not implemented	See bits[12:8] of the ETMCCR ^a
External inputs	0-4	See bits[19:17] of the ETMCCR ^a
External outputs	0-2	See bits[22:20] of the ETMCCR ^a
Extended external input bus width	47	See bits[10:3] of the ETMCCER ^b
Extended external input selectors	2	See bits[2:0] of the ETMCCER ^b
Instrumentation resources	Not implemented	Not supported in ETMv3.3
Trace port size	32-bit	See bits[21,6:4] of the ETMCR ^c
FIFO size	144 bytes	-
ASICCTL general-purpose bus interface	8-bit	See ETMASICCR ^d

a. See [Configuration Code Register](#) on page 3-20.

b. See [Configuration Code Extension Register](#) on page 3-24.

c. See [Main Control Register](#) on page 3-16.

d. See [ASIC Control Register](#) on page 3-22

Table 1-2 lists which optional features of the ETM architecture the ETM-R5 macrocell implements.

Table 1-2 ETM-R5 macrocell implementation of optional features

Feature	Implemented?	Notes
FIFOFULL control	No	See bit[23] of the ETMCCR ^a
Trace Start/Stop block	Yes	See bit[26] of the ETMCCR ^a
Trace all branches	Yes	See bit[8] of the ETMCR ^b
Cycle-accurate trace	Yes	See bit[12] of the ETMCR ^b
Data trace options		
Data address tracing	Yes	See bits[3:2] of the ETMCR ^b
Data value tracing	Yes	See bits[3:2] of the ETMCR ^b
Data-only tracing	Yes	See bit[20] of the ETMCR ^b
CPRT tracing	Yes	See bits[19, 1] of the ETMCR ^b
Data address comparison	Yes	Bit[12] of the ETMCCER ^c reads-as-zero
EmbeddedICE behavior control	No	Not supported in ETMv3.3
EmbeddedICE inputs to Trace Start/Stop block	No	Not supported in ETMv3.3
Alternative address compression	No	Not supported in ETMv3.3
OS Lock mechanism	No	Not implemented
Secure non-invasive debug	No	Cortex-R5 does not implement the Security Extensions
Context ID tracing	Yes	See bits[15:14] of the ETMCR ^b
Trace output	Yes	ATB

a. See *Configuration Code Register* on page 3-20.

b. See *Main Control Register* on page 3-16.

c. See *Configuration Code Extension Register* on page 3-24.

See [Appendix A Signal Descriptions](#) for information about the macrocell signals.

1.4 Interfaces

The ETM-R5 macrocell has the following main interfaces:

- Processor trace.
- ATB.
- *Advanced Peripheral Bus* (APB) Debug.
- Test.

[Interfaces on page 2-4](#) describes the ETM-R5 macrocell interfaces in more detail.

1.5 Configurable options

The ETM-R5 macrocell includes the following configuration inputs:

- **MAXEXTOUT[1:0]** determines the maximum number of external outputs.
- **MAXEXTIN[2:0]** determines the maximum number of external inputs.
- **MAXCORES[2:0]** determines the number of processors that share the ETM.

You can read the MAXEXTOUT and MAXEXTIN values from bits[22:17] of the ETMCCR, see [Configuration Code Register on page 3-20](#). You can read the MAXCORES value from bits[14:12] of the ETMSCR. See *System Configuration Register* in the *ARM® Embedded Trace Macrocell Architecture Specification*.

1.6 Test features

The ETM-R5 macrocell provides the **SE** and **RSTBYPASS** inputs for testing the implemented device.

See also [Integration Test Registers on page 3-30](#) for information about the integration test registers, provided for testing the ETM-R5 macrocell implementation in an SoC.

1.7 Product documentation, design flow, and architecture

This section describes the CoreSight ETM-R5 macrocell books, how they relate to the design flow, and the relevant architectural standards and protocols.

See [Additional reading on page viii](#) for more information about the books described in this section.

1.7.1 Documentation

The CoreSight ETM-R5 macrocell documentation is as follows:

Technical Reference Manual

The *Technical Reference Manual* (TRM) describes the functionality and the effects of functional options on the behavior of the ETM-R5 macrocell. It is required at all stages of the design flow. Some behavior described in the TRM might not be relevant because of the way that the ETM-R5 macrocell is implemented and integrated.

Configuration and Sign-Off Guide

The *Configuration and Sign-Off Guide* (CSG) describes the processes to test and sign off the implemented design.

The ARM product deliverables include reference scripts and information about using them to implement your design. Reference methodology documentation from your *Electronic Design Automation* (EDA) tools vendor complements the CSG.

The CSG is a confidential book that is only available to licensees.

Integration Manual

The *Integration Manual* (IM) describes how to integrate the ETM-R5 macrocell into a SoC. It includes a description of the pins that the integrator must tie off, to configure the macrocell for the required integration.

The IM is a confidential book that is only available to licensees.

1.7.2 Design flow

The ETM-R5 macrocell is delivered as synthesizable *Register Transfer Level* (RTL) code. Before it can be used in a product, it must go through the following process:

1. Implementation. The implementer synthesizes the RTL, then places and routes the netlist to produce a hard macrocell.
2. Integration. The integrator instantiates the ETM into a SoC. This also tests its integration with the processor and the other SoC components that it is connected to.
3. Programming. The debug software developer programs the ETM and tests any trace software required for use with a SoC.

Each stage of the process:

- Can be performed by a different party.
- Can include options that affect the behavior and features at the next stage:

Build configuration

The ETM-R5 macrocell has no implementer defined options.

Configuration inputs

The integrator configures some features of the ETM-R5 macrocell by tying inputs to specific values. These configurations affect the start-up behavior before any software configuration is made. They can also limit the options available to the software.

Software configuration

The programmer configures the ETM-R5 macrocell by programming values into software-visible registers. This affects the behavior of the ETM.

See [Chapter 3 Programmers Model](#) for information on the ETM-R5 macrocell registers.

Note

References to a feature that is included mean that the appropriate configuration inputs have been selected, while references to an enabled feature mean one that has also been configured by software.

1.7.3 Architecture and protocol information

The ETM-R5 macrocell complies with, or implements, the specifications described in:

- [Trace macrocell](#).
- [Advanced Microcontroller Bus Architecture](#).

This TRM complements architecture reference manuals, architecture specifications, protocol specifications, and relevant external standards. It does not duplicate information from these sources.

Trace macrocell

The ETM-R5 macrocell implements the ETM architecture version 3.3. See *ARM® Embedded Trace Macrocell Architecture Specification*.

Advanced Microcontroller Bus Architecture

This ETM-R5 macrocell complies with the *Advanced Microcontroller Bus Architecture* (AMBA) *Advanced Peripheral Bus* (APB) and *Advanced Trace Bus* (ATB) protocols. See *ARM® AMBA® APB Protocol Specification v2.0* and *ARM® AMBA® 4 ATB Protocol Specification ATBv1.0 and ATBv1.1*.

1.8 Product revisions

This section describes the differences in functionality between product revisions:

r0p0 First release.

There are no technical changes since the first release.

Chapter 2

Functional Description

This chapter describes the interfaces, operation, clocking and resets of the ETM-R5 macrocell. It contains the following sections:

- *About the functions* on page 2-2.
- *Interfaces* on page 2-4.
- *Clocking and resets* on page 2-6.
- *Operation* on page 2-7.
- *Constraints and limitations of use* on page 2-10.

2.1 About the functions

Figure 2-1 shows the main functional blocks and clock domains of the macrocell.

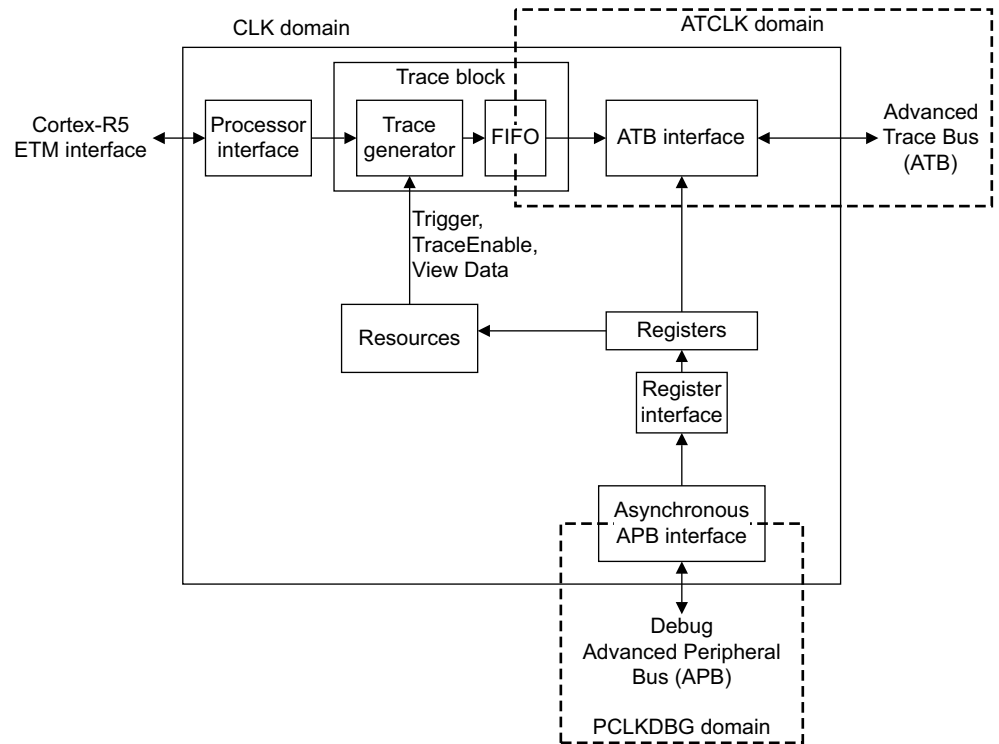


Figure 2-1 ETM-R5 macrocell block diagram

2.1.1 Processor interface

This block connects to the Cortex-R5 ETM interface. It pipelines the signals from the processor, decodes the control signals and passes on the information to the internal interfaces.

2.1.2 Trace generator

This block generates the trace packets that are a compressed form of the execution information provided by the Cortex-R5 processor trace generation. The trace packets are then passed to the FIFO.

2.1.3 FIFO

This block buffers bursts of trace packets and manages the transfer of them into the ATCLK domain. Up to 23 bytes of trace packet information can be written into the FIFO in one cycle and four bytes can be read out.

2.1.4 Resources

These blocks contain various comparators and state machines that are programmed by trace software to trigger and filter the trace information. They start and stop trace generation, depending on the conditions that have been set.

2.1.5 ATB Interface

This block reads up to four bytes of packet information from the FIFO and sends them over the ATB interface. It is also responsible for the insertion of flush, alignment synchronization and trigger information into the trace stream.

2.1.6 Asynchronous APB interface

This block implements the interface to the APB, that provides access to the programmable registers. It provides address decoding and pipelining of the address and data to and from the APB. The programmable registers reside in the CLK, ATCLK and PCLKDBG clock domains and so this block manages the synchronization of the access from the APB PCLKDBG clock domain to the other two clock domains.

2.2 Interfaces

The ETM-R5 macrocell has the following interfaces:

ATB A 32-bit wide ATB, used for trace output from the macrocell. Up to four bytes of trace packet information can be transferred over the bus in one clock cycle. This interface has hand shaking signals that indicate when trace data is valid and when the receiving component is ready to accept data. There are also signals to request and acknowledge a flush of the trace information and to indicate when a trigger condition has occurred.

See the *ARM® AMBA® 4 ATB Protocol Specification ATBv1.0 and ATBv1.1* for more information about this interface.

APB An APB that provides access to the programmable registers in the ETM-R5 macrocell and connects to the system Debug APB. This interface configures the ETM-R5 macrocell for a trace session.

See the *ARM® AMBA® APB Protocol Specification v2.0* for more information about this interface.

Processor trace

The Cortex-R5 passes its execution information to ETM-R5 macrocell over this interface. This interface is divided into two main sections for instruction and data execution information.

The instruction section contains instruction address and control information. The information carried on the control bus includes:

- The number of instructions executed in the same cycle.
- Changes in program flow.
- The current processor instruction state.
- Condition code evaluation.
- Exception information.

The data section contains address, data and control information. The address bus carries the addresses of memory locations accessed by load and store instructions. The data bus is 64-bits wide and carries the data values transferred by load, store and coprocessor register transfer instructions. The information carried by the control bus includes the type, direction and size of a data transfer. There is also a context ID bus that indicates the current context ID value of the processor.

This interface also includes:

- The 55-bit wide Event Bus, **EVNTBUS[54:0]**. See [Interaction with the Performance Monitoring Unit \(PMU\) on page 2-9](#).
- Debug state request/acknowledge signals.
- Wait for interrupt handshaking signals.
- A signal from the ETM to power up the interface.

Miscellaneous

The ETM-R5 macrocell has other interface signals that:

- Configure the ETM. See [Configurable options on page 1-8](#).
- Input and output external resource information that controls triggering and filtering of the trace stream.
- Control which processor is enabled, as the trace source, on the processor trace interface of the ETM.
- Enable invasive and non-invasive debug.

Test This interface contains the scan enable and reset bypass signals used in production testing of the ETM-R5 macrocell.

2.3 Clocking and resets

The following sections describe the ETM-R5 macrocell clocks, clock enables and clock resets:

- [ETM-R5 macrocell clock signals.](#)
- [ETM-R5 macrocell clock enable signals.](#)
- [ETM-R5 macrocell resets.](#)

2.3.1 ETM-R5 macrocell clock signals

The ETM-R5 macrocell has the following clocks:

CLK	This is the main clock for the ETM-R5 macrocell and must be the same clock as that wired to the CLKIN input of the Cortex-R5 processor. It can be asynchronous to PCLKDBG and ATCLK .
PCLKDBG	This is the Debug APB interface clock for the ETM-R5 macrocell. It can be asynchronous to CLK . The <i>ARM® CoreSight™ Technology System Design Guide</i> requires PCLKDBG and ATCLK to be synchronous.
ATCLK	This is the ATB interface clock. It can be asynchronous to CLK . The <i>ARM® CoreSight™ Technology System Design Guide</i> requires PCLKDBG and ATCLK to be synchronous.

[Figure 2-1 on page 2-2](#) shows these clock domains.

———— Note ————

Typically, in a SoC, you drive **PCLKDBG** at half the frequency of **ATCLK**.

2.3.2 ETM-R5 macrocell clock enable signals

The ETM-R5 macrocell has the following clock enable signals:

ATCLKEN	This is the ATB clock enable. It can slow down ATCLK .
PCLKENDBG	This is the Debug APB interface clock enable. It can slow down PCLKDBG .

2.3.3 ETM-R5 macrocell resets

The ETM-R5 macrocell has the following resets:

nSYSPORESET	This signal is the main powerup reset. It resets all the registers in the ETM-R5 macrocell. It is active-LOW.
PRESETDBGn	This signal is the Debug APB interface reset. It resets all the registers in the ETM-R5 macrocell. It is active-LOW.

2.4 Operation

This section describes the implementation-defined features of the operation of the ETM-R5 macrocell. It contains the following sections:

- [Implementation-defined registers.](#)
- [Precise TraceEnable events on page 2-8.](#)
- [Parallel instruction execution on page 2-8.](#)
- [Context ID tracing on page 2-8.](#)
- [Trace and Comparator features on page 2-8.](#)
- [Interaction with the Performance Monitoring Unit \(PMU\) on page 2-9.](#)
- [Other implementation-defined features of the macrocell on page 2-9.](#)

See the *ARM® Embedded Trace Macrocell Architecture Specification* for more information about the operation of the ETM-R5 macrocell.

2.4.1 Implementation-defined registers

There are two groups of ETM registers:

- Registers that are completely defined by the *ARM® Embedded Trace Macrocell Architecture Specification*.
- Registers that are at least partly implementation-defined.

[Chapter 3 Programmers Model](#) gives more information about the ETM registers, in the sections:

- [Register summary on page 3-5.](#)
- [Register descriptions on page 3-16.](#)

In [Chapter 3 Programmers Model](#), the following sections describe each of the implementation-defined registers:

- [Main Control Register on page 3-16.](#)
- [Configuration Code Register on page 3-20.](#)
- [ASIC Control Register on page 3-22.](#)
- [ID Register on page 3-23.](#)
- [Configuration Code Register on page 3-20.](#)
- [Extended External Input Selection Register on page 3-25.](#)
- [Power-Down Status Register on page 3-26.](#)
- The Integration test registers:
 - [Processor-ETM Interface Register on page 3-32.](#)
 - [Miscellaneous Outputs Register on page 3-34.](#)
 - [Miscellaneous Inputs Register on page 3-35.](#)
 - [Trigger Acknowledge Register on page 3-36.](#)
 - [Trigger Request Register on page 3-37.](#)
 - [ATB Data Register 0 on page 3-38.](#)
 - [ATB Control Register 0 on page 3-41.](#)
 - [ATB Control Register 1 on page 3-40.](#)
 - [ATB Control Register 2 on page 3-39.](#)
- [Peripheral Identification Registers on page 3-26.](#)

- [ETM Component Identification Registers on page 3-29](#).

2.4.2 Precise TraceEnable events

The *ARM® Embedded Trace Macrocell Architecture Specification* states that **TraceEnable** is imprecise under certain conditions, with some implementation-defined exceptions. When the enabling event selects the following resources, it does not cause **TraceEnable** to be imprecise, provided that the resources are themselves precise:

- Single address comparators.
- Address range comparators.

2.4.3 Parallel instruction execution

The Cortex-R5 processor supports parallel instruction execution. This means the macrocell is capable of tracing two instructions per cycle.

Although the trace start/stop block is evaluated for each instruction as required, the macrocell cannot trace one instruction without the other. This means if one instruction is traced, the instruction it is paired with is always traced as well. If **ViewData** is active, any data associated with the paired instruction is also traced.

2.4.4 Context ID tracing

The macrocell detects the MCR instruction that changes the context ID, and traces the appropriate number of bytes as a context ID packet instead of a normal data packet. This means that if context ID tracing is enabled, an MCR instruction that changes the context ID does not have its data traced separately.

2.4.5 Trace and Comparator features

In ETM Architecture v3.3, it is implementation-defined whether an ETM supports a number of Trace and Comparator features. This section specifies the implementation of these features on the CoreSight ETM-R5 macrocell:

- [Trace features](#).
- [Comparator features](#).

Trace features

The ETM-R5 macrocell implements all of the ETMv3.3 trace features. This means it supports:

- Data value and data address tracing.
- Data suppression.
- Cycle-accurate tracing.

For descriptions of these features see the *ARM® Embedded Trace Macrocell Architecture Specification*.

Comparator features

The CoreSight ETM-R5 macrocell implements data address comparison. For a description of data address comparison see the *ARM® Embedded Trace Macrocell Architecture Specification*.

2.4.6 Interaction with the Performance Monitoring Unit (PMU)

The Cortex-R5 processor includes a PMU that enables events, such as cache misses and instructions executed, to be counted over a period of time. The macrocell can still use these events by means of the extended external input facility. Each bit in the **EVENTBUS[54:0]** input is mapped to the corresponding extended external input. See the *ARM® Cortex™-R5 Technical Reference Manual* for details of the mapping of events to bits within this bus.

Some events use two bits. Two of these events can occur in a cycle. They must be dealt with separately if they are to be properly counted.

The Cortex-R5 PMU can count the two external outputs as additional events. These events are not provided back to the macrocell as extended external inputs.

These facilities enable additional filtering of the system events using ETM resources, such as instruction address ranges or the start/stop resource, before they are passed back to the PMU for counting. To do this:

- Configure the ETM extended external input selectors to the system events you want to count.
- Configure the required ETM filtering resource as appropriate.
- Configure the ETM external outputs to extended external input selector and the required ETM filtering resource.
- Select the ETM external outputs as the events to be counted in the Cortex-R5 PMU.

2.4.7 Other implementation-defined features of the macrocell

The following implementation-defined features of the macrocell do not affect the descriptions of the features given in the *ARM® Embedded Trace Macrocell Architecture Specification*:

- Bits[1:0] of the Synchronization Frequency Register are reserved, RAZ, WI.
- Value Not Traced packets are not output in data-only mode. When data address tracing is enabled in the data-only mode, the data transfer trace output can include an address packet. This occurs when the traced data transfer addresses are non-sequential between successive transfers.

2.5 Constraints and limitations of use

This section describes the constraints and limitations of use that apply to the ETM-R5 macrocell. It contains the following sections:

- [Trace limitations](#).
- [PortMode and PortSize](#).

2.5.1 Trace limitations

There are no trace limitations.

2.5.2 PortMode and PortSize

The macrocell only supports a 32-bit port size, and only supports the dynamic port mode.

In the ETMCR, at offset 0x0, from reset:

- The PortSize bits, bits[21, 6:4], take the value b0100, indicating a 32-bit port.
- The PortMode bits, bits[13, 17:16], take the value b000, indicating dynamic port mode.

For more information see [Main Control Register on page 3-16](#).

Chapter 3

Programmers Model

This chapter describes the programmers model. It contains the following sections:

- *About the programmers model on page 3-2.*
- *Modes of operation and execution on page 3-3.*
- *Memory model on page 3-4.*
- *Register summary on page 3-5.*
- *Register descriptions on page 3-16.*

3.1 About the programmers model

This chapter describes the mechanisms for programming the registers that set up the trace and triggering facilities of the macrocell. The programmers model enables you to use the ETM registers to control the macrocell.

The following sections describe the programmers model:

- [Controlling ETM programming on page 3-3.](#)
- [Programming and reading ETM registers on page 3-3.](#)
- [Register summary on page 3-5.](#)
- [Register descriptions on page 3-16.](#)

3.2 Modes of operation and execution

The following sections describes how you control ETM programming.

3.2.1 Controlling ETM programming

When programming the ETM registers you must enable all the changes at the same time. For example, if the counter is reprogrammed, it might start to count based on incorrect events, before the trigger condition has been correctly set up.

You can use the ETM programming bit in the ETMCR to disable all trace operations during programming. See [Main Control Register on page 3-16](#). To do this follow the procedure shown in [Figure 3-1](#).

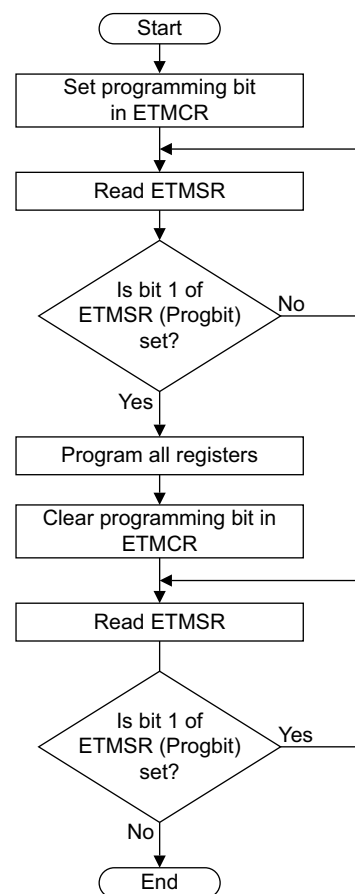


Figure 3-1 Programming ETM registers

The processor does not have to be in the debug state while you program the ETM registers.

3.2.2 Programming and reading ETM registers

You program and read the ETM registers using the Debug APB interface. This provides a direct method of programming:

- A stand-alone macrocell.
- A macrocell in a CoreSight system.

3.3 Memory model

See the *ARM® Embedded Trace Macrocell Architecture Specification* for descriptions of the trace packet formats generated by the ETM-R5 macrocell.

3.4 Register summary

This section summarizes the ETM registers. For full descriptions of the ETM registers, see:

- [Register descriptions on page 3-16](#), for the implementation-defined registers.
- The *ARM® Embedded Trace Macrocell Architecture Specification*, for the other registers.

[Table 3-1](#) lists all of the registers, and tells you where each register is described in detail. The registers are listed in register number order.

The macrocell registers are listed by functional group in the section [Functional grouping of registers on page 3-10](#). The functional group register tables include additional information about each register:

- The register access type. This is read-only, write-only or read/write.
- The clock domain of the register.
- The base offset address of the register. The base address of a register is always four times its register number.
- Additional information about the implementation of the register, where appropriate.

———— Note ————

- Registers not listed here are not implemented. Reading a non-implemented register address returns 0. Writing to a non-implemented register address has no effect.
- In [Table 3-1](#):
 - The Reset column shows the value of the register immediately after an ETM reset. For read-only registers, every read of the register returns this value.
 - The listed Functional group table gives more information about the register, including its clock domain.
 - Access type is described as follows:

RW	Read and write.
RO	Read only.
WO	Write only.

All ETM registers are 32-bits wide.

Table 3-1 ETM-R5 macrocell register summary

Register number	Name	Type	Reset	Group ^a	Description
0x000	ETMCR	RW	0x00000441	1	Main Control Register on page 3-16
0x001	ETMCCR	RO	0x8D014024 ^b	1	Configuration Code Register on page 3-20
0x002	ETMTRIGGER	RW	— ^c	4	Trigger Event Register in the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>
0x003	ETMASICCTLR	RW	0x00000000	1	ASIC Control Register on page 3-22
0x004	ETMSR	RW	— ^c	1	ETM Status Register in the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>

Table 3-1 ETM-R5 macrocell register summary (continued)

Register number	Name	Type	Reset	Group ^a	Description
0x005	ETMSCR	RO	0x00020C0C ^d	1	<i>System Configuration Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x006	ETMTSSCR	RW	– ^c	2	<i>TraceEnable Start/Stop Control Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x007	ETMTECR2	RW	– ^c	2	<i>TraceEnable Control 2 Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x008	ETMTTEVR	RW	– ^c	2	<i>TraceEnable Event Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x009	ETMTECR1	RW	– ^c	2	<i>TraceEnable Control 1 Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x00B	ETMFFLR ^e	RW	– ^c	1	<i>FIFOFULL Level Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x00C	ETMVDEVR	RW	– ^c	2	<i>ViewData Event Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x00D	ETMVDCR1	RW	– ^c	2	<i>ViewData Control 1 Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x00F	ETMVDCR3	RW	– ^c	2	<i>ViewData Control 3 Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x010 to 0x017	ETMACVR1-8	RW	– ^c	3	<i>Address Comparator Value Registers in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x020 to 0x027	ETMACTR1-8	RW	– ^c	3	<i>Address Comparator Access Type Registers in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x030 ^f	ETMDCVR1 ^f	RW	– ^c	3	<i>Data Comparator Value Registers in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x032 ^f	ETMDCVR3 ^f	RW	– ^c	3	<i>Data Comparator Value Registers in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x040 ^f	ETMDCMR1 ^f	RW	– ^c	3	<i>Data Comparator Mask Registers in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x042 ^f	ETMDCMR3 ^f	RW	– ^c	3	<i>Data Comparator Mask Registers in the ARM® Embedded Trace Macrocell Architecture Specification</i>

Table 3-1 ETM-R5 macrocell register summary (continued)

Register number	Name	Type	Reset	Group ^a	Description
0x050, 0x051	ETMCNTRLDVR1-2	RW	–c	4	Counter Reload Value Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x054, 0x055	ETMCNTENR1-2	RW	–c	4	Counter Enable Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x058, 0x059	ETMCNTRLDEV1-2	RW	–c	4	Counter Reload Event Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x05C, 0x05D	ETMCNTVR1-2	RW	–c	4	Counter Value Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x060 to 0x065	ETMSQEV1-6	RW	–c	4	Sequencer State Transition Event Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x067	ETMSQR	RW	–c	4	Current Sequencer State Register in the ARM® Embedded Trace Macrocell Architecture Specification
0x068, 0x069	ETMEXTOUTEV1-2	RW	–c	4	External Output Event Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x06C	ETMCIDCVR	RW	–c	3	Context ID Comparator Value Registers in the ARM® Embedded Trace Macrocell Architecture Specification
0x06F	ETMCIDCMR	RW	–c	3	Context ID Comparator Mask Register in the ARM® Embedded Trace Macrocell Architecture Specification
0x078	ETMSYNCFR	RW	0x00000400	1	Synchronization Frequency Register in the ARM® Embedded Trace Macrocell Architecture Specification
0x079	ETMIDR	RO	0x4104F23x ^g	1	ID Register on page 3-23
0x07A	ETMCCER	RO	0x000009BA	1	Configuration Code Extension Register on page 3-24
0x07B	ETMEXTINSEL1-4	RW	–c	4	Extended External Input Selection Register on page 3-25
0x080	ETMTRACEIDR	RW	0x00000000	1	CoreSight Trace ID Register in the ARM® Embedded Trace Macrocell Architecture Specification
0x0C5	ETMPDSR	RO	–c	1	Power-Down Status Register on page 3-26
0x3B6	ITETMIF	RO ^h	–i	6	Processor-ETM Interface Register on page 3-32
0x3B7	ITMISCOUT	WO	n/a ^j	6	Miscellaneous Outputs Register on page 3-34
0x3B8	ITMISCIN	RO ^h	–i	6	Miscellaneous Inputs Register on page 3-35
0x3B9	ITTRIGGERACK	RO ^h	–i	6	Trigger Acknowledge Register on page 3-36
0x3BA	ITTRIGGERREQ	WO	n/a ^j	6	Trigger Request Register on page 3-37

Table 3-1 ETM-R5 macrocell register summary (continued)

Register number	Name	Type	Reset	Group ^a	Description
0x3BB	ITATBDATA0	WO	n/a ^j	6	ATB Data Register 0 on page 3-38
0x3BC	ITATBCTR2	RO ^h	..i	6	ATB Control Register 2 on page 3-39
0x3BD	ITATBCTR1	WO	n/a ^j	6	ATB Control Register 1 on page 3-40
0x3BE	ITATBCTR0	WO	n/a ^j	6	ATB Control Register 0 on page 3-41
0x3C0	ETMITCTRL	RW	0x00000000	5	<i>Integration Mode Control Register in the Embedded Trace Macrocell Architecture Specification</i>
0x3E8	ETMCLAIMSET	RW	0x000000FF	5	<i>Claim Tag Set Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3E9	ETMCLAIMCLR	RW	0x00000000	5	<i>Claim Tag Clear Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3EC	ETMLAR	WO	n/a ^{jk}	5	<i>Lock Access Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3ED	ETMLSR	RO	0x00000003 ^{kl}	5	<i>Lock Status Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3EE	ETMAUTHSTATUS	RO	..i	5	<i>Authentication Status Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3F2	ETMDEVID	RO	0x00000000	5	<i>CoreSight Device Configuration Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3F3	ETMDEVTYPE	RO	0x00000013	5	<i>CoreSight Device Type Register in the ARM® Embedded Trace Macrocell Architecture Specification</i>
0x3F4 to 0x3F7	ETMPIDR5-7	RO	..i	5	Peripheral Identification Registers on page 3-26
0x3F8 to 0x3FB	EETMPIDR0-3	RO	..i	-	-
0x3FC to 0x3FF	ETMCIDR0-3	RO	..i	5	ETM Component Identification Registers on page 3-29

a. Functional group. For more information, see:

For Group 1, [General control and ID registers on page 3-10](#), Table 3-2 on page 3-10.

For Group 2, [TraceEnable and ViewData registers on page 3-11](#), Table 3-3 on page 3-11.

For Group 3, [Comparator registers on page 3-12](#), Table 3-4 on page 3-12.

For Group 4, [Counter, Sequencer and other resource registers on page 3-13](#), Table 3-5 on page 3-13.

For Group 5, [CoreSight Management registers on page 3-14](#), Table 3-6 on page 3-14.

For Group 6, [Integration Test registers on page 3-15](#), Table 3-7 on page 3-15.

b. Default value when **MAXEXTOUT[1:0]** and **MAXEXTIN[2:0]** are all tied LOW (0), see the register description for more information.

c. The register is not reset by a reset of the macrocell. Therefore, it does not have a specific default value, and its reset value is Unknown.

d. Bits[14:12] of the System Configuration Register are tied to the **MAXCORES[2:0]** signals. If a **MAXCORES** bit is High then the corresponding bit in the System Configuration Register is set to 1, for example if **MAXCORES[0]** is tied HIGH then bit[12] is set to 1. The default value given is for all **MAXCORES** signals tied LOW, bits[14:12] = b000.

For more information about the **MAXCORES[2:0]** signals, see [Appendix A Signal Descriptions](#).

- e. Although the macrocell does not include **FIFOFULL** logic, the FIFOFULL Level Register controls the FIFO level that data suppression occurs. For more information see the *ARM® Embedded Trace Macrocell Architecture Specification*.
- f. In the Data Comparator register area, even number registers are reserved. For the CoreSight ETM-R5, reserved areas are:
 - Register 0x031, Data Comparator Value 1, at offset 0x0C4.
 - Register 0x033, Data Comparator Value 3, at offset 0x0CC.
 - Register 0x041, Data Comparator Mask 1, at offset 0x104.
 - Register 0x043, Data Comparator Mask 3, at offset 0x10C.

You must not write to these reserved register addresses. Reads from these addresses are Unpredictable.
- g. The value of bits[3:0] of the ETMIDR depend on the macrocell revision, see [ID Register on page 3-23](#) for more information.
- h. The values of the read-only Integration Test registers are valid only when the macrocell is in Integration Test mode. If you read one of these registers when the macrocell is in normal operating mode the result returned is Unknown.
- i. See the register description for details.
- j. Not applicable. These are write-only registers.
- k. This register is only present and visible when the **PADDRDBG31** input signal is at logic LOW. This occurs when the ETM-R5 macrocell is accessed by software, see [APB interface on page A-6](#).
- l. When **PADDRDBG31** input signal is at logic HIGH, that is when the ETM-R5 macrocell is accessed by a debugger, the register reads as 0x00000000.

3.4.1 Functional grouping of registers

This section lists the macrocell registers by functional group, as follows:

- [General control and ID registers.](#)
- [TraceEnable and ViewData registers.](#)
- [Comparator registers on page 3-12.](#)
- [Counter, Sequencer and other resource registers on page 3-13.](#)
- [CoreSight Management registers on page 3-14.](#)
- [Integration Test registers on page 3-15.](#)

These functional groups include all of the registers.

General control and ID registers

[Table 3-2](#) lists the general control and ID registers in register number order.

Table 3-2 General control and ID registers

Register number	Name	Base offset	Clock domain	Description
0x000	ETM Control	0x000	CLK	Main Control Register on page 3-16
0x001	Configuration Code	0x004	CLK	Configuration Code Register on page 3-20
0x003	ASIC Control	0x00C	CLK	ASIC Control Register on page 3-22
0x004	ETM Status	0x010	CLK	<i>ARM® Embedded Trace Macrocell Architecture Specification</i>
0x005	System Configuration	0x014	CLK	<i>ARM® Embedded Trace Macrocell Architecture Specification</i>
0x00B	FIFOFULL Level ^a	0x02C	CLK	<i>ARM® Embedded Trace Macrocell Architecture Specification</i>
0x078	Synchronization Frequency	0x1E0	CLK	<i>ARM® Embedded Trace Macrocell Architecture Specification^b</i>
0x079	ETM ID	0x1E4	CLK	ID Register on page 3-23
0x07A	Configuration Code Extension	0x1E8	CLK	Configuration Code Extension Register on page 3-24
0x080	CoreSight Trace ID	0x200	ATCLK	<i>ARM® Embedded Trace Macrocell Architecture Specification</i>
0x0C5	Power-Down Status	0x314	CLK	Power-Down Status Register on page 3-26

a. Although the macrocell does not include **FIFOFULL** logic, the FIFOFULL Level Register controls the FIFO level that data suppression occurs. For more information see the *ARM® Embedded Trace Macrocell Architecture Specification*.

b. Only bits[11:2] of the Synchronization Frequency Register are implemented. Bits[1:0] Read-As-Zero.

TraceEnable and ViewData registers

[Table 3-3 on page 3-11](#) lists the TraceEnable and ViewData registers in register number order.

Table 3-3 TraceEnable and ViewData registers

Register number	Name	Base offset	Clock domain	Description
0x006	TraceEnable Start/Stop Resource control	0x018	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x007	TraceEnable Control 2	0x01C	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x008	TraceEnable Event	0x020	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x009	TraceEnable Control 1	0x024	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x00C	ViewData Event	0x030	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x00D	ViewData Control 1	0x034	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x00F	ViewData Control 3	0x03C	CLK	ARM® Embedded Trace Macrocell Architecture Specification

Comparator registers

Table 3-4 lists the Comparator registers in register number order. These control the Address, Data and Context ID comparators.

Table 3-4 Comparator registers

Register number	Name	Base offset	Clock domain	Description
0x010 to 0x017	Address Comparator Value 1-8	0x040 to 0x05F	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x020 to 0x027	Address Comparator Access Type 1-8	0x080 to 0x09F	CLK	ARM® Embedded Trace Macrocell Architecture Specification ^a
0x030 ^b	Data Comparator Value 1 ^b	0x0C0 ^b	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x032 ^b	Data Comparator Value 3 ^b	0x0C8 ^b	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x040 ^b	Data Comparator Mask 1 ^b	0x100 ^b	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x042 ^b	Data Comparator Mask 3 ^b	0x108 ^b	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x06C	Context ID Comparator Value	0x1B0	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x06F	Context ID Comparator Mask	0x1BC	CLK	ARM® Embedded Trace Macrocell Architecture Specification

- a. Because the Cortex-R5 processor does not implement the Security Extensions, only bits[9:0] of the Address Comparator Access Type Registers are implemented.
- b. In the Data Comparator register area, even number registers are reserved. For the CoreSight ETM-R5, reserved areas are:
 Register 0x031, Data Comparator Value 1, at offset 0x0C4 Register 0x033, Data Comparator Value 3, at offset 0x0CC.
 Register 0x041, Data Comparator Mask 1, at offset 0x104 Register 0x043, Data Comparator Mask 3, at offset 0x10C.
 You must not write to these reserved register addresses. The value of a reads from these addresses is Unknown.

Counter, Sequencer and other resource registers

Table 3-5 lists the Counter, Sequencer and other resource registers in register number order. These control:

- The two Counters, and associated events.
- The Sequencer, and associated state change events.
- Trigger events.
- EXTOUT (External Output) events.
- Extended External Input selection.

Table 3-5 Counter, Sequencer and other resource registers

Register number	Name	Base offset	Clock domain	Description
0x002	Trigger Event	0x008	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x050, 0x051	Counter Reload Value 1-2	0x140, 0x144	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x054, 0x055	Counter Enable Event 1-2	0x150, 0x154	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x058, 0x059	Counter Reload Event 1-2	0x160, 0x164	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x05C, 0x05D	Counter Value 1-2	0x170, 0x174	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x060 to 0x065	Sequencer State Transition Events	0x180 to 0x194	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x067	Current Sequencer State	0x19C	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x068, 0x069	External Output Event 1-2	0x1A0, 0x1A4	CLK	ARM® Embedded Trace Macrocell Architecture Specification
0x07B	Extended External Input Selector	0x1EC	CLK	Extended External Input Selection Register on page 3-25

CoreSight Management registers

Table 3-6 lists the CoreSight Management registers in register number order.

Table 3-6 CoreSight Management registers

Register number	Name	Base offset	Clock domain	Description
0x3C0	Integration Mode Control	0xF00	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3E8	Claim Tag Set	0xFA0	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3E9	Claim Tag Clear	0xFA4	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3EC	Lock Access	0xFB0	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3ED	Lock Status	0xFB4	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3EE	Authentication Status	0xFB8	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3F2	Device Configuration	0xFC8	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3F3	Device Type	0xFCC	PCLKDBG	ARM® Embedded Trace Macrocell Architecture Specification
0x3F4 to 0x3F7	Peripheral ID4 to 7	0xFD0 to 0xFDC	PCLKDBG	Peripheral Identification Registers on page 3-26
0x3F8 to 0x3FB	Peripheral ID0 to 3	0xFE0 to 0xFEC	PCLKDBG	
0x3FC to 0x3FF	Component ID0 to 3	0xFF0 to 0xFFC	PCLKDBG	ETM Component Identification Registers on page 3-29

Integration Test registers

Table 3-7 lists the Integration Test registers in register number order.

Table 3-7 Integration Test registers

Register number	Name	Base offset	Clock domain	Description
0x3B6	ITETMIF	0xED8	CLK	<i>Processor-ETM Interface Register on page 3-32</i>
0x3B7	ITMISCOUT	0xEDC	CLK	<i>Miscellaneous Outputs Register on page 3-34</i>
0x3B8	ITMISCIN	0xEE0	CLK	<i>Miscellaneous Inputs Register on page 3-35</i>
0x3B9	ITTRIGGERACK	0xEE4	ATCLK	<i>Trigger Acknowledge Register on page 3-36</i>
0x3BA	ITTRIGGERREQ	0xEE8	ATCLK	<i>Trigger Request Register on page 3-37</i>
0x3BB	ITATBDATA0	0xEEC	ATCLK	<i>ATB Data Register 0 on page 3-38</i>
0x3BC	ITATBCTR2	0xEF0	ATCLK	<i>ATB Control Register 2 on page 3-39</i>
0x3BD	ITATBCTR1	0xEF4	ATCLK	<i>ATB Control Register 1 on page 3-40</i>
0x3BE	ITATBCTR0	0xEF8	ATCLK	<i>ATB Control Register 0 on page 3-41</i>

3.5 Register descriptions

The following sections describe the implementation-defined CoreSight ETM-R5 macrocell registers:

- [Main Control Register](#).
- [Configuration Code Register on page 3-20](#).
- [ASIC Control Register on page 3-22](#).
- [ID Register on page 3-23](#).
- [Configuration Code Extension Register on page 3-24](#).
- [Extended External Input Selection Register on page 3-25](#).
- [Power-Down Status Register on page 3-26](#).
- [Peripheral Identification Registers on page 3-26](#).
- [ETM Component Identification Registers on page 3-29](#).
- [Integration Test Registers on page 3-30](#).

The *ARM® Embedded Trace Macrocell Architecture Specification* describes the other CoreSight ETM-R5 macrocell registers.

3.5.1 Main Control Register

The ETMCR characteristics are:

Purpose	Controls general operation of the ETM, such as whether tracing is enabled or coprocessor data is traced.
Usage constraints	There are no usage constraints.
Configurations	Available in all configurations.
Attributes	See the register summary in Table 3-1 on page 3-5 and Table 3-2 on page 3-10 .

[Figure 3-2](#) shows the ETMCR bit assignments.

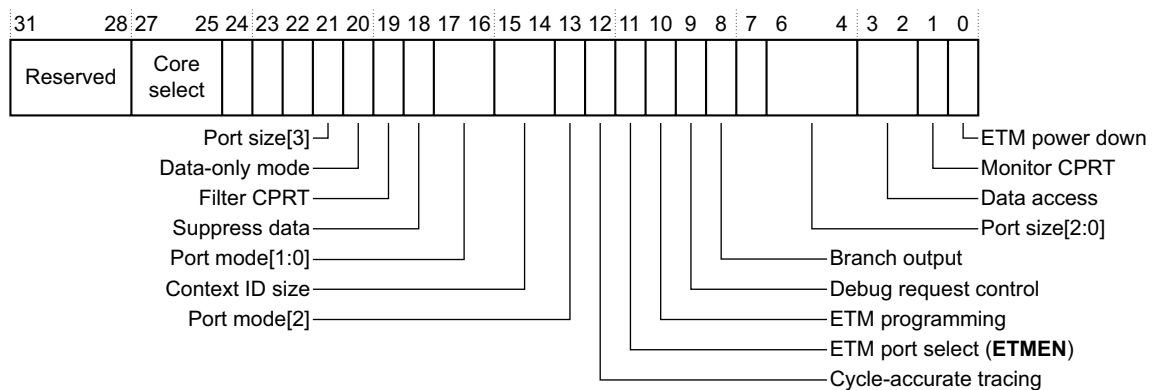


Figure 3-2 ETMCR bit assignments

Table 3-8 lists the ETMCR bit assignments.

Table 3-8 ETMCR bit assignments

Bit	Function	Access	Description
[31:28]	Reserved	RW	Must be written as 0.
[27:25]	Core select	RW	<p>If an ETM is shared between multiple CPUs, selects which CPU to trace. For the maximum value permitted, see bits[14:12] of the System Configuration Register. See the <i>ARM® Embedded Trace Macrocell Architecture Specification</i> for more information.</p> <p>To guarantee that the ETM is correctly synchronized to the new CPU, you must update these bits as follows:</p> <ol style="list-style-type: none"> 1. Set bit[10], ETM programming, and bit[0], ETM power down, to 1. 2. Change the core select bits. 3. Clear bit[0], ETM power down, to 0. 4. Perform other programming required as normal. <p>On an ETM reset this field is zero.</p>
[24]	Instrumentation resources access control	RO	The ETM-R5 macrocell does not implement any instrumentation resources and therefore this bit is RAZ.
[23]	Disable software writes	RO	The ETM-R5 macrocell does not support this feature and therefore this bit is RAZ.
[22]	Disable register writes from the debugger	RO	The ETM-R5 macrocell does not support this feature and therefore this bit is RAZ.
[21]	Port size[3]	RW	<p>Use this bit in conjunction with bits[6:4].</p> <p>On an ETM reset this bit is 0, corresponding to the 32-bit port size.</p>
[20]	Data-only mode	RW	<p>The possible values of this bit are:</p> <p>0 Instruction trace enabled.</p> <p>1 Instruction trace disabled. Data-only tracing is possible in this mode.</p> <p>On an ETM reset this bit is 0.</p>
[19]	Filter (CPRT)	RW	<p>Use this bit in conjunction with bit[1], the MonitorCPRT bit. For details see Filter Coprocessor Register Transfers (CPRT) in ETMv3.0 and later in the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>.</p> <p>On an ETM reset this bit is 0.</p>
[18]	Suppress data	RW	<p>Use this bit with bit[7] to suppress data. For details see Data suppression in the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>.</p> <p>On an ETM reset this bit is 0.</p>
[17:16]	Port mode[1:0]	RW	<p>These bits are used, in conjunction with bit[13], to set the trace port clocking mode. The ETM-R5 macrocell supports only dynamic mode, corresponding to the value b000, but you can write other values to these bits, and a read of the register returns the value written. Writing another value to these bits has no effect on the ETM.</p> <p>Bit[11] of the System Configuration Register indicates if these bits are set to select a supported clocking mode.</p> <p>On an ETM reset these bits are zero.</p> <p>For more information about trace port clocking modes see the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>.</p>

Table 3-8 ETMCR bit assignments (continued)

Bit	Function	Access	Description
[15:14]	Context ID size	RW	<p>The possible values of this field are:</p> <p>b00 No Context ID tracing.</p> <p>b01 Context ID bits[7:0] traced.</p> <p>b10 Context ID bits[15:0] traced.</p> <p>b11 Context ID bits[31:0] traced.</p> <p>———— Note ————</p> <p>Only the number of bytes specified are traced even if the new value is larger than this.</p> <p>On an ETM reset this field is zero.</p>
[13]	Port mode[2]	RW	<p>See the description of bits[17:16].</p> <p>On an ETM reset this bit is 0.</p>
[12]	Cycle-accurate tracing	RW	<p>Set this bit to 1 if you want the trace to include a precise cycle count of executed instructions. This is achieved by adding extra information into the trace, giving cycle counts even when TraceEnable is inactive.</p> <p>On an ETM reset this bit is 0.</p>
[11]	ETM port selection	RW	<p>This bit controls an external output, ETMEN. The possible values are:</p> <p>0 ETMEN is LOW.</p> <p>1 ETMEN is HIGH.</p> <p>You can use the ETMEN signal to control the routing of trace port signals to shared GPIO pins on your SoC, under the control of logic external to the ETM. Trace software tools must set this bit to 1 to ensure that trace output is enabled from this ETM.</p> <p>On an ETM reset this bit is 0.</p>
[10]	ETM programming	RW	<p>When set to 1, the ETM is being programmed. For more information, see ETM Programming bit and associated state in the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>.</p> <p>On an ETM reset this bit is set to 1.</p>
[9]	Debug request control	RW	<p>If you set this bit to 1, when the trigger event occurs, the DBGREQ output is asserted until DBGACK is observed. This enables the ARM processor to be forced into Debug state.</p> <p>On an ETM reset this bit is 0.</p>
[8]	Branch output	RW	<p>Set this bit to 1 if you want the ETM to output all branch addresses, even if the branch is because of a direct branch instruction. Setting this bit to 1 enables reconstruction of the program flow without having access to the memory image of the code being executed.</p> <p>On an ETM reset this bit is 0.</p>
[7]	Stall processor	RO	<p>The ETM-R5 macrocell does not implement FIFOFULL stalling of the processor, and therefore this bit is RAZ.</p>

Table 3-8 ETMCR bit assignments (continued)

Bit	Function	Access	Description
[6:4]	Port size[2:0]	RW	<p>Use this field with bit[21] to specify the port size.</p> <p>The port size determines how many external pins are available to output the trace information on ATDATA[31:0]. The ETM-R5 macrocell supports only the 32-bit port size, corresponding to a port size[2:0] value of b0100, but you can write other values to these bits, and a read of the register returns the value written. Writing another value to these bits has no effect on the ETM.</p> <p>Bit[10] of the System Configuration Register indicates if these bits are set to select an unsupported port size.</p> <p>For more information see the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>.</p> <p>On an ETM reset this field is b100, corresponding to the 32-bit port size.</p>
[3:2]	Data access	RW	<p>This field configures the data tracing mode. The possible values are:</p> <p>b00 No data tracing.</p> <p>b01 Trace only the data portion of the access.</p> <p>b10 Trace only the address portion of the access.</p> <p>b11 Trace both the address and the data of the access.</p> <p>On an ETM reset this field is 0.</p>
[1]	MonitorCPRT	RW	<p>This field controls whether CPRTs are traced. The possible values are:</p> <p>0 CPRTs not traced.</p> <p>1 CPRTs traced.</p> <p>This bit is used with bit[19]. For details see Filter Coprocessor Register Transfers (CPRT) in ETMv3.0 and later in the <i>ARM® Embedded Trace Macrocell Architecture Specification</i>.</p> <p>On an ETM reset this bit is 0.</p>
[0]	ETM power down	RW	<p>A pin controlled by this bit enables the ETM power to be controlled externally, see Control of ETM power down. The sense of this bit is inverted, and drives the ETMPWRUP signal.</p> <p>This bit must be cleared by the trace software tools at the beginning of a debug session.</p> <p>When this bit is set to 1, ETM tracing is disabled and accesses to any registers other than this register and the Lock Access Register are ignored.</p> <p>On an ETM reset this bit is set to 1.</p> <p>See Control of ETM power down for additional information on controlling ETM power down.</p>

Control of ETM power down

You can use the **ETMPWRUP** signal, controlled by the ETM power down bit of the ETMCR, to gate the clock to the logic in the ETM interface of the processor, to save power. Also, when you set the ETM power down bit to 1, the clock to most of the logic in the ETM is gated, disabling ETM tracing and leaving the ETM block operating in a low-power mode.

———— Note ————

You must not use the **ETMEN** signal to gate the ETM clock or any other functionality required for basic operation. You can use the **ETMEN** signal to control functionality that is required only for off-chip tracing, such as multiplexing between two ETMs. Use the **ETMPWRUP** signal to control basic operation of the ETM.

3.5.2 Configuration Code Register

The ETMCCR characteristics are:

Purpose	Indicates the configuration of the ETM-R5 macrocell.
Usage constraints	There are no usage constraints.
Configurations	Available in all configurations.
Attributes	See the register summary in Table 3-1 on page 3-5 and Table 3-2 on page 3-10 . If the MAXEXTOUT[1:0] and MAXEXTIN[2:0] signals are all tied LOW the ETMCCR has the value 0x8D014024.

[Figure 3-3](#) shows the ETMCCR bit assignments.

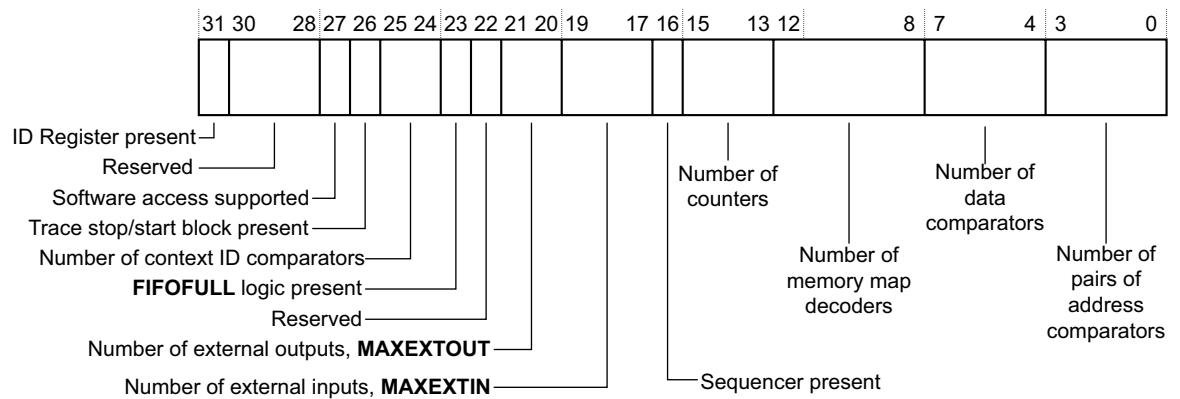


Figure 3-3 ETMCCR bit assignments

[Table 3-9](#) lists the ETMCCR bit assignments

Table 3-9 ETMCCR bit assignments

Bits	Value	Function
[31]	1	ETMIDR present.
[30:28]	b000	Reserved. <i>Read-As-Zero</i> (RAZ).
[27]	1	Software access is supported.
[26]	1	Trace start/stop block is present.
[25:24]	b01	Number of Context ID comparators.
[23]	0	FIFOFULL logic absent.
[22]	0	Reserved, Read-As-Zero. The <i>ARM® Embedded Trace Macrocell Architecture Specification</i> defines this as the most significant bit of the Number of external outputs field, see the description of bits[21:20].
[21:20]	-	Number of external outputs. Determined by the MAXEXTOUT[1:0] inputs. The maximum value of this field is 2, because CoreSight ETM-R5 supports a maximum of two external outputs.

Table 3-9 ETMCCR bit assignments (continued)

Bits	Value	Function
[19:17]	-	Number of external inputs. Determined by the MAXEXTIN[2:0] inputs. The maximum value of this field is 4, because CoreSight ETM-R5 supports a maximum of four external inputs.
[16]	1	The sequencer is present.
[15:13]	2	Number of counters.
[12:8]	0	Number of memory map decoders.
[7:4]	2	Number of data comparators.
[3:0]	4	Number of pairs of address comparators.

3.5.3 ASIC Control Register

The ETMASICCR characteristics are:

- Purpose** Controls the **ASICCTL[7:0]** signal.
- Usage constraints** There are no usage constraints.
- Configurations** Available in all configurations.
- Attributes** See the register summary in [Table 3-1 on page 3-5](#) and [Table 3-2 on page 3-10](#).

[Figure 3-4](#) shows the ETMASICCR bit assignments.




Figure 3-4 ETMASICCR bit assignments

[Table 3-10](#) lists the ETMASICCR bit assignments.

Table 3-10 ETMASICCR bit assignments

Bits	Function
[31:8]	Reserved.
[7:0]	ASICCTL[7:0]: When a bit in this field is set to 0 the corresponding bit of ASICCTL[7:0] is LOW. When a bit in this field is set to 1 the corresponding bit of ASICCTL[7:0] is HIGH. On an ETM reset, these bits are 0.

3.5.4 ID Register

The ETMIDR characteristics are:

Purpose	Identifies the implementation of ETM-R5 macrocell.
Usage constraints	There are no usage constraints.
Configurations	Available in all configurations.
Attributes	<p>This register has the value 0x4104F23x, where x depends on the release version of the macrocell, see the Implementation revision field description in ETMIDR bit assignments for more information.</p> <p>See the register summary in Table 3-1 on page 3-5 and Table 3-2 on page 3-10.</p>

Figure 3-5 shows the ETMIDR bit assignments.

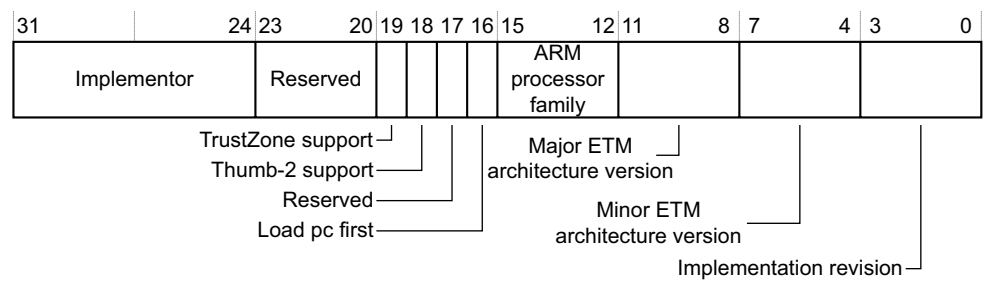


Figure 3-5 ETMIDR bit assignments

Table 3-11 lists the ETMIDR bit assignments.

Table 3-11 ETMIDR bit assignments

Bit numbers	Value	Function
[31:24]	0x41	Implementer = A (for ARM).
[23:20]	b0000	Reserved.
[19]	0	Security Extensions support. This bit is set to 1 if the processor supports the ARMv7 architecture Security Extensions. On the macrocell, this bit is not set (0), meaning that the ETM behaves as if the processor is in Secure state at all times.
[18]	1	Thumb-2 support. This bit is set to 1 if the processor supports the Thumb-2 architectural extensions. On the macrocell, this bit is set to 1, meaning that all 32-bit Thumb instructions are traced as a single instruction, including BL and BLX immediate.
[17]	0	Reserved.
[16]	0	If set to 1, load PC first. On the macrocell, this bit is not set (0), meaning that on an LSM ^a load operation with the PC included in the load list, the PC is <i>not</i> loaded first.
[15:12]	b1111	ARM processor family. The value of b1111 means that the processor family is defined elsewhere.

Table 3-11 ETMIDR bit assignments (continued)

Bit numbers	Value	Function
[11:8]	b0010	Major ETM architecture version number. A value of 0 in this field indicates ETMv1. For ETMv3.x, this field is set to 2.
[7:4]	b0011	Minor ETM architecture version number. For ETMv3.x, this field is set to 3.
[3:0]	b0010	Implementation revision. Value given is for the r2p0 release of the macrocell. For release r0p0 the value is b0000. For release r1p0 the value is b0001.

a. See the *ARM® Embedded Trace Macrocell Architecture Specification* for a definition and list of LSM operations.

3.5.5 Configuration Code Extension Register

The ETMCCER characteristics are:

Purpose Indicates the configuration of the extended external input bus.

Usage constraints There are no usage constraints.

Configurations Available in all configurations.

Attributes See the register summary in [Table 3-1 on page 3-5](#) and [Table 3-2 on page 3-10](#).

Figure 3-6 shows the ETMCCER bit assignments.

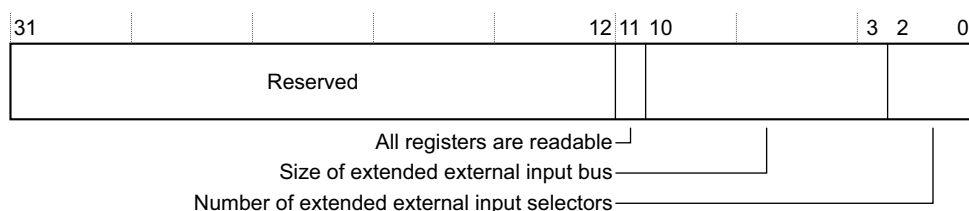


Figure 3-6 ETMCCER bit assignments

Table 3-12 lists the ETMCCER bit assignments.

Table 3-12 ETMCCER bit assignments

Bit numbers	Value	Function
[31:12]	0	Reserved, RAZ.
[11]	1	All registers, except some integration test registers, are readable. See Table 3-7 on page 3-15 for details of the access to integration test registers ^a .
[10:3]	55	Size of extended external input bus.
[2:0]	b010	Number of extended external input selectors.

a. Registers with names that start with IT are the Integration Test Registers, for example ITATBCTR1.

3.5.6 Extended External Input Selection Register

The ETMEXTINSELR Register characteristics are:

- Purpose** Specifies the extended external inputs, see the *ARM® Embedded Trace Macrocell Architecture Specification* for more information.
- Usage constraints** There are no usage constraints.
- Configurations** Available in all configurations.
- Attributes** See the register summary in [Table 3-1 on page 3-5](#) and [Table 3-5 on page 3-13](#).

[Figure 3-7](#) shows the ETMEXTINSELR bit assignments.

31								16	15							8	7									0
Reserved										Second extended external input selector					First extended external input selector											

Figure 3-7 ETMEXTINSELR bit assignments

[Table 3-13](#) lists the ETMEXTINSELR bit assignments.

Table 3-13 ETMEXTINSELR bit assignments

Bits	Description
[31:16]	Reserved, SBZP.
[15:8]	Second extended external input selector: Bits[15,14] Reserved, SBZP. Bits[13:8] Selection value for second external input.
[7:0]	First extended external input selector: Bits[7,6] Reserved, SBZP. Bits[5:0] Selection value for first external input.

3.5.7 Power-Down Status Register

The ETMPDSR characteristics are:

Purpose	Indicates the powerdown status of the ETM.
Usage constraints	There are no usage constraints.
Configurations	Available in all configurations.
Attributes	See the register summary in Table 3-1 on page 3-5 and Table 3-2 on page 3-10 .

[Figure 3-8](#) shows the ETMPDSR bit assignments.

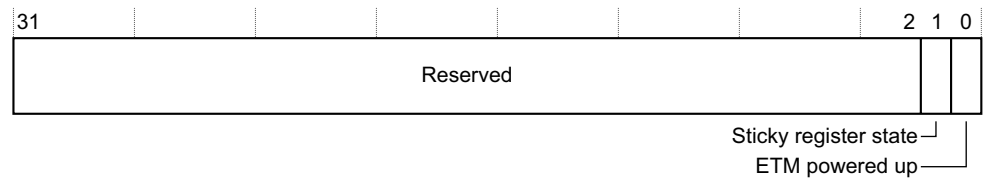


Figure 3-8 ETMPDSR bit assignments

[Table 3-14](#) lists the ETMPDSR bit assignments.

Table 3-14 ETMPDSR bit assignments

Bit numbers	Value	Function
[31:2]	0	Reserved, RAZ.
[1]	0	Sticky Register State. The ETM-R5 macrocell does not support multiple power domains so this bit is RAZ.
[0]	1	ETM Powered Up. The ETM Trace registers are accessible. The ETM-R5 macrocell does not support multiple power domains so this bit is <i>Read-As-One</i> (RAO).

3.5.8 Peripheral Identification Registers

The ETMPIDR0-ETMPIDR7 characteristics are:

Purpose	Provides the standard Peripheral ID required by all CoreSight components, see the <i>ARM® Embedded Trace Macrocell Architecture Specification</i> for more information.
Usage constraints	Only bits[7:0] of each register are used. This means that ETMPIDR0-ETMPIDR7 define a single 64-bit <i>Peripheral ID</i> , as Figure 3-9 on page 3-27 shows.
Configurations	Available in all configurations.
Attributes	See the register summary in Table 3-1 on page 3-5 and Table 3-6 on page 3-14 .

[Figure 3-9 on page 3-27](#) shows the mapping between ETMPIDR0-ETMPIDR7 and the single 64-bit *Peripheral ID* value.

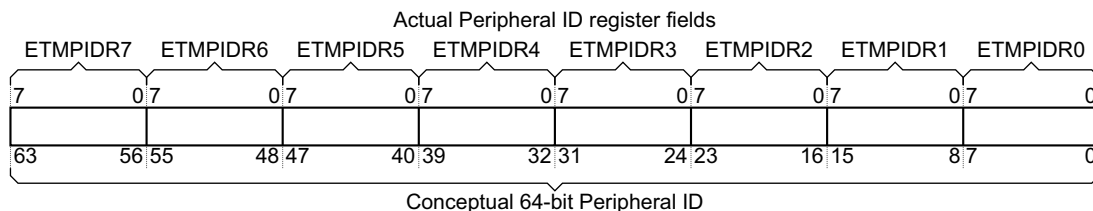


Figure 3-9 Mapping between ETMPIDR0-ETMPIDR7 and the Peripheral ID value

Figure 3-10 shows the Peripheral ID bit assignments in the single conceptual Peripheral ID register.

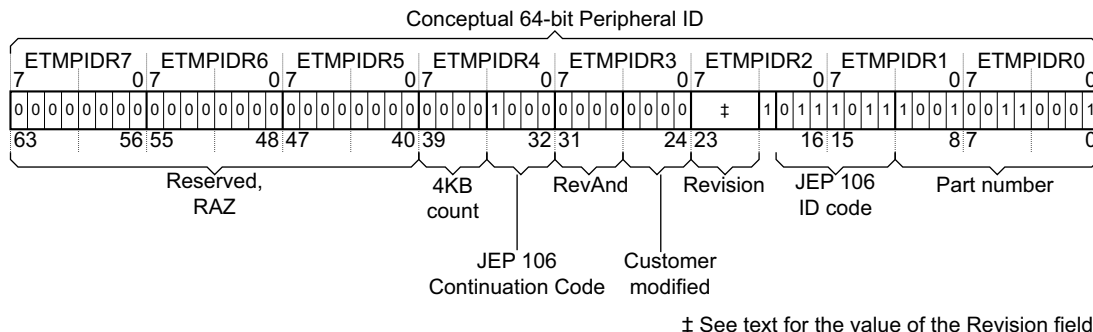


Figure 3-10 Peripheral ID fields

Table 3-15 lists the values of the fields when reading this set of registers. The *ARM® Embedded Trace Macrocell Architecture Specification* gives more information about many of these fields.

Table 3-15 ETMPIDR0-ETMPIDR7 bit assignments

Register	Register number	Register offset	Bit	Value	Description
ETMPIDR7	0x3F7	0xFDC	[31:8]	-	Unused, read undefined.
			[7:0]	0x00	Reserved for future use, RAZ.
ETMPIDR6	0x3F6	0xFD8	[31:8]	-	Unused, read undefined.
			[7:0]	0x00	Reserved for future use, RAZ.
ETMPIDR5	0x3F5	0xFD4	[31:8]	-	Unused, read undefined.
			[7:0]	0x00	Reserved for future use, RAZ.
ETMPIDR4	0x3F4	0xFD0	[31:8]	-	Unused, read undefined.
			[7:4]	0x0	n, where 2 ⁿ is number of 4KB blocks used.
			[3:0]	0x4	JEP 106 continuation code.
ETMPIDR3	0x3FB	0xFEC	[31:8]	-	Unused, read undefined.
			[7:4]	0x0	RevAnd (at top level). Manufacturer revision number.
			[3:0]	0x0	Customer Modified. 0x0 indicates from ARM.

Table 3-15 ETMPIDR0-ETMPIDR7 bit assignments (continued)

Register	Register number	Register offset	Bit	Value	Description
ETMPIDR2	0x3FA	0xFE8	[31:8]	-	Unused, read undefined.
			[7:4]	a	Revision Number of Peripheral. This value is the same as the Implementation revision field of the ETMIDR, see ID Register on page 3-23 .
			[3]	1	Always 1. Indicates that a JEDEC assigned value is used.
			[2:0]	b011	JEP 106 identity code[6:4].
ETMPIDR1	0x3F9	0xFE4	[31:8]	-	Unused, read undefined.
			[7:4]	b0001	JEP 106 identity code[3:0]
			[3:0]	0x9	Part Number[11:8]. Upper <i>Binary Coded Decimal</i> (BCD) value of Device Number.
ETMPIDR0	0x3F8	0xFE0	[31:8]	-	Unused, read undefined.
			[7:0]	0x31	Part Number[7:0]. Middle and Lower BCD value of Device Number.

a. See the Description column for details.

Note

In [Table 3-15 on page 3-27](#), the *Peripheral Identification Registers on page 3-26* are listed in order of register name, from most significant (ETMPIDR7) to least significant (ETMPIDR0). This does not match the order of the register offsets. Similarly, in [Table 3-16 on page 3-29](#) the *ETM Component Identification Registers on page 3-29* are listed in order of register name, from most significant (ETMCIDR3) to least significant (ETMCIDR0).

3.5.9 ETM Component Identification Registers

The ETMCIDR0-ETMCIDR3 characteristics are:

Purpose	Identifies the ETM as a CoreSight component. For more information, see the <i>ARM® Embedded Trace Macrocell Architecture Specification</i> .
Usage constraints	Only bits[7:0] of each register are used. This means that ETMCIDR0-ETMCIDR3 define a single 32-bit Component ID, as Figure 3-11 shows.
Configurations	Available in all configurations.
Attributes	See the register summary in Table 3-1 on page 3-5 and Table 3-6 on page 3-14 .

[Figure 3-11](#) shows the mapping between ETMCIDR0-ETMCIDR3 and the single 64-bit *Component ID* value,

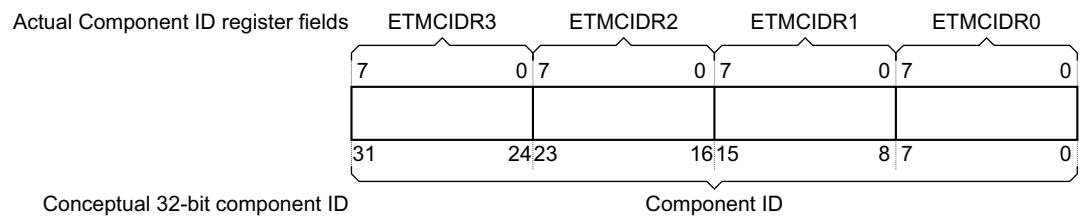


Figure 3-11 Mapping between ETMCIDR0-ETMCIDR3 and the Component ID value

[Table 3-16](#) lists the Component ID bit assignments in the single conceptual Component ID register.

Table 3-16 ETMCIDR0-ETMCIDR3, bit assignments

Register	Register number	Register offset	Bit	Value	Description
ETMCIDR3	0x3FF	0xFFC	[31:8]	-	Unused, read undefined.
			[7:0]	0xB1	Component identifier, bits[31:24].
ETMCIDR2	0x3FE	0xFF8	[31:8]	-	Unused, read undefined.
			[7:0]	0x05	Component identifier, bits[23:16].
ETMCIDR1	0x3FD	0xFF4	[31:8]	-	Unused, read undefined.
			[7:4]	0x9	Component class (component identifier, bits[15:12]).
			[3:0]	0x0	Component identifier, bits[11:8].
ETMCIDR0	0x3FC	0xFF0	[31:8]	-	Unused, read undefined.
			[7:0]	0x0D	Component identifier, bits[7:0].

3.5.10 Integration Test Registers

The following subsections describe the Integration Test Registers. To access these registers you must first set bit[0] of the *Integration Mode Control Register* (ETMITCTRL) to 1.

- You can use the write-only Integration Test Registers to set the outputs of some of the ETM signals. [Table 3-17](#) lists the signals that can be controlled in this way.
- You can use the read-only Integration Test Registers to read the state of some of the ETM input signals. [Table 3-18](#) lists the signals that can be read in this way.

See the *ARM® Embedded Trace Macrocell Architecture Specification* for more information.

Table 3-17 Output signals that the Integration Test Registers can control

Signal	Register	Bit	Register description
AFREADY	ITATBCTR0	[1]	See <i>ATB Control Register 0</i> on page 3-41
ATBYTES[1:0]	ITATBCTR0	[9:8]	See <i>ATB Control Register 0</i> on page 3-41
ATDATA[31, 23, 15, 7, 0]	ITATBDATA0	[4:0]	See <i>ATB Data Register 0</i> on page 3-38
ATID[6:0]	ITATBCTR1	[6:0]	See <i>ATB Control Register 1</i> on page 3-40
ATVALID	ITATBCTR0	[0]	See <i>ATB Control Register 0</i> on page 3-41
ETMDBGRQ	ITMISCOUT	[4]	See <i>Miscellaneous Outputs Register</i> on page 3-34
EXTOUT[1:0]	ITMISCOUT	[9:8]	See <i>Miscellaneous Outputs Register</i> on page 3-34
nETMWFIREADY	ITMISCOUT	[5]	See <i>Miscellaneous Outputs Register</i> on page 3-34
TRIGGER	ITTRIGGERREQ	[0]	See <i>Trigger Request Register</i> on page 3-37

Table 3-18 Input signals that the Integration Test Registers can read

Signal	Register	Bit	Register description
AFVALID	ITATBCTR2	[1]	See <i>ATB Control Register 2</i> on page 3-39
ATREADY	ITATBCTR2	[0]	See <i>ATB Control Register 2</i> on page 3-39
DBGACK	ITMISCIN	[4]	See <i>Miscellaneous Inputs Register</i> on page 3-35
ETMCID[31, 0]	ITETMIF	[11:10]	See <i>Processor-ETM Interface Register</i> on page 3-32
ETMDA[31, 0]	ITETMIF	[7:6]	See <i>Processor-ETM Interface Register</i> on page 3-32
ETMDCTL[11, 0]	ITETMIF	[5:4]	See <i>Processor-ETM Interface Register</i> on page 3-32
ETMDD[63, 0]	ITETMIF	[9:8]	See <i>Processor-ETM Interface Register</i> on page 3-32
ETMIA[31, 1]	ITETMIF	[3:2]	See <i>Processor-ETM Interface Register</i> on page 3-32
ETMICTL[13, 0]	ITETMIF	[1:0]	See <i>Processor-ETM Interface Register</i> on page 3-32
ETMWFIPENDING	ITMISCIN	[5]	See <i>Miscellaneous Inputs Register</i> on page 3-35
EVNTBUS[54, 0]	ITETMIF	[14:12]	See <i>Processor-ETM Interface Register</i> on page 3-32
EXTIN[3:0]	ITMISCIN	[3:0]	See <i>Miscellaneous Inputs Register</i> on page 3-35
TRIGGERACK	ITTRIGGERACK	[0]	See <i>Trigger Acknowledge Register</i> on page 3-36

Using the Integration Test Registers

Bit[0] of the ETMITCTRL register has the following functionality:

When bit[0] of ETMITCTRL is set to 1:

- Values written to the write-only integration test registers map onto the specified outputs of the macrocell. For example, writing 0x3 to ITMISCOUT[9:8] causes **EXTOUT[1:0]** to take the value 0x3.
- Values read from the read-only integration test registers correspond to the values of the specified inputs of the macrocell. For example, if you read ITMISCIN[3:0] you obtain the value of **EXTIN[3:0]**.

When bit[0] of ETMITCTRL is set to 0:

- Reading an Integration Test Register returns an Unpredictable value.
- The effect of attempting to write to an Integration Test Register, other than the read-only Integration Test Registers, is Unpredictable.

———— Note ————

You must not attempt to write to an Integration Test Register unless you have set bit[0] of ETMITCTRL to 1.

See the *ARM® Embedded Trace Macrocell Architecture Specification* for more details of ETMITCTRL.

Processor-ETM Interface Register

The ITETMIF characteristics are:

Purpose	Reads the state of the ETM input pins shown in Table 3-19 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The value of the register depends on the signals on the input pins when the register is read.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-12](#) shows the ITETMIF bit assignments.

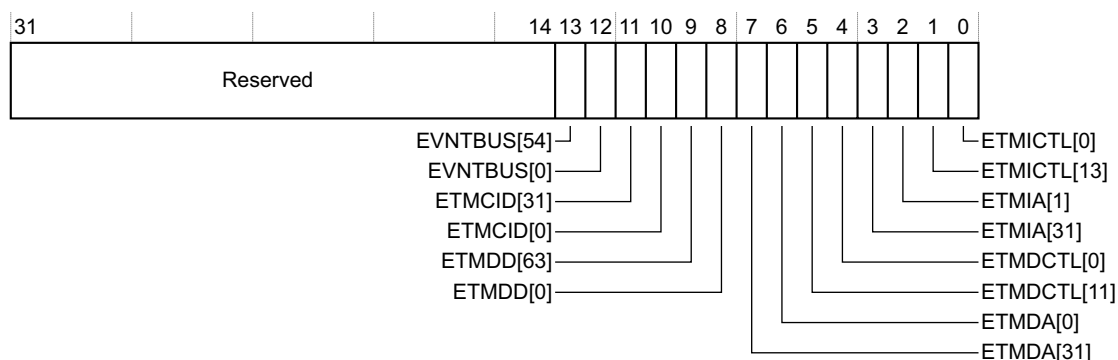


Figure 3-12 ITETMIF bit assignments

[Table 3-19](#) lists the ITETMIF bit assignments.

Table 3-19 ITETMIF bit assignments

Bits	Name	Function
[31:14]	-	Reserved. Read undefined.
[13]	EVNTBUS[54]	Returns the value of the EVNTBUS[54] input pin. ^a
[12]	EVNTBUS[0]	Returns the value of the EVNTBUS[0] input pin. ^a
[11]	ETMCID[31]	Returns the value of the ETMCID[31] input pin. ^a
[10]	ETMCID[0]	Returns the value of the ETMCID[0] input pin. ^a
[9]	ETMDD[63]	Returns the value of the ETMDD[63] input pin. ^a
[8]	ETMDD[0]	Returns the value of the ETMDD[0] input pin. ^a
[7]	ETMDA[31]	Returns the value of the ETMDA[31] input pin. ^a
[6]	ETMDA[0]	Returns the value of the ETMDA[0] input pin. ^a
[5]	ETMDCTL[11]	Returns the value of the ETMDCTL[11] input pin. ^a
[4]	ETMDCTL[0]	Returns the value of the ETMDCTL[0] input pin. ^a
[3]	ETMIA[31]	Returns the value of the ETMIA[31] input pin. ^a

Table 3-19 ITETMIF bit assignments (continued)

Bits	Name	Function
[2]	ETMIA[1]	Returns the value of the ETMIA[1] input pin ^a .
[1]	ETMICTL[13]	Returns the value of the ETMICTL[13] input pin ^a .
[0]	ETMICTL[0]	Returns the value of the ETMICTL[0] input pin ^a .

- a. When a bit is set to 0, the corresponding input pin is LOW.
When a bit is set to 1, the corresponding input pin is HIGH.
The ITETMIF bit values always correspond to the physical state of the input pins.

Miscellaneous Outputs Register

The ITMISCOUT characteristics are:

Purpose	Sets the state of the output pins shown in Table 3-20 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The value of the register sets the signals on the output pins when the register is written.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-13](#) shows the ITMISCOUT bit assignments.

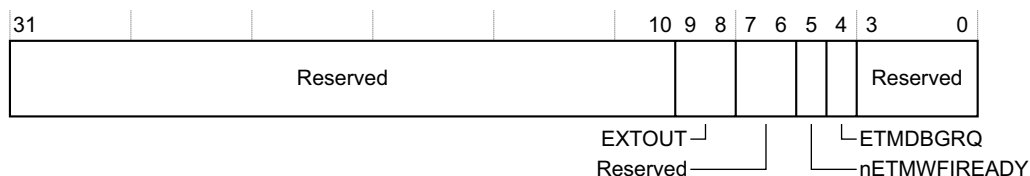


Figure 3-13 ITMISCOUT bit assignments

[Table 3-20](#) lists the ITMISCOUT bit assignments.

Table 3-20 ITMISCOUT bit assignments

Bits	Name	Function
[31:10]	-	Reserved. Write as zero.
[9:8]	EXTOUT	Drives the EXTOUT[1:0] output pins ^a .
[7:6]	-	Reserved. Write as zero.
[5]	ETMWFIREADY	Drives the nETMWFIREADY output pin ^a .
[4]	ETMDBGRQ	Drives the ETMDBGRQ output pin ^a .
[3:0]	-	Reserved. Write as zero.

- a. When an input pin is LOW, the corresponding register bit is 0.
When an input pin is HIGH, the corresponding register bit is 1.
The ITMISCOUT bit values correspond to the physical state of the output pins.

Miscellaneous Inputs Register

The ITMISCIN characteristics are:

Purpose	Reads the state of the input pins shown in Table 3-21 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits depend on the signals on the input pins when the register is read.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-14](#) shows the ITMISCIN bit assignments.

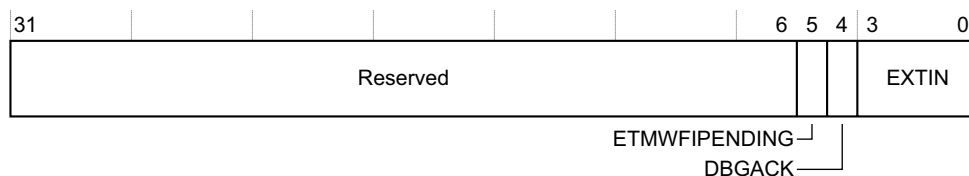


Figure 3-14 ITMISCIN bit assignments

[Table 3-21](#) lists the ITMISCIN bit assignments.

Table 3-21 ITMISCIN bit assignments

Bits	Name	Function
[31:6]	-	Reserved. Read Undefined.
[5]	ETMWFIPENDING	Returns the value of the ETMWFIPENDING input pin ^a .
[4]	DBGACK	Returns the value of the DBGACK input pin ^a .
[3:0]	EXTIN	Returns the value of the EXTIN [3:0] input pins ^a .

- a. When an input pin is LOW, the corresponding register bit is 0.
When an input pin is HIGH, the corresponding register bit is 1.
The ITMISCIN bit values always correspond to the physical state of the input pins.

Trigger Acknowledge Register

The ITTRIGGERACK characteristics are:

Purpose	Reads the state of the TRIGGERACK input pin shown in Table 3-22 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits depend on the signal on the input pin when the register is read.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-15](#) shows the ITTRIGGERACK bit assignments.

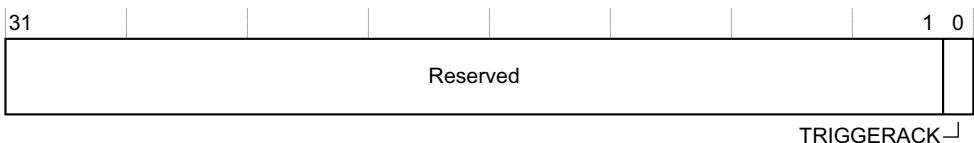


Figure 3-15 ITTRIGGERACK bit assignments

[Table 3-22](#) lists the ITTRIGGERACK bit assignments.

Table 3-22 ITTRIGGERACK bit assignments

Bits	Name	Function
[31:1]	-	Reserved. Read Undefined.
[0]	TRIGGERACK	Returns the value of the TRIGGERACK input pin ^a .

- a. When the **TRIGGERACK** input pin is LOW, the register bit is 0.
When the **TRIGGERACK** input pin is HIGH, the register bit is 1.
The ITTRIGGERACK bit value always corresponds to the physical state of the input pin.

Trigger Request Register

The ITTRIGGERREQ characteristics are:

Purpose	Sets the TRIGGER output pin shown in Table 3-23 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits set the signals on the output pin when the register is written.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-16](#) shows the ITTRIGGERREQ bit assignments.

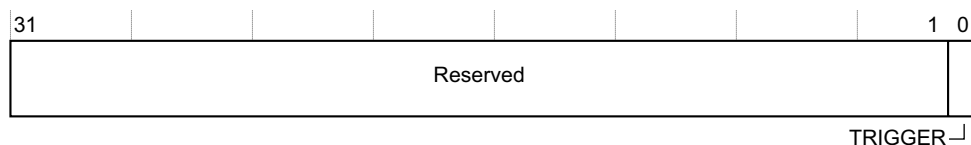


Figure 3-16 ITTRIGGERREQ bit assignments

[Table 3-23](#) lists the ITTRIGGERREQ bit assignments.

Table 3-23 ITTRIGGERREQ bit assignments

Bits	Name	Function
[31:1]	-	Reserved. Write as zero.
[0]	TRIGGER	Drives the TRIGGER output pin ^a .

- a. When the ITTRIGGERREQ register bit is set to 0, the **TRIGGER** output pin is LOW.
When the ITTRIGGERREQ register bit is set to 1, the **TRIGGER** output pin is HIGH.
The ITTRIGGERREQ bit values always correspond to the physical state of the output pins.

ATB Data Register 0

The ITATBDATA0 characteristics are:

Purpose	Sets the state of the ATDATA output pins shown in Table 3-24 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits set the signals on the output pins when the register is written.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-17](#) shows the ITATBDATA0 bit assignments.




Figure 3-17 ITATBDATA0 bit assignments

[Table 3-24](#) lists the ITATBDATA0 bit assignments.

Table 3-24 ITATBDATA0 bit assignments

Bits	Name	Function
[31:5]	-	Reserved. Write as zero.
[4:0]	ATDATA	Drives the ATDATA[31, 23, 15, 7, 0] output pins ^a .

- a. When a bit is set to 0, the corresponding output pin is LOW.
When a bit is set to 1, the corresponding output pin is HIGH.
The ITATBDATA0 bit values always correspond to the physical state of the output pins.

ATB Control Register 2

The ITATBCTR2 characteristics are:

Purpose	Reads the state of the AFVALID and ATREADY input pins from the ATB bus, as shown in Table 3-25 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits depend on the signals on the input pins when the register is read.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-18](#) shows the ITATBCTR2 bit assignments.

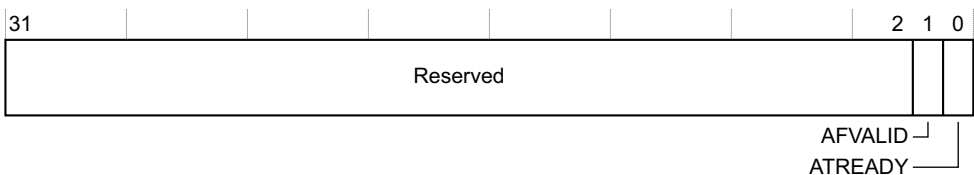


Figure 3-18 ITATBCTR2 bit assignments

[Table 3-25](#) lists the ITATBCTR2 bit assignments.

Table 3-25 ITATBCTR2 bit assignments

Bits	Name	Function
[31:2]	-	Reserved. Read undefined.
[1]	AFVALID	Returns the value of the AFVALID input pin ^a .
[0]	ATREADY	Returns the value of the ATREADY input pin ^a .

- a. When an input pin is LOW, the corresponding register bit is 0.
When an input pin is HIGH, the corresponding register bit is 1.
The ITATBCTR2 bit values always correspond to the physical state of the input pins.

ATB Control Register 1

The ITATBCTR1 characteristics are:

Purpose	Sets the state of the ATID output pins shown in Table 3-26 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits set the signals on the output pins when the register is written.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-19](#) shows the ITATBCTR1 bit assignments.




Figure 3-19 ITATBCTR1 bit assignments

[Table 3-26](#) lists the ITATBCTR1 bit assignments.

Table 3-26 ITATBCTR1 bit assignments

Bits	Name	Function
[31:7]	-	Reserved. Write as zero.
[6:0]	ATID	Drives the ATID[6:0] output pins ^a .

- a. When a bit is set to 0, the corresponding output pin is LOW.
When a bit is set to 1, the corresponding output pin is HIGH.
The ITATBCTR1 bit values always correspond to the physical state of the output pins.

ATB Control Register 0

The ITATBCTR0 characteristics are:

Purpose	Sets the state of the output pins shown in Table 3-27 .
Usage constraints	<ul style="list-style-type: none"> Available when bit[0] of ETMITCTRL is set to 1. The values of the register bits set the signals on the output pins when the register is written.
Configurations	Available in all configurations.
Attributes	See the register summaries in Table 3-1 on page 3-5 , Table 3-7 on page 3-15 , and Table 3-18 on page 3-30 .

[Figure 3-20](#) shows the ITATBCTR0 bit assignments.

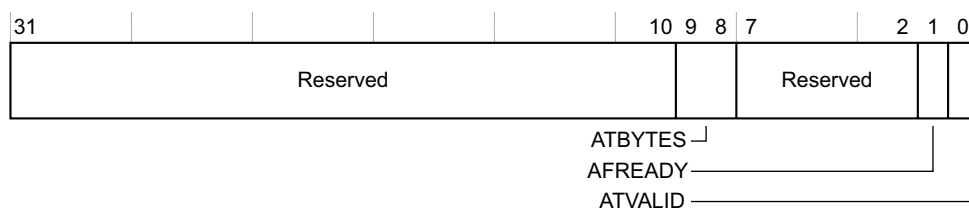


Figure 3-20 ITATBCTR0 bit assignments

[Table 3-27](#) lists the ITATBCTR0 bit assignments.

Table 3-27 ITATBCTR0 bit assignments

Bits	Name	Function
[31:10]	-	Reserved. Write as zero.
[9:8]	ATBYTES	Drives the ATBYTES[1:0] output pins ^a .
[7:2]	-	Reserved. Write as zero.
[1]	AFREADY	Drives the AFREADY output pin ^a .
[0]	ATVALID	Drives the ATVALID output pin ^a .

- a. When a bit is set to 0, the corresponding output pin is LOW.
When a bit is set to 1, the corresponding output pin is HIGH.
The ITATBCTR0 bit values always correspond to the physical state of the output pins.

Appendix A

Signal Descriptions

This appendix describes the signals used in the macrocell. It contains the following sections:

- *Signal descriptions* on page A-2.
- *Clocks and resets* on page A-4.
- *Processor trace interface* on page A-5.
- *APB interface* on page A-6.
- *ATB interface* on page A-7.
- *ETM-R5 macrocell sharing signals* on page A-9.
- *Test interface* on page A-10.

A.1 Signal descriptions

Table A-1 lists the ETM-R5 macrocell signals in alphabetical order. The following sections show the signal directions and the clock domains, for each of the interfaces.

Table A-1 ETM-R5 macrocell signals

Signal name	Description
AFREADY	<i>ATB interface on page A-7</i>
AFVALID	<i>ATB interface on page A-7</i>
ASICCTL[7:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
ATBYTES[1:0]	<i>ATB interface on page A-7</i>
ATCLK	<i>Clocks and resets on page A-4</i>
ATCLKEN	<i>Clocks and resets on page A-4</i>
ATDATA[31:0]	<i>ATB interface on page A-7</i>
ATID[6:0]	<i>ATB interface on page A-7</i>
ATREADY	<i>ATB interface on page A-7</i>
ATVALID	<i>ATB interface on page A-7</i>
CLK	<i>Clocks and resets on page A-4</i>
CORESELECT[2:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
DBGACK	<i>Processor trace interface on page A-5</i>
DBGEN	<i>ETM-R5 macrocell sharing signals on page A-9</i>
ETMCID[31:0]	<i>Processor trace interface on page A-5</i>
ETMDA[31:0]	<i>Processor trace interface on page A-5</i>
ETMDBGRQ	<i>Processor trace interface on page A-5</i>
ETMDCTL[11:0]	<i>Processor trace interface on page A-5</i>
ETMDD[63:0]	<i>Processor trace interface on page A-5</i>
ETMEN	<i>ATB interface on page A-7</i>
ETMIA[31:1]	<i>Processor trace interface on page A-5</i>
ETMICTL[13:0]	<i>Processor trace interface on page A-5</i>
ETMPWRUP	<i>Processor trace interface on page A-5</i>
ETMWFIPENDING	<i>Processor trace interface on page A-5</i>
EVNTBUS[54:0]	<i>Processor trace interface on page A-5</i>
EXTIN[3:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
EXTOUT[1:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>

Table A-1 ETM-R5 macrocell signals (continued)

Signal name	Description
FIFOPEEK[6:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
MAXCORES[2:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
MAXEXTIN[2:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
MAXEXTOUT[1:0]	<i>ETM-R5 macrocell sharing signals on page A-9</i>
nETMWFIREADY	<i>Processor trace interface on page A-5</i>
NIDEN	<i>ETM-R5 macrocell sharing signals on page A-9</i>
PADDRDBG[11:2]	<i>APB interface on page A-6</i>
PADDRDBG31	<i>APB interface on page A-6</i>
PCLKDBG	<i>Clocks and resets on page A-4</i>
PCLKENDBG	<i>Clocks and resets on page A-4</i>
PENABLEDBG	<i>APB interface on page A-6</i>
PRDATADB[31:0]	<i>APB interface on page A-6</i>
PREADYDBG	<i>APB interface on page A-6</i>
PRESETDBGn	<i>Clocks and resets on page A-4</i>
PSELDBG	<i>APB interface on page A-6</i>
PWDATADB[31:0]	<i>APB interface on page A-6</i>
PWRITEDBG	<i>APB interface on page A-6</i>
RSTBYPASS	<i>Test interface on page A-10</i>
SE	<i>Test interface on page A-10</i>
nSYSPORESET	<i>Clocks and resets on page A-4</i>
TRIGGER	<i>The trigger signals on page A-8</i>
TRIGGERACK	<i>The trigger signals on page A-8</i>
TRIGSBYPASS	<i>The trigger signals on page A-8</i>

A.2 Clocks and resets

Table A-2 lists the clock and reset signals. Clock domains, where specified, give the clock that input signals must be generated and output signals sampled.

Table A-2 Clock and reset signals

Signal name	Type	Description
CLK	Input	This is the main clock for the ETM-R5 macrocell.
ATCLK	Input	ATB interface clock.
ATCLKEN	Input	Enable signal for ATCLK .
PCLKDBG	Input	Debug APB clock.
PCLKENDBG	Input	Debug APB clock enable.
PRESETDBGn	Input	Debug APB interface reset. Resets all registers.
nSYSPORESET	Input	Powerup (main) reset. Resets all registers.

A.3 Processor trace interface

Table A-3 lists the trace interface signals from the Cortex-R5. Clock domains, where specified, give the clock that input signals must be generated and output signals sampled.

Table A-3 Processor trace interface signals

Signal name	Type	Description
ETMCTL[13:0]	Input	Instruction control signals.
ETMIA[31:1]	Input	Address for executed instruction.
ETMDCTL[11:0]	Input	Data control signals.
ETMDA[31:0]	Input	Address for data transfer.
ETMDD[63:0]	Input	Contains the data value for a Load, Store, MRC, or MCR instruction.
ETMCID[31:0]	Input	Current value of the processor Context ID Register.
EVNTBUS[54:0]	Input	Gives the status of the performance monitoring events. Used as extended external inputs.
ETMWFIPENDING	Input	Indicates that the Cortex-R5 processor is about to go into Standby mode, and that the ETM must drain its FIFO.
nETMWFIREADY	Output	Indicates that the macrocell FIFO is empty and that the Cortex-R5 processor can be put into Standby mode.
ETMDBGRQ	Output	Request from the macrocell for the core to enter debug state. This must be ORed with any ASIC-level DBGGRQ signals before being connected to the core EDBGRQ input.
DBGACK	Input	Indicates that the core is in debug state. This signal is connected to the core general purpose DBGACK output, so that it can determine when ETMDBGRQ can be deasserted. It is also used for other purposes in the ETM, and care must be taken to ensure the timing of this signal is appropriate because it does not come through the main interface between the core and the ETM.
ETMPWRUP	Output	When HIGH, indicates that the macrocell is in use. When LOW: <ul style="list-style-type: none"> External logic supporting the macrocell can be clock-gated to conserve power. The Cortex-R5 processor disables the interface. Logic within the macrocell is clock-gated to conserve power.

A.4 APB interface

Table A-4 lists the APB signals. Clock domains, where specified, give the clock that input signals must be generated and output signals sampled.

Table A-4 APB signals

Signal name	Type	Description
PADDRDBG[11:2]	Input	Debug APB Address Bus.
PADDRDBG31	Input	Originates as an output signal from the DAP: <ul style="list-style-type: none"> PADDRDBG31 at logic 1 indicates an access from hardware (JTAG). PADDRDBG31 at logic 0 indicates an access from software.
PENABLEDBG	Input	The Debug APB interface is enabled for a transfer.
PSELDBG	Input	Debug APB slave select signal.
PREADYDBG	Output	Extend Debug APB transfers.
PRDATADB[31:0]	Output	Debug APB read data.
PWDATADB[31:0]	Input	Debug APB write data.
PWRITEDBG	Input	Debug APB transfer direction: 0 is Read, 1 is Write.

A.5 ATB interface

Table A-5 lists the ATB signals. Clock domains, where specified, give the clock that input signals must be generated and output signals sampled.

Table A-5 ATB signals

Signal name	Type	Description
AFREADY	Output	ATB interface FIFO flush finished.
AFVALID	Input	ATB interface FIFO flush request.
ATBYTES[1:0]	Output	Size of ATDATA .
ATDATA[31:0]	Output	ATB interface data.
ATID[6:0]	Output	ATB interface trace source ID.
ATREADY	Input	ATDATA can be accepted.
ATVALID	Output	ATB interface data valid.
ETMEN	Output	Enable signal for trace output from the ETM, driven by bit[11] of the ETMCR.

A.5.1 The trigger signals

Table A-6 lists the trigger signals. Clock domains, where specified, give the clock that input signals must be generated and output signals sampled.

Table A-6 Trigger signals

Signal name	Type	Description
TRIGGER	Output	Trigger request status signal.
TRIGGERACK	Input	ATB trigger acknowledge.
TRIGSBYPASS	Input	Trigger synchronization bypass.

The **TRIGSBYPASS**, **TRIGGER**, and **TRIGGERACK** signals control trigger behavior and indicate when a trigger occurs.

TRIGSBYPASS controls whether asynchronous registering and handshaking is performed:

- When **TRIGSBYPASS** is HIGH, **TRIGGER** is asserted for one **ATCLK** cycle, and **TRIGGERACK** is ignored.
- When **TRIGSBYPASS** is LOW, **TRIGGER** is asserted, and is held until **TRIGGERACK** is asserted. When **TRIGGERACK** is asserted, **TRIGGER** is de-asserted.

TRIGGERACK is synchronized to the **ATCLK** clock domain inside the ETM, using double registers.

A.6 ETM-R5 macrocell sharing signals

Table A-7 lists the ETM-R5 macrocell sharing signals. Clock domains, where specified, give the clock that input signals must be generated and output signals sampled.

Table A-7 Miscellaneous signals

Signal name	Type	Description
CORESELECT[2:0]	Output	Where an ETM is shared between multiple CPUs, this signal specifies which CPU to trace. The value appears as bits[14:12] of the System Configuration Register.
MAXCORES[2:0]	Input	Where an ETM is shared between multiple cores, this signal specifies the number of CPUs the ETM can trace. It must be tied to the number of CPUs sharing the ETM minus 1. These signals determine the value of bits[14:12] of the System Configuration register, see the footnote to Table 3-1 on page 3-5 .
ASICCTL[7:0]	Output	General purpose outputs controlled by the ETMASICCR. See ASIC Control Register on page 3-22 .
DBGEN	Input	Invasive debug enable. When HIGH indicates that invasive debug is enabled.
NIDEN	Input	Non-invasive debug enable. When HIGH indicates that non-invasive debug is enabled.
EXTIN[3:0]	Input	External input resources.
EXTOUT[1:0]	Output	External outputs.
MAXEXTIN[2:0]	Input	Number of external inputs supported by the ASIC (maximum 4). These signals determine the value bits[19:17] in the ETMCCR, see Configuration Code Register on page 3-20 .
MAXEXTOUT[1:0]	Input	Number of external outputs supported by the ASIC (maximum 2). These signals determine the value bits[22:20] in the ETMCCR, see Configuration Code Register on page 3-20 .
FIFOPEEK[6:0]	Output	For validation purposes only. Indicates when various events occur before being written to the FIFO.

A.7 Test interface

Table A-8 lists the scan chain signals.

Table A-8 Test signals

Signal name	Type	Description
RSTBYPASS	Input	Reset synchronization bypass DFT signal.
SE	Input	Scan enable DFT signal.

Appendix B

AC Characteristics

This appendix describes the macrocell input and output signal timing. It contains the following section:

- [*ETM-R5 macrocell input and output signal timing parameters on page B-2.*](#)

B.1 ETM-R5 macrocell input and output signal timing parameters

Signals are classified according to the percentage of the clock period taken up by internal logic.

- For inputs this is the delay between the input port and the first register.
- For outputs this is the delay between the last register and the output port.

The timing classifications used are based on these delays:

Early The delay is less than 20% of the period.

Middle The delay is between 20% and 80% of the period.

Late The delay is greater than 80% of the period.

Table B-1 describes the ETM-R5 macrocell signal timing parameters.

Table B-1 ETM-R5 macrocell signal timing parameters

Signal name	Timing classification	Input/Output
AFREADY	Middle	Output
AFVALID	Middle	Input
ASICCTL[7:0]	Middle	Output
ATBYTES[1:0]	Middle	Output
ATCLK	-	Input
ATCLKEN	Middle	Input
ATDATA[31:0]	Middle	Output
ATID[6:0]	Middle	Output
ATREADY	Middle	Input
ATVALID	Middle	Output
CLK	-	Input
CORESELECT[2:0]	Middle	Output
DBGACK	Middle	Input
DBGEN	Middle	Input
ETMCID[31:0]	Middle	Input
ETMDA[31:0]	Middle	Input
ETMDBGRQ	Middle	Output
ETMDD[63:0]	Middle	Input
ETMDCTL[11:0]	Middle	Input
ETMEN	Middle	Output
ETMIA[31:1]	Middle	Input
ETMICTL[13:0]	Middle	Input
ETMPWRUP	Middle	Output
ETMWFIPENDING	Middle	Input
EVNTBUS[54:0]	Middle	Input

Table B-1 ETM-R5 macrocell signal timing parameters (continued)

Signal name	Timing classification	Input/Output
EXTIN[3:0]	Middle	Input
EXTOUT[1:0]	Middle	Output
FIFOPEEK[6:0]	Middle	Output
MAXCORES[2:0]	Middle	Input
MAXEXTIN[2:0]	Middle	Input
MAXEXTOUT[1:0]	Middle	Input
nETMWFIREADY	Middle	Output
NIDEN	Middle	Input
PADDRDBG[11:2]	Middle	Input
PADDRDBG31	Middle	Input
PCLKDBG	Middle	Input
PCLKENDBG	Middle	Input
PENABLEDBG	Middle	Input
PRDATADBG[31:0]	Middle	Output
PREADYDBG	Late	Output
PRESETDBGn	Late	Input
PSELDBG	Middle	Input
PWDATADBG[31:0]	Middle	Input
PWRITEDBG	Middle	Input
RSTBYPASS	Middle	Input
SE	Middle	Input
nSYSPORESET	Middle	Input
TRIGGER	Middle	Output
TRIGGERACK	Middle	Input
TRIGSBYPASS	Middle	Input

Note

Actual clock frequencies and input and output timing constraints vary according to application requirements and the silicon process technologies used. The maximum operating clock frequencies change according to the constraints and the process technology you use.

Appendix C

Revisions

This appendix describes the technical changes between released issues of this book.

Table C-1 Issue A

Change	Location	Affects
First release	-	-

Table C-2 Differences between issue A and issue B

Change	Location	Affects
The clock domain for the CoreSight Trace ID register was changed to ATCLK instead of CLK	Table 3-2 on page 3-10	All revisions
ETMCCER reset value	Table 3-1 on page 3-5	All revisions
ETMLSR reset value	Table 3-1 on page 3-5	All revisions
Footnote added to clarify the register access for the ETMLSR and ETMLAR	Table 3-1 on page 3-5	All revisions
Footnote added to clarify ETMLSR reset value	Table 3-1 on page 3-5	All revisions
Bit field value [10:3] for ETMCCER changed from 47 to 55	Table 3-12 on page 3-24	All revisions