ARM® Compiler

Version 6.02

ARM C and C++ Libraries and Floating-Point Support
User Guide



ARM® Compiler

ARM C and C++ Libraries and Floating-Point Support User Guide

Copyright © 2014, 2015 ARM. All rights reserved.

Release Information

Document History

Issue	Date	Confidentiality	Change
A	14 March 2014	Non-Confidential	ARM Compiler v6.00 Release
В	15 December 2014	Non-Confidential	ARM Compiler v6.01 Release
С	30 June 2015	Non-Confidential	ARM Compiler v6.02 Release

Non-Confidential Proprietary Notice

This document is protected by copyright and other related rights and the practice or implementation of the information contained in this document may be protected by one or more patents or pending patent applications. No part of this document may be reproduced in any form by any means without the express prior written permission of ARM. No license, express or implied, by estoppel or otherwise to any intellectual property rights is granted by this document unless specifically stated.

Your access to the information in this document is conditional upon your acceptance that you will not use or permit others to use the information for the purposes of determining whether implementations infringe any third party patents.

THIS DOCUMENT IS PROVIDED "AS IS". ARM PROVIDES NO REPRESENTATIONS AND NO WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTORY QUALITY, NON-INFRINGEMENT OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE DOCUMENT. For the avoidance of doubt, ARM makes no representation with respect to, and has undertaken no analysis to identify or understand the scope and content of, third party patents, copyrights, trade secrets, or other rights.

This document may include technical inaccuracies or typographical errors.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL ARM BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF ARM HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This document consists solely of commercial items. You shall be responsible for ensuring that any use, duplication or disclosure of this document complies fully with any relevant export laws and regulations to assure that this document or any portion thereof is not exported, directly or indirectly, in violation of such export laws. Use of the word "partner" in reference to ARM's customers is not intended to create or refer to any partnership relationship with any other company. ARM may make changes to this document at any time and without notice.

If any of the provisions contained in these terms conflict with any of the provisions of any signed written agreement covering this document with ARM, then the signed written agreement prevails over and supersedes the conflicting provisions of these terms. This document may be translated into other languages for convenience, and you agree that if there is any conflict between the English version of this document and any translation, the terms of the English version of the Agreement shall prevail.

Words and logos marked with ® or TM are registered trademarks or trademarks of ARM Limited or its affiliates in the EU and/or elsewhere. All rights reserved. Other brands and names mentioned in this document may be the trademarks of their respective owners. Please follow ARM's trademark usage guidelines at http://www.arm.com/about/trademark-usage-guidelines.php

Copyright © [2014, 2015], ARM Limited or its affiliates. All rights reserved.

ARM Limited. Company 02557590 registered in England.

110 Fulbourn Road, Cambridge, England CB1 9NJ.

LES-PRE-20349

Additional Notices

Some material in this document is based on IEEE 754-1985 IEEE Standard for Binary Floating-Point Arithmetic. The IEEE disclaims any responsibility or liability resulting from the placement and use in the described manner.

Confidentiality Status

This document is Non-Confidential. The right to use, copy and disclose this document may be subject to license restrictions in accordance with the terms of the agreement entered into by ARM and the party that ARM delivered this document to.

Unrestricted Access is an ARM internal classification.

Product Status

The information in this document is Final, that is for a developed product.

Web Address

http://www.arm.com

Contents

ARM® Compiler ARM C and C++ Libraries and Floating-Point Support User Guide

	Preta	ace	
		About this book	12
Chapter 1	The A	ARM C and C++ Libraries	
	1.1	Mandatory linkage with the C library	1-16
	1.2	C and C++ runtime libraries	1-17
	1.3	C and C++ library features	1-21
	1.4	C++ and C libraries and the std namespace	1-22
	1.5	Multithreaded support in ARM C libraries	1-23
	1.6	Support for building an application with the C library	1-32
	1.7	Support for building an application without the C library	1-38
	1.8	Tailoring the C library to a new execution environment	1-45
	1.9	Assembler macros that tailor locale functions in the C library	1-49
	1.10	Modification of C library functions for error signaling, error handling, and pro	gram exit
			1-58
	1.11	Stack and heap memory allocation and the ARM C and C++ libraries	1-59
	1.12	Tailoring input/output functions in the C and C++ libraries	1-66
	1.13	Target dependencies on low-level functions in the C and C++ libraries	1-67
	1.14	The C library printf family of functions	1-69
	1.15	The C library scanf family of functions	1-70
	1.16	Redefining low-level library functions to enable direct use of high-level library	y functions
		in the C library	1-71

	1.17	The C library functions fread(), fgets() and gets()	1-73
	1.18	Re-implementingbackspace() in the C library	
	1.19	Re-implementingbackspacewc() in the C library	
	1.20	Redefining target-dependent system I/O functions in the C library	
	1.21	Tailoring non-input/output C library functions	
	1.22	Real-time integer division in the ARM libraries	1-79
	1.23	ISO C library implementation definition	
	1.24	C library functions and extensions	
	1.25	C and C++ library naming conventions	
	1.26	Using macroARM_WCHAR_NO_IO to disable FILE declaration and wide I/O	
		function prototypes	
Chapter 2	The	ARM C Micro-library	
	2.1	About microlib	2-92
	2.2	Differences between microlib and the default C library	2-93
	2.3	Library heap usage requirements of microlib	
	2.4	ISO C features missing from microlib	
	2.5	Building an application with microlib	
	2.6	Configuring the stack and heap for use with microlib	
	2.7	Entering and exiting programs linked with microlib	
	2.8	Tailoring the microlib input/output functions	
Chapter 3	Floa	ting-point Support	
Onapter o	3.1	About floating-point support	2 102
	3.1	Controlling the ARM floating-point environment	
	3.3	Using C99 signaling NaNs provided by mathlib (_WANT_SNAN)	
	3.4 3.5	mathlib double and single-precision floating-point functions IEEE 754 arithmetic	
			0 110
Chapter 4		C and C++ Library Functions reference	
	4.1	aeabi_errno_addr()	
	4.2	alloca()	4-130
	4.3	clock()	4-131
	4.4	_clock_init()	
	4.5	default_signal_handler()	
	4.6	errno	
	4.7	_findlocale()	4-135
	4.8	_fisatty()	4-136
	4.9	_get_lconv()	4-137
	4.10	getenv()	. 4-138
	4.11	_getenv_init()	4-139
	4.12	heapstats()	4-140
	4.13	heapvalid()	4-141
	4.14	Iconv structure	4-142
	4.15	localeconv()	. 4-144
	4.16	_membitcpybl(), _membitcpybb(), _membitcpyhl(), _membitcpyhb(), _membitcp	ywl(),
		_membitcpywb(), _membitmovebl(), _membitmovebb(), _membitmovehl(),	
		_membitmovehb(), _membitmovewl(), _membitmovewb()	4-145
	4.17	posix_memalign()	4-146
	4.18	raise()	4-147

	4.19	_rand_r()	4-148
	4.20	remove()	4-149
	4.21	rename()	4-150
	4.22	rt_entry	4-151
	4.23	rt_exit()	4-152
	4.24	rt_fp_status_addr()	4-153
	4.25	rt_heap_extend()	4-154
	4.26	rt_lib_init()	4-155
	4.27	rt_lib_shutdown()	4-156
	4.28	rt_raise()	4-157
	4.29	rt_stackheap_init()	4-158
	4.30	setlocale()	4-159
	4.31	_srand_r()	4-161
	4.32	strcasecmp()	4-162
	4.33	strncasecmp()	4-163
	4.34	strlcat()	4-164
	4.35	strlcpy()	4-165
	4.36	_sys_close()	4-166
	4.37	_sys_command_string()	4-167
	4.38	_sys_ensure()	4-168
	4.39	_sys_exit()	4-169
	4.40	_sys_flen()	4-170
	4.41	_sys_istty()	4-171
	4.42	_sys_open()	4-172
	4.43	_sys_read()	4-173
	4.44	_sys_seek()	4-174
	4.45	_sys_tmpnam()	4-175
	4.46	_sys_write()	4-176
	4.47	system()	4-177
	4.48	time()	4-178
	4.49	_ttywrch()	4-179
	4.50	user_heap_extend()	4-180
	4.51	user_heap_extent()	4-181
	4.52	user_setup_stackheap()	4-182
	4.53	vectab_stack_and_reset	4-183
	4.54	wcscasecmp()	4-184
	4.55	wcsncasecmp()	4-185
	4.56	wcstombs()	4-186
	4.57	Thread-safe C library functions	4-187
	4.58	C library functions that are not thread-safe	4-189
Chapter 5	Floa	ting-point Support Functions Reference	
	5.1	_clearfp()	5-192
	5.2	_controlfp()	5-193
	5.3	fp_status()	5-195
	5.4	gamma(), gamma_r()	5-197
	5.5	ieee_status()	5-198
	5.6	j0(), j1(), jn(), Bessel functions of the first kind	
	5.7	significand(), fractional part of a number	5-202
	5.8	_statusfp()	5-203

5.9	y0(), y1(), yn(),	Bessel functions of the second kind	5-204
-----	-------------------	-------------------------------------	-------

List of Figures ARM® Compiler ARM C and C++ Libraries and Floating-Point Support User Guide

Figure 3-1	IEEE 754 single-precision floating-point format	3-118
Figure 3-2	IEEE 754 double-precision floating-point format	3-119
Figure 5-1	Floating-point status word layout	5-195
Figure 5-2	IEEE status word layout	5-198

List of Tables

ARM® Compiler ARM C and C++ Libraries and Floating-Point Support User Guide

lable 1-1	C library callouts	1-25
Table 1-2	Direct semihosting dependencies	1-34
Table 1-3	Indirect semihosting dependencies	1-36
Table 1-4	Published API definitions	1-36
Table 1-5	Standalone C library functions	1-38
Table 1-6	Default ISO8859-1 locales	1-49
Table 1-7	Default Shift-JIS and UTF-8 locales	1-50
Table 1-8	Trap and error handling	1-58
Table 1-9	Input/output dependencies	1-67
Table 1-10	Signals supported by the signal() function	1-81
Table 1-11	perror() messages	1-83
Table 1-12	Standard C++ library differences	1-85
Table 1-13	C library extensions	1-86
Table 3-1	FE_EX_INTYPE_MASK operand type flags	3-111
Table 3-2	FE_EX_OUTTYPE_MASK operand type flags	3-111
Table 3-3	FE_EX_FN_MASK operation type flags	3-112
Table 3-4	FE_EX_CMPRET_MASK comparison type flags	3-112
Table 3-5	Sample single-precision floating-point values	3-120
Table 3-6	Sample double-precision floating-point values	3-121
Table 4-1	Functions that are thread-safe	4-187
Table 4-2	Functions that are not thread-safe	4-189
Table 5-1	_controlfp argument macros	5-193

Table 5-2	Status word bit modification	5-198
Table 5-3	Rounding mode control	5-199

Preface

This preface introduces the ARM® Compiler ARM C and C++ Libraries and Floating-Point Support User Guide.

It contains the following:

• About this book on page 12.

About this book

ARM® Compiler ARM C and C++ Libraries and Floating-Point Support User Guide. This manual provides user information for the ARM libraries and floating-point support. It is also available as a PDF.

Using this book

This book is organized into the following chapters:

Chapter 1 The ARM C and C++ Libraries

Describes the ARM® C and C++ libraries.

Chapter 2 The ARM C Micro-library

Describes microlib, the C micro-library.

Chapter 3 Floating-point Support

Describes ARM support for floating-point computations.

Chapter 4 The C and C++ Library Functions reference

Describes the standard C and C++ library functions that are extensions to the C Standard or that differ in some way to the standard.

Chapter 5 Floating-point Support Functions Reference

Describes ARM support for floating-point functions.

Glossary

The ARM Glossary is a list of terms used in ARM documentation, together with definitions for those terms. The ARM Glossary does not contain terms that are industry standard unless the ARM meaning differs from the generally accepted meaning.

See the ARM Glossary for more information.

Typographic conventions

italic

Introduces special terminology, denotes cross-references, and citations.

bold

Highlights interface elements, such as menu names. Denotes signal names. Also used for terms in descriptive lists, where appropriate.

monospace

Denotes text that you can enter at the keyboard, such as commands, file and program names, and source code.

<u>mono</u>space

Denotes a permitted abbreviation for a command or option. You can enter the underlined text instead of the full command or option name.

monospace italic

Denotes arguments to monospace text where the argument is to be replaced by a specific value.

monospace bold

Denotes language keywords when used outside example code.

<and>

Encloses replaceable terms for assembler syntax where they appear in code or code fragments. For example:

SMALL CAPITALS

Used in body text for a few terms that have specific technical meanings, that are defined in the *ARM glossary*. For example, IMPLEMENTATION DEFINED, IMPLEMENTATION SPECIFIC, UNKNOWN, and UNPREDICTABLE.

Feedback

Feedback on this product

If you have any comments or suggestions about this product, contact your supplier and give:

- The product name.
- The product revision or version.
- An explanation with as much information as you can provide. Include symptoms and diagnostic procedures if appropriate.

Feedback on content

If you have comments on content then send an e-mail to errata@arm.com. Give:

ARM also welcomes general suggestions for additions and improvements.

- The title.
- The number ARM DUI0808C.
- The page number(s) to which your comments refer.
- A concise explanation of your comments.

Note
ARM tests the PDF only in Adobe Acrobat and Acrobat Reader, and cannot guarantee the quality of the
represented document when used with any other PDF reader.

Other information

- ARM Information Center.
- ARM Technical Support Knowledge Articles.
- Support and Maintenance.
- ARM Glossary.

Chapter 1 The ARM C and C++ Libraries

Describes the ARM® C and C++ libraries.

It contains the following sections:

- 1.1 Mandatory linkage with the C library on page 1-16.
- 1.2 C and C++ runtime libraries on page 1-17.
- 1.3 C and C++ library features on page 1-21.
- 1.4 C++ and C libraries and the std namespace on page 1-22.
- 1.5 Multithreaded support in ARM C libraries on page 1-23.
- 1.6 Support for building an application with the C library on page 1-32.
- 1.7 Support for building an application without the C library on page 1-38.
- 1.8 Tailoring the C library to a new execution environment on page 1-45.
- 1.9 Assembler macros that tailor locale functions in the C library on page 1-49.
- 1.10 Modification of C library functions for error signaling, error handling, and program exit on page 1-58.
- 1.11 Stack and heap memory allocation and the ARM C and C++ libraries on page 1-59.
- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.
- 1.14 The C library printf family of functions on page 1-69.
- 1.15 The C library scanf family of functions on page 1-70.
- 1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.
- 1.17 The C library functions fread(), fgets() and gets() on page 1-73.
- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.
- 1.21 Tailoring non-input/output C library functions on page 1-78.

- 1.22 Real-time integer division in the ARM libraries on page 1-79.
- 1.23 ISO C library implementation definition on page 1-80.
- 1.24 C library functions and extensions on page 1-86.
- 1.25 C and C++ library naming conventions on page 1-87.
- 1.26 Using macro__ARM_WCHAR_NO_IO to disable FILE declaration and wide I/O function prototypes on page 1-90.

1.1 Mandatory linkage with the C library

If you write an application in C, you must link it with the C library, even if it makes no direct use of C library functions.

This is because the compiler might implicitly generate calls to C library functions to improve your application, even though calls to such functions might not exist in your source code.

Even if your application does not have a main() function, meaning that the C library is not initialized, some C library functions are still legitimately available and the compiler might implicitly generate calls to these functions.

Related concepts

1.2.1 Summary of the C and C++ runtime libraries on page 1-17.
1.6.4 Using the libraries in a nonsemihosting environment on page 1-33.

Related references

1.7.1 Building an application without the C library on page 1-38.

1.2 C and C++ runtime libraries

ARM provides the C standardlib, C microlib, and C++ runtime libraries to support compiled C and C++.

This section contains the following subsections:

- 1.2.1 Summary of the C and C++ runtime libraries on page 1-17.
- 1.2.2 Compliance with the Application Binary Interface (ABI) for the ARM architecture on page 1-18.
- 1.2.3 Increasing portability of object files to other CLIBABI implementations on page 1-18.
- 1.2.4 ARM C and C++ library directory structure on page 1-19.
- 1.2.5 Selection of ARM C and C++ library variants based on build options on page 1-19.
- 1.2.6 T32 C libraries on page 1-20.

1.2.1 Summary of the C and C++ runtime libraries

A summary of the C and C++ runtime libraries provided by ARM.

C standardlib

This is a C library consisting of:

- All functions defined by the ISO C99 library standard.
- Target-dependent functions that implement the C library functions in the semihosted execution environment. You can redefine these functions in your own application.
- Functions called implicitly by the compiler.
- ARM extensions that are not defined by the ISO C library standard, but are included in the library.

C microlib

This is a C library that can be used as an alternative to C standardlib. It is a micro-library that is ideally suited for deeply embedded applications that have to fit within small-sized memory. The C micro-library, microlib, consists of:

- Functions that are highly optimized to achieve the minimum code size.
- Functions that are not compliant with the ISO C library standard.
- Functions that are not compliant with the 1985 IEEE 754 standard for binary floating-point arithmetic.

C++

This is a C++ library that can be used with C standardlib. It consists of:

- Functions defined by the ISO C++ library standard.
- The libc++ library.
- The Rogue Wave Standard C++ library.

The C++ libraries depend on the C library for target-specific support. There are no target dependencies in the C++ libraries.

Related concepts

1.1 Mandatory linkage with the C library on page 1-16.

Related references

1.7.1 Building an application without the C library on page 1-38.

Chapter 1 The ARM C and C++ Libraries on page 1-14.

Chapter 2 The ARM C Micro-library on page 2-91.

1.23.5 Standard C++ library implementation definition on page 1-84.

Related information

ISO C library standard.

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

Rogue Wave Standard C++ Library Documentation.

1.2.2 Compliance with the Application Binary Interface (ABI) for the ARM architecture

The ABI for the ARM Architecture is a family of specifications that describes the processor-specific aspects of the translation of a source program into object files.

Object files produced by any toolchain that conforms to the relevant aspects of the ABI can be linked together to produce a final executable image or library.

Each document in the specification covers a specific area of compatibility. For example, the *C Library ABI for the ARM® Architecture* (CLIBABI) describes the parts of the C library that are expected to be common to all conforming implementations.

The ABI documents contain several areas that are marked as *platform specific*. To define a complete execution environment these platform-specific details have to be provided. This gives rise to a number of supplemental specifications, for example the *ARM GNU/Linux ABI supplement*.

The Base Standard ABI for the ARM® Architecture (BSABI) enables you to use A32 and T32 objects and libraries from different producers that support the ABI for the ARM Architecture. The ARM compilation tools fully support the BSABI, including support for Debug With Arbitrary Record Format (DWARF) 3 debug tables (DWARF Debugging Standard Version 3).

The ARM C and C++ libraries conform to the standards described in the BSABI and the CLIBABI. The libc++ library conforms to the C++ ABI for the ARM architecture (CPPABI), with the exception of Array Construction and Delete helper functions.

Related tasks

1.2.3 Increasing portability of object files to other CLIBABI implementations on page 1-18.

Related references

1.23.5 Standard C++ library implementation definition on page 1-84.

Related information

Application Binary Interface (ABI) for the ARM Architecture. DWARF Debugging Standard.

1.2.3 Increasing portability of object files to other CLIBABI implementations

You can request full CLIBABI portability to increase the portability of your object files to othe implementations of the CLIBABI.	er
Note	
This reduces the performance of some library operations.	

There are a number of methods you can use to request full CLIBABI portability.

Procedure

- Specify #define _AEABI_PORTABILITY_LEVEL 1 before you #include any library headers, such as <stdlib.h>.
- Specify -D_AEABI_PORTABILITY_LEVEL=1 on the compiler command line.

Related concepts

1.2.2 Compliance with the Application Binary Interface (ABI) for the ARM architecture on page 1-18.

Related references

1.23.5 Standard C++ library implementation definition on page 1-84.

Related information

Application Binary Interface (ABI) for the ARM Architecture.

DWARF Debugging Standard. Application Binary Interface (ABI) for the ARM Architecture.

1.2.4 ARM C and C++ library directory structure

The libraries are installed in the armlib, cpplib, and libcxx subdirectories within <code>install_directory</code> \lib.

armlib

Contains the variants of the ARM C library, the floating-point arithmetic library (fplib), and the math library (mathlib).

libcxx

Contains all libc++ and libc++abi libraries.

cpplib

Contains the variants of the Rogue Wave C++ library (cpp_*) and supporting ARM C++ functions (cpprt_*), referred to collectively as the ARM C++ Libraries.

The accompanying header files for these libraries are installed in:

install directory\include

To specify an alternative top-level lib directory, set either one of the environment variables ARMCOMPILER6LIB or ARMLIB, to point to the new directory, or use the --libpath option. To select between the C++ libraries, libcxx or cpplib, use the --stdlib option.

You must not identify the armlib, cpplib and libcxx directories separately because this directory structure might change in future releases. The linker finds them from the location of lib.

Note

- The ARM C libraries are supplied in binary form only.
- The ARM libraries must not be modified. If you want to create a new implementation of a library function, place the new function in an object file, or your own library, and include it when you link the application. Your version of the function is used instead of the standard library version.
- Normally, only a few functions in the ISO C library require re-implementation to create a target-dependent application.
- The Libc++ and Libc++abi libraries provided with ARM Compiler 6 are based on the open source libc++ and libc++abii libraries. The modifications made by ARM are covered by restrictions described in the end user license agreement.

1.2.5 Selection of ARM C and C++ library variants based on build options

When you build your application, you must make certain choices such as the target architecture, instruction set, and byte order. You communicate these choices to the compiler using build options. The linker then selects appropriate C and C++ library variants compatible with these build options.

Choices that influence the ARM C and C++ library variant include the following:

Target Architecture and instruction set	
A32 or T32 (AArch32 state instruction sets)	١.
Note	
Microlib is not supported for AArch64 state	

Byte order

Big-endian or little-endian.

Floating-point support

- Software (SoftVFP).
- · Hardware (VFP).
- Software or hardware with half-precision or double-precision extensions.
- No floating-point support.

 Note	

In ARMv8, VFP hardware is integral to the architecture. Software floating-point is supported for AArch32 state, but is not supported for AArch64 state.

Position independence

A bare-metal Position Independent Executable (PIE) is an executable that does not need to be executed at a specific address but can be executed at any suitably aligned address.

Position independent code uses PC-relative addressing modes where possible and otherwise accesses global data via the Global Offset Table (GOT).

Position-independent C++ code can be achieved with -fbare-metal-pie.



Position independence is supported only in AArch32 state, and is not supported in microlib.

When you link your assembler code, C or C++ code, the linker selects appropriate C and C++ library variants compatible with the build options you specified. There is a variant of the ISO C library for each combination of major build options.

Related information

- -marm compiler option.
- -mbig-endian compiler option.
- -mfpu compiler option.
- -mlittle-endian compiler option.
- -mthumb compiler option.
- --arm assembler option.
- --bigend assembler option.
- --fpu assembler option.
- --littleend assembler option.
- --thumb assembler option.

1.2.6 T32 C libraries

There are several variations of the T32 libraries. It depends on the architecture target or processor as to which one is used.

When compiling for ARMv7A or ARMv7R, there are two libraries available. The default is a T32 library using Thumb-2 technology. It contains a small number of A32 instructions that are used to significantly improve performance. This default library corresponds to the --thumb2_library linker option. The alternative is an A32/T32 library that contains a small amount of Thumb-2 code, and is selected with the --no_thumb2_library linker option.

ARMv7M and ARMv7E-M have their own T32 library that uses Thumb-2 technology.

ARMv6M has its own dedicated T32-only library.

Related information

--thumb2_library, --no_thumb2_library.

1.3 C and C++ library features

The C library uses the standard ARM semihosted environment to provide facilities such as file input/output. This environment is supported by the ARM DSTREAM debug and trace unit, the ARM RVI debug unit, and the *Fixed Virtual Platform* (FVP) models.

You can re-implement any of the target-dependent functions of the C library as part of your application. This enables you to tailor the C library and, therefore, the C++ library, to your own execution environment.

You can also tailor many of the target-independent functions to your own application-specific requirements. For example:

- The malloc family.
- · The ctype family.
- All the locale-specific functions.

Many of the C library functions are independent of any other function and contain no target dependencies. You can easily exploit these functions from assembler code.

Functions in the C library are responsible for:

- Creating an environment in which a C or C++ program can execute. This includes:
 - Creating a stack.
 - Creating a heap, if required.
 - Initializing the parts of the library the program uses.
- Starting execution by calling main().
- Supporting use of ISO-defined functions by the program.
- · Catching runtime errors and signals and, if required, terminating execution on error or program exit.

1.4 C++ and C libraries and the std namespace

All C++ standard library names, including the C library names, if you include them, are defined in the namespace std.

Standard library names are defined using the following C++ syntax:

```
#include <cstdlib> // instead of stdlib.h
```

This means that you must qualify all the library names using one of the following methods:

• Specify the standard namespace, for example:

```
std::printf("example\n");
```

• Use the C++ keyword **using** to import a name to the global namespace:

```
using namespace std;
printf("example\n");
```

_____ Note _____

errno is a macro, so it is not necessary to qualify it with a namespace.

1.5 Multithreaded support in ARM C libraries

Describes the features that are supported by the ARM C libraries for creating multithreaded applications.

This section contains the following subsections:

- 1.5.1 ARM C libraries and multithreading on page 1-23.
- 1.5.2 ARM C libraries and reentrant functions on page 1-23.
- 1.5.3 ARM C libraries and thread-safe functions on page 1-24.
- 1.5.4 Use of static data in the C libraries on page 1-24.
- 1.5.5 Use of the user libspace static data area by the C libraries on page 1-25.
- 1.5.6 C library functions to access subsections of the __user_libspace static data area on page 1-26.
- 1.5.7 Re-implementation of legacy function __user_libspace() in the C library on page 1-26.
- 1.5.8 Management of locks in multithreaded applications on page 1-26.
- 1.5.9 How to ensure re-implemented mutex functions are called on page 1-28.
- 1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.
- 1.5.11 Thread safety in the ARM C library on page 1-30.
- 1.5.12 Thread safety in the ARM C++ library on page 1-30.
- 1.5.13 The floating-point status word in a multithreaded environment on page 1-30.

1.5.1 ARM C libraries and multithreading

The ARM C libraries support multithreading, for example, where you are using a *Real-Time Operating System* (RTOS).

In this context, the following definitions are used:

Threads

Mean multiple streams of execution sharing global data between them.

Process

Means a collection of all the threads that share a particular set of global data.

If there are multiple processes on a machine, they can be entirely separate and do not share any data (except under unusual circumstances). Each process might be a single-threaded process or might be divided into multiple threads.

Where you have single-threaded processes, there is only one flow of control. In multithreaded applications, however, several flows of control might try to access the same functions, and the same resources, concurrently. To protect the integrity of resources, any code you write for multithreaded applications must be *reentrant* and *thread-safe*.

Reentrancy and thread safety are both related to the way functions in a multithreaded application handle resources.

Related concepts

1.5.2 ARM C libraries and reentrant functions on page 1-23.


1.5.3 ARM C libraries and thread-safe functions on page 1-24.

Related references

1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.

1.5.2 ARM C libraries and reentrant functions

A reentrant function does not hold static data over successive calls, and does not return a pointer to static data.



	Note	_		
A ree	entrant function	must not call	non-reentrant	functions

Related concepts

1.5.3 ARM C libraries and thread-safe functions on page 1-24. 1.5.1 ARM C libraries and multithreading on page 1-23.

1.5.3 ARM C libraries and thread-safe functions

A thread-safe function protects shared resources from concurrent access using *locks*.

Thread safety concerns only how a function is implemented and not its external interface. In C, local variables are held in processor registers, or if the compiler runs out of registers, are dynamically allocated on the stack. Therefore, any function that does not use static data, or other shared resources, is thread-safe.

Related concepts

1.5.2 ARM C libraries and reentrant functions on page 1-23.

1.5.1 ARM C libraries and multithreading on page 1-23.

1.5.11 Thread safety in the ARM C library on page 1-30.

1.5.12 Thread safety in the ARM C++ library on page 1-30.

Related references

1.5.8 Management of locks in multithreaded applications on page 1-26.

1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.

1.5.4 Use of static data in the C libraries

Static data refers to persistent read/write data that is not stored on the stack or the heap. Callouts from the C library enable access to static data.

Static data can be external or internal in scope, and is at a fixed address relative to the program counter (pc), when compiled with -fbare-metal-pie.

The following describes how the C libraries use static data:

- The default floating-point arithmetic libraries fz_* and fj_* do not use static data and are always reentrant. For software floating-point, the f_* and g_* libraries use static data to store the Floating-Point (FP) status word. For hardware floating-point, the f_* and g_* libraries do not use static data.
- All statically-initialized data in the C libraries is read-only.
- All writable static data is zero-initialized.

Note				
Exactly which functions use s	static data in their	definitions might	change in future	releases

Callouts from the C library enable access to static data. C library functions that use static data can be categorized as:

- Functions that do not use any static data of any kind, for example fprintf().
- Functions that manage a static state, such as malloc(), rand(), and strtok().
- Functions that do not manage a static state, but use static data in a way that is specific to the implementation in ARM Compiler, for example isalpha().

When the C library does something that requires implicit static data, it uses a callout to a function you can replace. These functions are shown in the following table. They do not use semihosting.

Table 1-1 C library callouts

Function	Description
rt_errno_addr()	Called to get the address of the variable errno
rt_fp_status_addr()	Called by the floating-point support code to get the address of the floating-point status word
locale functions	The functionuser_libspace() creates a block of private static data for the library

The default implementation of __user_libspace creates a 96-byte block in the ZI region. Even if your application does not have a main() function, the __user_libspace() function does not normally have to be redefined.

_____ Note _____

Exactly which functions use static data in their definitions might change in future releases.

Related concepts

1.5.7 Re-implementation of legacy function user libspace() in the C library on page 1-26.

1.9 Assembler macros that tailor locale functions in the C library on page 1-49.

1.5.1 ARM C libraries and multithreading on page 1-23.

Related references

4.24 rt fp status addr() on page 4-153.

1.5.5 Use of the user libspace static data area by the C libraries

The __user_libspace static data area holds the static data for the C libraries. The C libraries use the __user_libspace area to store a number of different types of data.

This is a block of 96 bytes of zero-initialized data, supplied by the C library. It is also used as a temporary stack during C library initialization.

The default ARM C libraries use the user libspace area to hold:

- errno, used by any function that is capable of setting errno. By default, __rt_errno_addr() returns a pointer to errno.
- The Floating-Point (FP) status word for software floating-point (exception flags, rounding mode). It
 is unused in hardware floating-point. By default, __rt_fp_status_addr() returns a pointer to the FP
 status word
- A pointer to the base of the heap (that is, the __Heap_Descriptor), used by all the malloc-related functions.
- The current locale settings, used by functions such as setlocale(), but also used by all other library
 functions that depend on them. For example, the ctype.h functions have to access the LC_CTYPE
 setting.

How the C and C++ libraries use the $_$ user $_$ libspace area might change in future releases.

Related concepts

1.5.6 C library functions to access subsections of the user libspace static data area on page 1-26.

Related information

_aeabi_atexit() in C++ ABI for the ARM Architecture.

1.5.6 C library functions to access subsections of the __user_libspace static data area

The __user_perproc_libspace() and __user_perthread_libspace() functions return subsections of the __user_libspace static data area.

```
__user_perproc_libspace()
```

Returns a pointer to memory for storing data that is global to an entire process. This data is shared between all threads.

In AArch32 state, returns a pointer to 96 bytes of 4-byte aligned memory.

In AArch64 state, returns a pointer to 192 bytes of 8-byte aligned memory.

```
user perthread libspace()
```

Returns a pointer to memory for storing data that is local to a particular thread. This means that __user_perthread_libspace() returns a different address depending on the thread it is called from

In AArch32 state, returns a pointer to 96 bytes of 4-byte aligned memory.

In AArch64 state, returns a pointer to 192 bytes of 8-byte aligned memory.

Related concepts

1.5.7 Re-implementation of legacy function user libspace() in the C library on page 1-26.

Related references

1.5.5 Use of the user libspace static data area by the C libraries on page 1-25.

1.5.7 Re-implementation of legacy function __user_libspace() in the C library

The __user_libspace() function returns a pointer to a block of private static data for the C library. This function does not normally have to be redefined.

If you are writing an operating system or a process switcher, then typically you use the __user_perproc_libspace() and __user_perthread_libspace() functions (which are always available) rather than re-implement __user_libspace().

If you have legacy source code that re-implements __user_libspace(), you do not have to change the re-implementation for single-threaded processes. However, you are likely to be required to do so for multi-threaded applications. For multi-threaded applications, use either or both of user perproc libspace() and user perthread libspace(), instead of user libspace().

Related concepts

1.5.6 C library functions to access subsections of the __user_libspace static data area on page 1-26. 1.5.4 Use of static data in the C libraries on page 1-24.

Related references

1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.
1.5.5 Use of the user libspace static data area by the C libraries on page 1-25.

1.5.8 Management of locks in multithreaded applications

A thread-safe function protects shared resources from concurrent access using locks. There are functions in the C library that you can re-implement, that enable you to manage the locking mechanisms and so prevent the corruption of shared data such as the heap.

These functions are mutex functions, where the lifecycle of a mutex is one of initialization, iterative acquisition and releasing of the mutex as required, and then optionally freeing the mutex when it is never going to be required again. The mutex functions wrap onto your own *Real-Time Operating System* (RTOS) calls, and their function prototypes are:

```
_mutex_initialize()
    int mutex initialize(mutex *m);
```

This function accepts a pointer to a 32-bit word and initializes it as a valid mutex.

By default, _mutex_initialize() returns zero for a nonthreaded application. Therefore, in a multithreaded application, _mutex_initialize() must return a nonzero value on success so that at runtime, the library knows that it is being used in a multithreaded environment.

Ensure that mutex initialize() initializes the mutex to an unlocked state.

This function must be supplied if you are using mutexes.

```
_mutex_acquire()
     void mutex acquire(mutex *m);
```

This function causes the calling thread to obtain a lock on the supplied mutex.

_mutex_acquire() returns immediately if the mutex has no owner. If the mutex is owned by another thread, _mutex_acquire() must block until it becomes available.

_mutex_acquire() is not called by the thread that already owns the mutex.

This function must be supplied if you are using mutexes.

```
_mutex_release()
     void mutex release(mutex *m);
```

This function causes the calling thread to release the lock on a mutex acquired by _mutex_acquire().

The mutex remains in existence, and can be re-locked by a subsequent call to mutex_acquire().

_mutex_release() assumes that the mutex is owned by the calling thread.

This function must be supplied if you are using mutexes.

```
_mutex_free()
     void mutex free(mutex *m);
```

This function causes the calling thread to free the supplied mutex. Any operating system resources associated with the mutex are freed. The mutex is destroyed and cannot be reused.

mutex free() assumes that the mutex is owned by the calling thread.

This function is optional. If you do not supply this function, the C library does not attempt to call it.

The mutex data structure type that is used as the parameter to the _mutex_*() functions is not defined in any of the ARM Compiler toolchain header files, but must be defined elsewhere. Typically, it is defined as part of RTOS code.

Functions that call _mutex_*() functions create 4 bytes of memory for holding the mutex data structure. Heap Initialize() is one such function.

For the C library, a mutex is specified as a single 32-bit word of memory that can be placed anywhere. However, if your mutex implementation requires more space than this, or demands that the mutex be in a special memory area, then you must treat the default mutex as a pointer to a real mutex.

A typical example of a re-implementation framework for _mutex_initialize(), _mutex_acquire(), and _mutex_release() is as follows, where SEMAPHORE_ID, CreateLock(), AcquireLock(), and ReleaseLock() are defined in the RTOS, and (...) implies additional parameters:

```
int _mutex_initialize(SEMAPHORE_ID *sid)
{
    /* Create a mutex semaphore */
    *sid = CreateLock(...);
    return 1;
```

```
}
void _mutex_acquire(SEMAPHORE_ID *sid)
{
    /* Task sleep until get semaphore */
    AcquireLock(*sid, ...);
}
void _mutex_release(SEMAPHORE_ID *sid)
{
    /* Release the semaphore. */
    ReleaseLock(*sid);
}
void _mutex_free(SEMAPHORE_ID *sid)
{
    /* Free the semaphore. */
    FreeLock(*sid, ...);
}
```

- Note -

- _mutex_release() releases the lock on the mutex that was acquired by _mutex_acquire(), but the mutex still exists, and can be re-locked by a subsequent call to _mutex_acquire().
- It is only when the optional wrapper function _mutex_free() is called that the mutex is destroyed. After the mutex is destroyed, it cannot be used without first calling _mutex_initialize() to set it up again.

Related concepts

1.5.9 How to ensure re-implemented mutex functions are called on page 1-28.

1.5.11 Thread safety in the ARM C library on page 1-30.

1.5.12 Thread safety in the ARM C++ library on page 1-30.

Related references

1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.

1.5.9 How to ensure re-implemented mutex functions are called

If your re-implemented _mutex_*() functions are within an object that is contained within a library file, the linker does not automatically include the object.

This can result in the mutex *() functions being excluded from the image you have built.

To ensure that your _mutex_*() functions are called, you can either:

- Place your mutex functions in a non-library object file. This helps to ensure that they are resolved at link time.
- Place your mutex functions in a library object file, and arrange a non-weak reference to something in the object.
- Place your mutex functions in a library object file, and have the linker explicitly extract the specific object from the library on the command line by writing *libraryname.a(objectfilename.o)* when you invoke the linker.

Related concepts

1.5.11 Thread safety in the ARM C library on page 1-30.

1.5.12 Thread safety in the ARM C++ library on page 1-30.

Related references

1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.

1.5.8 Management of locks in multithreaded applications on page 1-26.

1.5.10 Using the ARM C library in a multithreaded environment

There are a number of requirements you must fulfill before you can use the ARM C library in a multithreaded environment.

To use the ARM C library in a multithreaded environment, you must provide:

- An implementation of __user_perthread_libspace() that returns a different block of memory for each thread. This can be achieved by either:
 - Returning a different address depending on the thread it is called from.
 - Having a single __user_perthread_libspace block at a fixed address and swapping its contents when switching threads.

You can use either approach to suit your environment.

You do not have to re-implement __user_perproc_libspace() unless there is a specific reason to do so. In the majority of cases, there is no requirement to re-implement this function.

A way to manage multiple stacks.

A simple way to do this is to use the ARM two-region memory model. Using this means that you keep the stack that belongs to the primary thread entirely separate from the heap. Then you must allocate more memory for additional stacks from the heap itself.

The ARM C libraries supply no thread-switching mechanisms of their own. This is because there are many different ways to do this and the libraries are designed to work with all of them.

You only have to provide implementations of the mutex functions if you require them to be called.

In some applications, the mutex functions might not be useful. For example, a co-operatively threaded program does not have to take steps to ensure data integrity, provided it avoids calling its yield function during a critical section. However, in other types of application, for example where you are implementing preemptive scheduling, or in a *Symmetric Multi-Processor* (SMP) model, these functions play an important part in handling locks.

If all of these requirements are met, you can use the ARM C library in your multithreaded environment. The following behavior applies:

- Some functions work independently in each thread.
- Some functions automatically use the mutex functions to mediate multiple accesses to a shared resource
- Some functions are still nonreentrant so a reentrant equivalent is supplied.
- A few functions remain nonreentrant and no alternative is available.

Related concepts

1.5.1 ARM C libraries and multithreading on page 1-23.

1.5.9 How to ensure re-implemented mutex functions are called on page 1-28.

1.5.11 Thread safety in the ARM C library on page 1-30.

1.5.12 Thread safety in the ARM C++ library on page 1-30.

Related references

1.5.8 Management of locks in multithreaded applications on page 1-26.

4.57 Thread-safe C library functions on page 4-187.

4.58 C library functions that are not thread-safe on page 4-189.

1.5.11 Thread safety in the ARM C library

ARM C library functions are either always thread-safe, never thread-safe, or thread-safe in certain circumstances.

In the ARM C library:

- Some functions are never thread-safe, for example setlocale().
- Some functions are inherently thread-safe, for example memcpy().
- Some functions, such as malloc(), can be made thread-safe by implementing the _mutex_* functions.
- Other functions are only thread-safe if you pass the appropriate arguments, for example tmpnam().

Threading problems might occur when your application makes use of the ARM C library in a way that is hidden, for example, if the compiler implicitly calls functions that you have not explicitly called in your source code. Familiarity with the thread-safe C library functions and C library functions that are not thread-safe can help you to avoid this type of threading problem, although in general, it is unlikely to arise.

Related concepts

1.5.9 How to ensure re-implemented mutex functions are called on page 1-28.

1.5.12 Thread safety in the ARM C++ library on page 1-30.

Related references

- 1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.
- 1.5.8 Management of locks in multithreaded applications on page 1-26.
- 4.57 Thread-safe C library functions on page 4-187.
- 4.58 C library functions that are not thread-safe on page 4-189.

1.5.12 Thread safety in the ARM C++ library

The libc++ library is not thread-safe. The functions contained within are only suitable for use in single-threaded environments.

Related concepts

 ${\it 1.5.9 \ How \ to \ ensure \ re-implemented \ mutex \ functions \ are \ called \ on \ page \ 1-28.}$

1.5.11 Thread safety in the ARM C library on page 1-30.

Related references

1.5.10 Using the ARM C library in a multithreaded environment on page 1-28.

1.5.8 Management of locks in multithreaded applications on page 1-26.

1.23.5 Standard C++ library implementation definition on page 1-84.

Related information

cxa*, _aeabi_* functions, C++ ABI for the ARM Architecture.

1.5.13 The floating-point status word in a multithreaded environment

Applicable to variants of the software floating-point libraries that require a status word, the floating-point status word is safe to use in a multithreaded environment, even with software floating-point.

A status word for each thread is stored in its own __user_perthread_libspace block. _____ Note ____

In a hardware floating-point environment, the floating-point status word is stored in a *Vector Floating-Point* (VFP) register. In this case, your thread-switching mechanism must keep a separate copy of this register for each thread.

In ARM Compiler 6 floating-point variants are selected by default. The armclang command-line option -ffast-math selects the other variants.

Related concepts

1.5.11 Thread safety in the ARM C library on page 1-30.

1.6 Support for building an application with the C library

Describes the ARM Compiler features that are supported when building an application with the C library.

This section contains the following subsections:

- 1.6.1 Using the C library with an application on page 1-32.
- 1.6.2 Using the C and C++ libraries with an application in a semihosting environment on page 1-32.
- 1.6.3 Using \$Sub\$\$ to mix semihosted and nonsemihosted I/O functionality on page 1-32.
- 1.6.4 Using the libraries in a nonsemihosting environment on page 1-33.
- 1.6.5 Direct semihosting C library function dependencies on page 1-34.
- 1.6.6 Indirect semihosting C library function dependencies on page 1-35.
- 1.6.7 C library API definitions for targeting a different environment on page 1-36.

1.6.1 Using the C library with an application

Depending on how you use the C and C ++ libraries with your application, you might have to reimplement particular functions.

You can use the C and C ++ libraries with an application in the following ways:

- Build a semihosting application that can be debugged in a semihosted environment such as with the ARM DSTREAM debug and trace unit.
- Build a non-hosted application that, for example, can be embedded into ROM.
- Build an application that does not use main() and does not initialize the library. This application has restricted library functionality, unless you re-implement some functions.

Related concepts

1.6.2 Using the C and C++ libraries with an application in a semihosting environment on page 1-32. 1.6.4 Using the libraries in a nonsemihosting environment on page 1-33.

Related references

1.7.1 Building an application without the C library on page 1-38.

1.6.2 Using the C and C++ libraries with an application in a semihosting environment

If you are developing an application to run in a semihosted environment for debugging, you must have an execution environment that supports A32 or T32 semihosting, and that has sufficient memory.

The execution environment can be provided by either:

- Using the standard semihosting functionality that is present by default in, for example, the ARM DSTREAM debug and trace unit.
- Implementing your own handler for the semihosting calls.

It is not necessary to write any new functions or include files if you are using the default semihosting functionality of the C and C++ libraries.

The ARM debug agents support semihosting, but the memory map assumed by the C library might require tailoring to match the hardware being debugged.

Related references

1.6.3 Using \$Sub\$\$ to mix semihosted and nonsemihosted I/O functionality on page 1-32. 1.6.5 Direct semihosting C library function dependencies on page 1-34.

1.6.3 Using \$Sub\$\$ to mix semihosted and nonsemihosted I/O functionality

You can use \$Sub\$\$ to provide a mixture of semihosted and nonsemihosted functionality.

For example, given an implementation of fputc() that writes directly to a UART, and a semihosted implementation of fputc(), you can provide both of these depending on the nature of the FILE * pointer passed into the function.

Example 1-1 Using \$Sub\$\$ to mix semihosting and nonsemihosting I/O functionality

Related concepts

1.6.2 Using the C and C++ libraries with an application in a semihosting environment on page 1-32. 1.6.4 Using the libraries in a nonsemihosting environment on page 1-33.

Related information

Use of \$Super\$\$ and \$Sub\$\$ to patch symbol definitions. ELF for the ARM Architecture.

1.6.4 Using the libraries in a nonsemihosting environment

Some C library functions use semihosting. If you use the libraries in a nonsemihosting environment, you must ensure that semihosting function calls are dealt with appropriately.

If you do not want to use semihosting, either:


- Remove all calls to semihosting functions.
- Re-implement the lower-level functions, for example, fputc(). You are not required to re-implement all semihosting functions. You must, however, re-implement the functions you are using in your application.

You must re-implement functions that the C library uses to isolate itself from target dependencies. For example, if you use printf() you must re-implement fputc(). If you do not use the higher-level input/output functions like printf(), you do not have to re-implement the lower-level functions like fputc().

• Implement a handler for all of the semihosting calls to be handled in your own specific way. One such example is for the handler to intercept the calls, redirecting them to your own nonsemihosted, that is, target-specific, functions.

To guarantee that no functions using semihosting are included in your application, use either:

- IMPORT use no semihosting from armasm assembly language.
- #pragma import(__use_no_semihosting) from C.



If you include a library function that uses semihosting and also reference __use_no_semihosting, the library detects the conflicting symbols and the linker reports an error. To determine which objects are using semihosting:

- 1. Link with armlink --cpu=8-A.32 --verbose --list err.txt
- 2. Search err.txt for occurrences of I\$use\$semihosting

For example:

```
...
Loading member sys_exit.o from c_4.1.
reference : __I$use$semihosting
definition: _sys_exit
...
```

This shows that the semihosting-using function _sys_exit is linked-in from the C library. To prevent this, you must provide your own implementation of this function.

There are no target-dependent functions in the C++ library, although some C++ functions use underlying C library functions that are target-dependent.

Related concepts

1.1 Mandatory linkage with the C library on page 1-16.

Related references

 ${\it 1.6.3 Using \$Sub\$\$ to mix semihosted and nonsemihosted I/O functionality} \ on \ page \ 1-32.$

1.6.6 Indirect semihosting C library function dependencies on page 1-35.

1.6.7 C library API definitions for targeting a different environment on page 1-36.

Related information

--list=filename linker option.

--verbose linker option.

1.6.5 Direct semihosting C library function dependencies

A table showing the functions that depend directly on semihosting.

Table 1-2 Direct semihosting dependencies

Function	Description
user_setup_stackheap()	Sets up and returns the locations of the stack and the heap. You might have to re-implement this function if you are using a scatter file at the link stage.
_sys_exit()	Error signaling, error handling, and program exit.
_ttywrch()	

Table 1-2 Direct semihosting dependencies (continued)

Function	Description
_sys_command_string()	Tailoring input/output functions in the C and C++ libraries.
_sys_close()	
_sys_iserror()	
_sys_istty()	
_sys_flen()	
_sys_open()	
_sys_read()	
_sys_seek()	
_sys_write()	
_sys_tmpnam()	
clock()	Tailoring other C library functions.
_clock_init()	
remove()	
rename()	
<pre>system()</pre>	
time()	

Related concepts

1.6.2 Using the C and C++ libraries with an application in a semihosting environment on page 1-32. 1.8.1 Initialization of the execution environment and execution of the application on page 1-45.

Related references

1.10 Modification of C library functions for error signaling, error handling, and program exit on page 1-58.

1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

1.6.6 Indirect semihosting C library function dependencies on page 1-35.

1.21 Tailoring non-input/output C library functions on page 1-78.

4.52 user setup stackheap() on page 4-182.

1.6.6 Indirect semihosting C library function dependencies

A table showing functions that depend indirectly on one or more of the directly dependent functions.

You can use this table as an initial guide, but it is recommended that you use either of the following to identify any other functions with indirect or direct dependencies on semihosting at link time:

- #pragma import(use no semihosting) in C source code.
- IMPORT use no semihosting in armasm assembly language source code.

Table 1-3 Indirect semihosting dependencies

Function	Usage
raise()	Catching, handling, or diagnosing C library exceptions, without C signal support. (Tailoring error signaling, error handling, and program exit.)
default_signal_handler()	Catching, handling, or diagnosing C library exceptions, with C signal support. (Tailoring error signaling, error handling, and program exit.)
Heap_Initialize()	Choosing or redefining memory allocation. Avoiding the heap and heap-using C library functions supplied by ARM.
ferror(), fputc(),stdout	Re-implementing the printf family. (Tailoring input/output functions in the C and C+ + libraries.).
backspace(), fgetc(),stdin	Re-implementing the scanf family. (Tailoring input/output functions in the C and C+ + libraries.).
<pre>fwrite(), fputs(), puts(), fread(), fgets(), gets(), ferror()</pre>	Re-implementing the stream output family. (Tailoring input/output functions in the C and C++ libraries.).

Related concepts

1.6.4 Using the libraries in a nonsemihosting environment on page 1-33.

Related references

1.6.5 Direct semihosting C library function dependencies on page 1-34.

1.11.5 Avoiding the heap and heap-using library functions supplied by ARM on page 1-64.

1.10 Modification of C library functions for error signaling, error handling, and program exit on page 1-58.

1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

1.21 Tailoring non-input/output C library functions on page 1-78.

1.6.7 C library API definitions for targeting a different environment

In addition to the direct and indirect semihosting dependent functions, there are a number of functions and files that might be useful when building for a different environment.

The following table shows these functions and files.

Table 1-4 Published API definitions

File or function	Description
main(),rt_entry()	Initializes the runtime environment and executes the user application
rt_lib_init(),rt_exit(),rt_lib_shutdown()	Initializes or finalizes the runtime library
LC_CTYPE locale	Defines the character properties for the local alphabet
rt_sys.h	A C header file describing all the functions whose default (semihosted) implementations use semihosting calls
rt_heap.h	A C header file describing the storage management abstract data type
rt_locale.h	A C header file describing the five locale category <i>filing systems</i> , and defining some macros that are useful for describing the contents of locale categories
rt_misc.h	A C header file describing miscellaneous unrelated public interfaces to the C library
rt_memory.s	An empty, but commented, prototype implementation of the memory model

If you are re-implementing a function that exists in the standard ARM library, the linker uses an object of
library from your project rather than the standard ARM library.
———— Caution ———
Do not replace or delete libraries supplied by ARM. You must not overwrite the supplied library files.

Related concepts

1.6.4 Using the libraries in a nonsemihosting environment on page 1-33.

1.9 Assembler macros that tailor locale functions in the C library on page 1-49.

Place your re-implemented functions in separate object files or libraries instead.

Related information

- --list=filename linker option.
- --verbose linker option.

1.7 Support for building an application without the C library

Describes the ARM Compiler features that are supported and not supported when building an application without the C library.

This section contains the following subsections:

- 1.7.1 Building an application without the C library on page 1-38.
- 1.7.2 Creating an application as bare machine C without the C library on page 1-40.
- 1.7.3 Integer and floating-point compiler functions and building an application without the C library on page 1-40.
- 1.7.4 Bare machine integer C on page 1-41.
- 1.7.5 Bare machine C with floating-point processing on page 1-41.
- 1.7.6 Customized C library startup code and access to C library functions on page 1-42.
- 1.7.7 Using low-level functions when exploiting the C library on page 1-43.
- 1.7.8 Using high-level functions when exploiting the C library on page 1-43.
- 1.7.9 Using malloc() when exploiting the C library on page 1-43.

1.7.1 Building an application without the C library

If your application does not initialize the C library, a number of functions are not available in your application.

Creating an application that has a main() function causes the C library initialization functions to be included as part of __rt lib init.

If your application does not have a main() function, the C library is not initialized and the following functions are not available in your application:

- Low-level stdio functions that have the prefix _sys_.
- Signal-handling functions, signal() and raise() in signal.h.
- Other functions, such as atexit().

The following table shows header files, and the functions they contain, that are available with an uninitialized library. Some otherwise unavailable functions can be used if the library functions they depend on are re-implemented.

Table 1-5 Standalone C library functions

Function	Description
alloca.h	Functions in this file work without any library initialization or function re-implementation. You must know how to build an application with the C library to use this header file.
assert.h	Functions listed in this file require high-level stdio,rt_raise(), and _sys_exit(). You must be familiar with tailoring error signaling, error handling, and program exit to use this header file.
ctype.h	Functions listed in this file require the locale functions.
errno.h	Functions in this file work without the requirement for any library initialization or function re-implementation.
fenv.h	Functions in this file work without the requirement for any library initialization and only require the re-implementation ofrt_raise().
float.h	This file does not contain any code. The definitions in the file do not require library initialization or function reimplementation.
inttypes.h	Functions listed in this file require the locale functions.
limits.h	Functions in this file work without the requirement for any library initialization or function re-implementation.

Table 1-5 Standalone C library functions (continued)

Function	Description	
locale.h	Call setlocale() before calling any function that uses locale functions. For example:	
	setlocale(LC_ALL, "C");	
	See the contents of locale.h for more information on the following functions and data structures:	
	 setlocale() selects the appropriate locale as specified by the category and locale arguments. lconv is the structure used by locale functions for formatting numeric quantities according to the rules of the current locale. 	
	 localeconv() creates an lconv structure and returns a pointer to it. _get_lconv() fills the lconv structure pointed to by the parameter. This ISO extension removes the requirement for static data within the library. 	
	locale.h also contains constant declarations used with locale functions.	
math.h	For functions in this file to work, you must first call _fp_init() and re-implementrt_raise().	
setjmp.h	Functions in this file work without any library initialization or function re-implementation.	
signal.h	Functions listed in this file are not available without library initialization. You must know how to build an application with the C library to use this header file.	
	rt_raise() can be re-implemented for error and exit handling. You must be familiar with tailoring error signaling, error handling, and program exit.	
stdarg.h	Functions listed in this file work without any library initialization or function re-implementation.	
stddef.h	This file does not contain any code. The definitions in the file do not require library initialization or function reimplementation.	
stdint.h	This file does not contain any code. The definitions in the file do not require library initialization or function reimplementation.	
stdio.h	The following dependencies or limitations apply to these functions: • The high-level functions such as printf(), scanf(), puts(), fgets(), fread(), fwrite(), and perror() depend on lower-level stdio functions fgetc(), fputc(), andbackspace(). You must re-implement these lower-level functions when using the standalone C library.	
	However, you cannot re-implement the _sys_ prefixed functions (for example, _sys_read()) when using the standalone C library because the layer of stdio that calls the _sys_ functions requires library initialization.	
	You must be familiar with tailoring the input/output functions in the C and C++ libraries. • The printf() and scanf() family of functions require locale. • The property () and popular() functions are system specific and probably not usable in your application.	
stdlib.h	 The remove() and rename() functions are system-specific and probably not usable in your application. Most functions in this file work without any library initialization or function re-implementation. The following functions depend on other functions being instantiated correctly: ato*() requires locale. strto*() requires locale. malloc(), calloc(), realloc(), and free() require heap functions. atexit() is not available when building an application without the C library. 	
string.h	Functions in this file work without any library initialization, with the exception of strcoll() and strxfrm(), that require locale.	
time.h	mktime() and localtime() can be used immediately	
	time() and clock() are system-specific and are probably not usable unless re-implemented	
	asctime(), ctime(), and strftime() require locale.	

Table 1-5 Standalone C library functions (continued)

Function Description

wchar.h Wide character library functions added to ISO C by *Normative Addendum 1* in 1994.

The following dependencies or limitations apply to these functions:

- The high-level functions such as swprintf(), vswprintf(), swscanf(), and vswscanf() depend on lower-level stdio functions such as fgetwc() and fputwc(). You must re-implement these lower-level functions when using the standalone C library. See 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67 for more information.
- The high-level functions such as swprintf(), vswprintf(), swscanf(), and vswscanf() require locale.
- All the conversion functions (for example, btowc, wctob, mbrtowc, and wcrtomb) require locale.
- wcscoll() and wcsxfrm() require locale.

wctype.h Wide character library functions added to ISO C by Normative Addendum 1 in 1994. This requires locale.

Related concepts

- 1.7.2 Creating an application as bare machine C without the C library on page 1-40.
- 1.9 Assembler macros that tailor locale functions in the C library on page 1-49.
- 1.7.3 Integer and floating-point compiler functions and building an application without the C library on page 1-40.
- 1.7.8 Using high-level functions when exploiting the C library on page 1-43.
- 1.7.7 Using low-level functions when exploiting the C library on page 1-43.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.10 Modification of C library functions for error signaling, error handling, and program exit on page 1-58.

1.7.2 Creating an application as bare machine C without the C library

Bare machine C applications do not automatically use the full C runtime environment provided by the C library.

Even though you are creating an application without the library, some functions from the library that are called implicitly by the compiler must be included. There are also many library functions that can be made available with only minor re-implementations.

Related concepts

- 1.7.3 Integer and floating-point compiler functions and building an application without the C library on page 1-40.
- 1.7.6 Customized C library startup code and access to C library functions on page 1-42.
- 1.7.7 Using low-level functions when exploiting the C library on page 1-43.
- 1.7.8 Using high-level functions when exploiting the C library on page 1-43.
- 1.7.4 Bare machine integer C on page 1-41.
- 1.7.5 Bare machine C with floating-point processing on page 1-41.
- 1.7.9 Using malloc() when exploiting the C library on page 1-43.

Related references

1.7.1 Building an application without the C library on page 1-38.

1.7.3 Integer and floating-point compiler functions and building an application without the C library

There are several compiler helper functions that the compiler uses to handle operations that do not have a short machine code equivalent. These functions require __rt_raise().

For example, integer divide uses a function that is implicitly called by the compiler if there is no divide instruction available in the target instruction set. (ARMv7-R and ARMv7-M architectures use the instructions SDIV and UDIV in Thumb state. Other versions of the ARM architecture also use compiler functions that are implicitly invoked.)

Integer divide, and all the floating-point functions if you use a floating-point mode that involves throwing exceptions, require __rt_raise() to handle math errors. Re-implementing __rt_raise() enables all the math functions, and it avoids having to link in all the signal-handling library code.

Related concepts

1.7.2 Creating an application as bare machine C without the C library on page 1-40.

Related references

1.7.1 Building an application without the C library on page 1-38.

Related information

Application Binary Interface (ABI) for the ARM Architecture.

1.7.4 Bare machine integer C

If you are writing a program in C that does not use the library and is to run without any environment initialization, there are a number of requirements you must meet.

These requirements are:

- Re-implement __rt_raise() if you are using the heap.
- Not define main(), to avoid linking in the library initialization code.
- Write an assembly language veneer that establishes the register state required to run C. This veneer must branch to the entry function in your application.
- Provide your own RW/ZI initialization code.
- Ensure that your initialization veneer is executed by, for example, placing it in your reset handler.
- Build your application using --fpu=none.

When you have met these requirements, link your application normally. The linker uses the appropriate C library variant to find any required compiler functions that are implicitly called.

Many library facilities require __user_libspace for static data. Even without the initialization code activated by having a main() function, __user_libspace is created automatically and uses 96 bytes in the ZI segment.

Related concepts

 ${\it 1.7.2 Creating \ an \ application \ as \ bare \ machine \ C \ without \ the \ C \ library \ on \ page \ 1-40.}$

1.7.5 Bare machine C with floating-point processing on page 1-41.

Related references

1.7.1 Building an application without the C library on page 1-38.

1.5.5 Use of the __user_libspace static data area by the C libraries on page 1-25.

1.7.5 Bare machine C with floating-point processing

If you want to use floating-point processing in an application without the C library, there are a number of requirements you must fulfill.

These requirements are:

- Re-implement __rt_raise() if you are using the heap.
- Not define main(), to avoid linking in the library initialization code.
- Write an assembly language veneer that establishes the register state required to run C. This veneer
 must branch to the entry function in your application. The register state required to run C primarily
 comprises the stack pointer.
- Provide your own RW/ZI initialization code.

- Ensure that your initialization veneer is executed by, for example, placing it in your reset handler.
- Use the appropriate FPU option when you build your application.
- Call _fp_init() to initialize the floating-point status register before performing any floating-point operations.

Do not build your application with the --fpu=none option.

Certain floating-point modes when used with software floating-point support require a floating-point status word. This is enabled by default in ARM Compiler 6, but you can disable it with the armclang command-line option -ffast-math. In such cases, you can also define the function

__rt_fp_status_addr() to return the address of a writable data word to be used instead of the floating-point status register. If you rely on the default library definition of __rt_fp_status_addr(), this word resides in the program data section, unless you define __user_perthread_libspace() (or in the case of legacy code that does not yet use __user_perthread_libspace(), __user_libspace()).

Related concepts

- 1.7.2 Creating an application as bare machine C without the C library on page 1-40.
- 1.7.4 Bare machine integer C on page 1-41.
- 1.5.4 Use of static data in the C libraries on page 1-24.

Related references

- 1.7.1 Building an application without the C library on page 1-38.
- 1.5.5 Use of the user libspace static data area by the C libraries on page 1-25.

1.7.6 Customized C library startup code and access to C library functions

If you build an application with customized startup code, you must either avoid functions that require initialization or provide the initialization and low-level support functions.

When building an application without the C library, if you create an application that includes a main() function, the linker automatically includes the initialization code necessary for the execution environment. There are situations where this is not desirable or possible. For example, a system running a *Real-Time Operating System* (RTOS) might have its execution environment configured by the RTOS startup code.

You can create an application that consists of customized startup code and still use many of the library functions. You must either:

- Avoid functions that require initialization.
- Provide the initialization and low-level support functions.

The functions you must re-implement depend on how much of the library functionality you require:

- If you want only the compiler support functions for division, structure copy, and floating-point arithmetic, you must provide __rt_raise(). This also enables very simple library functions such as those in errno.h, setjmp.h, and most of string.h to work.
- If you call setlocale() explicitly, locale-dependent functions are activated. This enables you to use the atoi family, sprintf(), sscanf(), and the functions in ctype.h.
- armclang uses full IEEE math by default, therefore rt fp status addr() is always required.
- Implementing high-level input/output support is necessary for functions that use fprintf() or fputs(). The high-level output functions depend on fputc() and ferror(). The high-level input functions depend on fgetc() and __backspace().

Implementing these functions and the heap enables you to use almost the entire library.

Related concepts

- 1.7.2 Creating an application as bare machine C without the C library on page 1-40.
- 1.6.1 Using the C library with an application on page 1-32.
- 1.7.4 Bare machine integer C on page 1-41.
- 1.7.7 Using low-level functions when exploiting the C library on page 1-43.

- 1.7.8 Using high-level functions when exploiting the C library on page 1-43.
- 1.7.9 Using malloc() when exploiting the C library on page 1-43.

- 1.7.1 Building an application without the C library on page 1-38.
- 1.5.5 Use of the user libspace static data area by the C libraries on page 1-25.
- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

1.7.7 Using low-level functions when exploiting the C library

If you are using the libraries in an application that does not have a main() function, you must reimplement some functions in the library.

——— Caution ———	
rt_raise() is essential if you	are using the heap.
Note	

If rand() is called, srand() must be called first. This is done automatically during library initialization but not when you avoid the library initialization.

Related concepts

- 1.7.8 Using high-level functions when exploiting the C library on page 1-43.
- 1.7.2 Creating an application as bare machine C without the C library on page 1-40.
- 1.7.6 Customized C library startup code and access to C library functions on page 1-42.

Related references

1.7.1 Building an application without the C library on page 1-38.

1.7.8 Using high-level functions when exploiting the C library

High-level I/O functions can be used if the low-level functions are re-implemented.

High-level I/O functions are those such as fprintf(), printf(), scanf(), puts(), fgets(), fread(), fwrite(), and perror(). Low-level functions are those such as fputc(), fgetc(), and __backspace(). Most of the formatted output functions also require a call to setlocale().

Anything that uses locale must not be called before first calling setlocale().setlocale() selects the appropriate locale. For example, setlocale(LC_ALL, "C"), where LC_ALL means that the call to setlocale() affects all locale categories, and "C" specifies the minimal environment for C translation. Locale-using functions include the functions in ctype.h and locale.h, the printf() family, the scanf() family, ato*, strto*, strcoll/strxfrm, and most of time.h.

Related concepts

- 1.7.7 Using low-level functions when exploiting the C library on page 1-43.
- 1.7.2 Creating an application as bare machine C without the C library on page 1-40.
- 1.7.6 Customized C library startup code and access to C library functions on page 1-42.

Related references

1.7.1 Building an application without the C library on page 1-38.

1.7.9 Using malloc() when exploiting the C library

If heap support is required for bare machine C, you must implement _init_alloc() and __rt_heap_extend().

_init_alloc() must be called first to supply initial heap bounds, and __rt_heap_extend() must be provided even if it only returns failure. Without __rt_heap_extend(), certain library functionality is included that causes problems when you are writing bare machine C.

Prototypes for both _init_alloc() and __rt_heap_extend() are in rt_heap.h.

Related concepts

1.7.2 Creating an application as bare machine C without the C library on page 1-40.

1.7.6 Customized C library startup code and access to C library functions on page 1-42.

1.8 Tailoring the C library to a new execution environment

Tailoring the C library to a new execution environment involves re-implementing functions to produce an application for a new execution environment, for example, embedded in ROM or used with an RTOS.

Functions whose names start with a single or double underscore are used as part of the low-level implementation. You can re-implement some of these functions. Additional information on these library functions is available in the rt_heap.h, rt_locale.h, rt_misc.h, and rt_sys.h include files and the rt memory.s assembler file.

This section contains the following subsections:

- 1.8.1 Initialization of the execution environment and execution of the application on page 1-45.
- 1.8.2 C++ initialization, construction and destruction on page 1-46.
- 1.8.3 Exceptions system initialization on page 1-46.
- 1.8.4 Library functions called from main() on page 1-47.
- 1.8.5 Program exit and the assert macro on page 1-47.

1.8.1 Initialization of the execution environment and execution of the application

You can customize execution initialization by defining your own __main that branches to __rt_entry.

The entry point of a program is at main in the C library where library code:

- 1. Copies non-root (RO and RW) execution regions from their load addresses to their execution addresses. Also, if any data sections are compressed, they are decompressed from the load address to the execution address.
- 2. Zeroes ZI regions.
- 3. Branches to __rt_entry.

If you do not want the library to perform these actions, you can define your own __main that branches to __rt_entry. Use the -e armclang option or --entry armlink option to specify __main as the entry point. For example:

```
.global __rt_entry
.global __main
__main:
B__rt_entry
```

The library function rt entry() runs the program as follows:

- Sets up the stack and the heap by one of a number of means that include calling
 __user_setup_stackheap(), calling __rt_stackheap_init(), or loading the absolute addresses of
 scatter-loaded regions.
- 2. Calls __rt_lib_init() to initialize referenced library functions, initialize the locale and, if necessary, set up argc and argv for main().

For C++, calls the constructors for any top-level objects by way of __cpp_initialize__aeabi_.

3. Calls main(), the user-level root of the application.

From main(), your program might call, among other things, library functions.

4. Calls exit() with the value returned by main().

Related concepts

```
1.8.4 Library functions called from main() on page 1-47.
```

1.8 Tailoring the C library to a new execution environment on page 1-45.

1.8.2 C++ initialization, construction and destruction on page 1-46.

Related references

```
1.6.5 Direct semihosting C library function dependencies on page 1-34.
```

4.22 __*rt_entry* on page 4-151.

4.26 rt lib init() on page 4-155.

1.8.2 C++ initialization, construction and destruction

The C++ standard places certain requirements on the construction and destruction of objects with static storage duration. The static constructors are executed before main(), the destructors are called after the program exits.

The library must ensure that all the static constructors within a translation unit are called in the order of declaration, and the static destructors are called in reverse order of declaration. There is no way to determine the initialization order between translation units.

Each translation unit containing static constructors has an initialization function. This function calls the static constructors for the translation unit, and registers the static destructors with a call to __aeabi_atexit(). Function-local static objects with destructors also register their destructors using aeabi atexit().

The location of the per translation unit initialization function is stored in an .init_array section. At link time the .init_array sections must be collated together into a single contiguous .init_array section. The linker will generate an error if this is not possible.

The library routine __cpp_initialize_aeabi_ is called from the C library startup code __rt_lib_init(), before main(). __cpp_initialize_aeabi_ walks through the .init_array, calling each function in turn.

On exit __rt_lib_shutdown() calls cxa_finalize() which calls the static destructors registered with __aeabi_atexit().

_____ Note _____

- The aeabi atexit() function calls malloc().
- You must not use the std::cout, std::cerr, and std::clog streams in static constructors when using libc++ as these objects have static constructors that are not guaranteed to have been run.

Related concepts

1.8 Tailoring the C library to a new execution environment on page 1-45.

1.8.3 Exceptions system initialization

The exceptions system can be initialized either on demand (that is, when first used), or before entering main().

Initialization on demand has the advantage of not allocating heap memory unless the exceptions system is used, but has the disadvantage that it becomes impossible to throw any exception (such as std::bad alloc) if the heap is exhausted at the time of first use.

The default behavior is to initialize on demand. To initialize the exceptions system before entering main(), include the following function in the link:

```
extern "C" void __cxa_get_globals(void);
extern "C" void __ARM_exceptions_init(void)
{
    __cxa_get_globals();
}
```

Although you can place the call to __cxa_get_globals() directly in your code, placing it in __ARM_exceptions_init() ensures that it is called as early as possible. That is, before any global variables are initialized and before main() is entered.

if

ARM_exceptions_init() is weakly referenced by the library initialization mechanism, and is called
it is present as part ofrt_lib_init().
Note
The exception system is initialized by calls to various library functions, for example, std::set_terminate(). Therefore, you might not have to initialize before the entry to main().

Related concepts

1.8 Tailoring the C library to a new execution environment on page 1-45.

1.8.4 Library functions called from main()

The function main() can call a number of user-customizable functions in the C library.

The function main() is the user-level root of the application. It requires the execution environment to be initialized and input/output functions to be capable of being called. While in main() the program might perform one of the following actions that calls user-customizable functions in the C library:

- Extend the stack or heap.
- Call library functions that require a callout to a user-defined function, for example __rt_fp_status_addr() or clock().
- Call library functions that use locale or CTYPE.
- Perform floating-point calculations that require the floating-point unit or floating-point library.
- Input or output directly through low-level functions, for example putc(), or indirectly through high-level input/output functions and input/output support functions, for example, fprintf() or sys_open().
- Raise an error or other signal, for example ferror.

Related concepts

- 1.8.1 Initialization of the execution environment and execution of the application on page 1-45.
- 1.8 Tailoring the C library to a new execution environment on page 1-45.
- 1.9 Assembler macros that tailor locale functions in the C library on page 1-49.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.21 Tailoring non-input/output C library functions on page 1-78.
- 1.10 Modification of C library functions for error signaling, error handling, and program exit on page 1-58.

1.8.5 Program exit and the assert macro

A program can exit normally at the end of main() or it can exit prematurely because of an error. The behavior of the assert macro depends on a number of conditions:

- If the NDEBUG macro is defined (on the command line or as part of a source file), the assert macro has no effect.
- 2. If the NDEBUG macro is not defined, the assert expression (the expression given to the assert macro) is evaluated. If the result is TRUE, that is != 0, the assert macro has no more effect.
- 3. If the assert expression evaluates to FALSE, the assert macro calls the __aeabi_assert() function if any of the following are true:
 - You are compiling with --strict.
 - You are using -00 or -01.

- __ASSERT_MSG is defined.
- AEABI_PORTABILITY_LEVEL is defined and not 0.
- 4. If the assert expression evaluates to FALSE and the conditions specified in point 3 do not apply, the assert macro calls abort(). Then:
 - a. abort() calls rt raise().
 - b. If rt raise() returns, abort() tries to finalize the library.

If you are creating an application that does not use the library, aeabi assert() works if you reimplement abort() and the stdio functions.

Another solution for retargeting is to re-implement the aeabi assert() function itself. The function prototype is:

```
void aeabi assert(const char *expr, const char *file, int line);
```

where:

- expr points to the string representation of the expression that was not TRUE.
- file and line identify the source location of the assertion.

The behavior for aeabi assert() supplied in the ARM C library is to print a message on stderr and call abort().

Related concepts

1.8 Tailoring the C library to a new execution environment on page 1-45.

Related concepts

- 1.8.2 C++ initialization, construction and destruction on page 1-46.
- 1.8.4 Library functions called from main() on page 1-47.
- 1.8.1 Initialization of the execution environment and execution of the application on page 1-45.
- 1.8.5 Program exit and the assert macro on page 1-47.
- 1.8.3 Exceptions system initialization on page 1-46.

Related references

- 4.22 rt entry on page 4-151.
- 4.23 rt exit() on page 4-152.
- 4.26 rt lib init() on page 4-155.
- 4.27 rt lib shutdown() on page 4-156.

1.9 Assembler macros that tailor locale functions in the C library

Applications use locales when they display or process data that depends on the local language or region, for example, character set, monetary symbols, decimal point, time, and date.

Locale-related functions are declared in the include file, rt locale.

This section contains the following subsections:

- 1.9.1 Link time selection of the locale subsystem in the C library on page 1-49.
- 1.9.2 Runtime selection of the locale subsystem in the C library on page 1-50.
- 1.9.3 Definition of locale data blocks in the C library on page 1-50.
- 1.9.4 LC_CTYPE data block on page 1-52.
- 1.9.5 LC COLLATE data block on page 1-54.
- 1.9.6 LC_MONETARY data block on page 1-55.
- 1.9.7 LC_NUMERIC data block on page 1-55.
- 1.9.8 LC TIME data block on page 1-56.

1.9.1 Link time selection of the locale subsystem in the C library

The locale subsystem of the C library can be selected at link time or can be extended to be selectable at runtime.

The following list describes the use of locale categories by the library:

- The default implementation of each locale category is for the C locale. The library also provides an alternative, ISO8859-1 (Latin-1 alphabet) implementation of each locale category that you can select at link time.
- Both the C and ISO8859-1 default implementations usually provide one locale for each category to select at runtime.
- You can replace each locale category individually.
- You can include as many locales in each category as you choose and you can name your locales as you choose.
- Each locale category uses one word in the private static data of the library.
- The locale category data is read-only and position independent.
- scanf() forces the inclusion of the LC_CTYPE locale category, but in either of the default locales this adds only 260 bytes of read-only data to several kilobytes of code.

ISO8859-1 implementation

The default implementation of each locale category is for the C locale. The library also provides an alternative, ISO8859-1 (Latin-1 alphabet) implementation of each locale category that you can select at link time.

The following table shows the ISO8859-1 (Latin-1 alphabet) locale categories.

Table 1-6 Default ISO8859-1 locales

Symbol	Description
use_iso8859_ctype	Selects the ISO8859-1 (Latin-1) classification of characters. This is essentially 7-bit ASCII, except that the character codes 160-255 represent a selection of useful European punctuation characters, letters, and accented letters.
use_iso8859_collate	Selects the strcoll/strxfrm collation table appropriate to the Latin-1 alphabet. The default C locale does not require a collation table.
use_iso8859_monetary	Selects the Sterling monetary category using Latin-1 coding.
use_iso8859_numeric	Selects separation of thousands with commas in the printing of numeric values.
use_iso8859_locale	Selects all the ISO8859-1 selections described in this table.

There is no ISO8859-1 version of the LC TIME category.

Shift-JIS and UTF-8 implementation

The Shift-JIS and UTF-8 locales let you use Japanese and Unicode characters.

The following table shows the Shift-JIS (Japanese characters) or UTF-8 (Unicode characters) locale categories.

Table 1-7 Default Shift-JIS and UTF-8 locales

Function	Description
use_sjis_ctype	Sets the character set to the Shift-JIS multibyte encoding of Japanese characters
use_utf8_ctype	Sets the character set to the UTF-8 multibyte encoding of all Unicode characters

The following list describes the effects of Shift-JIS and UTF-8 encoding:

• The ordinary ctype functions behave correctly on any byte value that is a self-contained character in Shift-JIS. For example, half-width katakana characters that Shift-JIS encodes as single bytes between 0xA6 and 0xDF are treated as alphabetic by isalpha().

UTF-8 encoding uses the same set of self-contained characters as the ASCII character set.

- The multibyte conversion functions such as mbrtowc(), mbsrtowcs(), and wcrtomb(), all convert between wide strings in Unicode and multibyte character strings in Shift-JIS or UTF-8.
- printf("%1s") converts a Unicode wide string into Shift-JIS or UTF-8 output, and scanf("%1s") converts Shift-JIS or UTF-8 input into a Unicode wide string.

Related concepts

Shift-JIS and UTF-8 implementation on page 1-50.

Related references

ISO8859-1 implementation on page 1-49.

1.9.2 Runtime selection of the locale subsystem in the C library

The C library function setlocale() selects a locale at runtime for the locale category, or categories, specified in its arguments.

It does this by selecting the requested locale separately in each locale category. In effect, each locale category is a small filing system containing an entry for each locale.

The rt_locale.h and rt_locale.s header files describe what must be implemented and provide some useful support macros.

Related references

4.30 setlocale() on page 4-159.

1.9.3 Definition of locale data blocks in the C library

Locale data blocks let you customize your own locales.

The locale data blocks are defined using a set of assembly language macros provided in rt_locale.s. Therefore, the recommended way to define locale blocks is by writing an assembly language source file. The toolchain provides a set of macros for each type of locale data block, for example LC_CTYPE, LC_COLLATE, LC_MONETARY, LC_NUMERIC, and LC_TIME. You define each locale block in the same way with a begin macro, some data macros, and an end macro.

Beginning the definition of a locale block

To begin defining your locale block, call the _begin macro. This macro takes two arguments, a prefix and the textual name, as follows:

LC_TYPE_begin prefix, name

where:

TYPF

is one of the following:

- CTYPE
- COLLATE
- MONETARY
- NUMERIC
- TIME.

prefix

is the prefix for the assembler symbols defined within the locale data

name

is the textual name for the locale data.

Specifying the data for a locale block

To specify the data for your locale block, call the macros for that locale type in the order specified for that particular locale type. The syntax is as follows:

```
LC TYPE function
```

Where:

TYPE

is one of the following:

- CTYPE
- COLLATE
- MONETARY
- NUMERIC
- TIME.

function

is a specific function, table(), full_wctype(), or multibyte(), related to your locale data.

When specifying locale data, you must call the macro repeatedly for each respective function.

Ending the definition of a locale block

To complete the definition of your locale data block, you call the _end macro. This macro takes no arguments, as follows:

```
LC_TYPE_end
```

where:

TYPE

is one of the following:

- CTYPE
- COLLATE
- MONETARY
- NUMERIC
- TIME.

Example of a fixed locale block

To write a fixed function that always returns the same locale, you can use the _start symbol name defined by the macros. The following shows how this is implemented for the CTYPE locale:

```
GET rt_locale.s
AREA my_locales, DATA, READONLY
LC_CTYPE_begin my_ctype_locale, "MyLocale"
...; include other LC_CTYPE_xxx macros here
```

```
LC_CTYPE_end
AREA my_locale_func, CODE, READONLY
_get_lc_ctype FUNCTION
LDR r0, =my_ctype_locale_start
BX lr
ENDFUNC
```

Example of multiple contiguous locale blocks

Contiguous locale blocks suitable for passing to the _findlocale() function must be declared in sequence. You must call the macro LC_index_end to end the sequence of locale blocks. The following shows how this is implemented for the CTYPE locale:

Related references

```
1.9.4 LC_CTYPE data block on page 1-52.
1.9.5 LC_COLLATE data block on page 1-54.
1.9.6 LC_MONETARY data block on page 1-55.
1.9.7 LC_NUMERIC data block on page 1-55.
1.9.8 LC_TIME data block on page 1-56.
```

1.9.4 LC_CTYPE data block

The LC_CTYPE data block configures character classification and conversion.

When defining a locale data block in the C library, the macros that define an LC_CTYPE data block are as follows:

- 1. Call LC CTYPE begin with a symbol name and a locale name.
- 2. Call LC_CTYPE_table repeatedly to specify 256 table entries. LC_CTYPE_table takes a single argument in quotes. This must be a comma-separated list of table entries. Each table entry describes one of the 256 possible characters, and can be either an illegal character (IL) or the bitwise OR of one or more of the following flags:

s	
	whitespace characters
^P	punctuation characters
В	
	printable space characters
	lowercase letters
u	umparanca lattara
N	uppercase letters
	decimal digits
c	control characters
x	void of vilataveers
	hexadecimal digit letters A-F and a

_A
alphabetic but neither uppercase nor lowercase, such as Japanese katakana.
Note
A printable space character is defined as any character where the result of both $isprint()$ and $isspace()$ is true.
A must not be specified for the same character as eitherN orX.

- 3. If required, call one or both of the following optional macros:
 - LC_CTYPE_full_wctype. Calling this macro without arguments causes the C99 wide-character ctype functions (iswalpha(), iswupper(), ...) to return useful values across the full range of Unicode when this LC_CTYPE locale is active. If this macro is not specified, the wide ctype functions treat the first 256 wchar_t values as the same as the 256 char values, and the rest of the wchar t range as containing illegal characters.
 - LC_CTYPE_multibyte defines this locale to be a multibyte character set. Call this macro with three arguments. The first two arguments are the names of functions that perform conversion between the multibyte character set and Unicode wide characters. The last argument is the value that must be taken by the C macro MB_CUR_MAX for the respective character set. The two function arguments have the following prototypes:

```
size_t internal_mbrtowc(wchar_t *pwc, char c, mbstate_t *pstate);
size_t internal_wcrtomb(char *s, wchar_t w, mbstate_t *pstate);
```

internal_mbrtowc()

takes one byte, c, as input, and updates the mbstate_t pointed to by pstate as a result of reading that byte. If the byte completes the encoding of a multibyte character, it writes the corresponding wide character into the location pointed to by pwc, and returns 1 to indicate that it has done so. If not, it returns -2 to indicate the state change of mbstate_t and that no character is output. Otherwise, it returns -1 to indicate that the encoded input is invalid.

internal wcrtomb()

takes one wide character, w, as input, and writes some number of bytes into the memory pointed to by s. It returns the number of bytes output, or -1 to indicate that the input character has no valid representation in the multibyte character set.

4. Call LC CTYPE end, without arguments, to finish the locale block definition.

Example LC_CTYPE data block

```
LC_CTYPE_begin utf8_ctype, "UTF-8"
 Single-byte characters in the low half of UTF-8 are exactly
                           locale.
 the same as in the normal "C"
LC CTYPE table
                               cΤ
                       _C|_
LC_CTYPE_table "
                                             0x09-0x0D(BS,LF,VT,FF,CR)
LC CTYPE table
                                                        0x0E-0x16
                                                        0x17-0x1F
  CTYPE_table
  _CTYPE_table
_CTYPE_table
  _CTYPE_table
_CTYPE_table
  _CTYPE_table
  CTYPE_table
                                                            (" ;
G-P
  _CTYPE_table
  CTYPE_table
  _CTYPE_table
_CTYPE_table
.C_CTYPE_table
  CTYPE_table
  _CTYPE_table
LC_CTYPE_table
 Nothing in the top half of UTF-8 is valid on its own as a
 single-byte character, so they are all illegal characters (IL).
```

```
LC_CTYPE_table '
          The UTF-8 ctype locale wants the full version of wctype.
LC CTYPE full wctype
 UTF-8 is a multibyte locale, so we must specify some conversion functions. MB_CUR_MAX is 6 for UTF-8 (the lead
 bytes 0xFC and 0xFD are each followed by five continuation
 bytes).
 The implementations of the conversion functions are not
 provided in this example.
IMPORT utf8 mbrtowc
IMPORT utf8_wcrtomb
LC_CTYPE_multibyte utf8_mbrtowc, utf8_wcrtomb, 6
LC_CTYPE_end
```

1.9.3 Definition of locale data blocks in the C library on page 1-50.

1.9.5 LC COLLATE data block

The LC COLLATE data block configures collation of strings.

When defining a locale data block in the C library, the macros that define an LC_COLLATE data block are as follows:

- 1. Call LC_COLLATE_begin with a symbol name and a locale name.
- 2. Call one of the following alternative macros:
 - Call LC_COLLATE_table repeatedly to specify 256 table entries. LC_COLLATE_table takes a single argument in quotes. This must be a comma-separated list of table entries. Each table entry describes one of the 256 possible characters, and can be a number indicating its position in the sorting order. For example, if character A is intended to sort before B, then entry 65 (corresponding to A) in the table, must be smaller than entry 66 (corresponding to B).
 - Call LC_COLLATE_no_table without arguments. This indicates that the collation order is the same as the string comparison order. Therefore, strcoll() and strcmp() are identical.
- 3. Call LC COLLATE end, without arguments, to finish the locale block definition.

Example LC COLLATE data block

```
"IS08859-1"
LC_COLLATE_begin iso88591_collate,
LC_COLLATE_table "0x00,
LC_COLLATE_table "0x08,
                     "0x00,
                                    0x02, 0x03, 0x04,
                                                          0x05,
                                                                 0x06, 0x07'
                             0x01,
                             0x09,
                                    0x0a, 0x0b, 0x0c, 0x0d,
                                                                 0x0e,
                                                                         0x0f"
LC_COLLATE_table "0x10,
LC_COLLATE_table "0x18,
                                    0x12,
                                           0x13, 0x14,
                                                          0x15,
                             0x11,
                                                                 0x16,
                                                                         0x17"
                             0x19,
                                                                 0x1e,
                                    0x1a, 0x1b, 0x1c,
                             0x21,
LC_COLLATE_table "0x20,
                                    0x22, 0x23, 0x24,
                                                          0x25.
                                                                 0x26,
                                                                         0x27'
                             0x29,
LC COLLATE table "0x28,
                                    0x2a, 0x2b, 0x2c, 0x2d,
                                                                 0x2e,
                                                                        0x2f"
LC_COLLATE_table "0x30,
LC_COLLATE_table "0x38,
                                    0x32,
                                           0x33,
                             0x31,
                                                   0x34,
                                                          0x35,
                                                                 0x36,
                                                                         0x3f"
                             0x39,
                                    0x3a, 0x3b, 0x3c, 0x3d, 0x3e,
LC_COLLATE_table
LC_COLLATE_table
LC_COLLATE_table
LC_COLLATE_table
LC_COLLATE_table
LC_COLLATE_table
                     "0x40,
                             0x41,
                                    0x49,
                                           0x4a, 0x4c,
                                                          0x4d,
                                                                 0x52,
                                                                         0x53
                                    0x5a,
                                           0x5b, 0x5c,
                                                          0x5d,
                    "0x54,
                             0x55,
                                                                 0x5e,
                                                                         0x60"
                    "0x67,
                                    0x69,
                             0x68,
                                           0x6a,
                                                   0x6b,
                                                          0x6c,
                                                                 0x71,
                                                                         0x72'
                    "0x73,
                             0x74,
                                    0x76,
                                           0x79,
                                                          0x7b,
                                                   0x7a,
                                                                 0x7c,
                                                                         0x7d"
                                           0x88,
                     "0x7e,
                             0x7f,
                                    0x87,
                                                   0x8a,
                                                          0x8b,
                                                                 0x90,
                                                                         0x91
                    "0x92,
                             0x93,
                                           0x99,
                                                   0x9a,
                                                          0x9b,
                                                                 0x9c,
                                                                         0x9e"
                                    0x98.
LC_COLLATE_table
LC_COLLATE_table
LC_COLLATE_table
LC_COLLATE_table
                     "0xa5,
                             0xa6,
                                    0xa7,
                                           0xa8,
                                                          0xab,
                                                                 0xb0,
                                                   0xaa,
                                                                         0xh1'
                    "0xb2,
                                           0xb9,
                                                                 0xbc,
                                                                         0xbd"
                             0xb3,
                                    0xb6,
                                                   0xba,
                                                          0xbb,
                    "0xbe,
                                           0xc1,
                             0xbf,
                                                                 0xc4,
                                                   0xc2,
                                                          0xc3,
                                                                         0xc5
                                    0xc0,
                    "0xc6,
                             0xc7,
                                    0xc8,
                                                          0xcb,
                                           0xc9,
                                                   0xca,
                                                                 0xcc,
                                                                         0xcd'
LC_COLLATE_table
LC_COLLATE_table
                                           0xd1,
                                                                 0xd4,
                     "0xce,
                             0xcf,
                                    0xd0,
                                                          0xd3,
                                                   0xd2,
                                                                         0xd5
                    "0xd6,
                             0xd7,
                                           0xd9,
                                                          0xdb,
                                                                         0xdd"
                                    0xd8,
                                                   0xda,
                                                                 0xdc,
                    "0xde,
                                           0xe1,
                                                                 0xe4,
LC_COLLATE_table
LC_COLLATE_table
                             0xdf,
                                                   0xe2,
                                                          0xe3,
                                    0xe0,
                                                                         0xe5
                    "0xe6,
                             0xe7,
                                    0xe8,
                                           0xe9,
                                                                 0xec,
                                                          0xeb,
                                                   0xea,
                                                                         0xed'
                    "0xee,
                                           0xf1,
                                                   0xf2,
                                                          0xf3,
LC_COLLATE_table
                             0xef,
                                    0xf0,
                                                                 0xf4,
                                                                         0xf5
                     "0xf6,
                                                          0xfb,
                                           0xf9,
LC_COLLATE_table
                             0xf7,
                                    0xf8,
                                                   0xfa,
                                                                 0xfc,
                                                                         0xfd'
                                    0x44,
                                           0x45,
                                                          0x47,
                                                                 0x48,
                     "0x42,
                             0x43,
LC_COLLATE_table LC_COLLATE_table
                                                   0x46,
                                                                         0x4b'
                    "0x4e,
                                                                 0x58,
                                                                         0x59"
                             0x4f,
                                                   0x56,
                                                          0x57,
                                    0x50,
                                           0x51,
LC_COLLATE_table "0x77,
                             0x5f,
                                    0x61, 0x62, 0x63,
                                                          0x64,
                                                                 0x65,
                                                                         0xfe"
LC_COLLATE_table "0x66,
                                    0x6e,
                                           0x6f,
                                                          0x75,
                                                                 0x78,
                             0x6d,
                                                   0x70,
                                                                         0xa9'
LC_COLLATE_table "0x80, 0x81, 0x82, 0x83, 0x84, 0x85,
                                                                 0x86, 0x89"
```

```
LC_COLLATE_table "0x8c, 0x8d, 0x8e, 0x8f, 0x94, 0x95, 0x96, 0x97"
LC_COLLATE_table "0xb7, 0x9d, 0x9f, 0xa0, 0xa1, 0xa2, 0xa3, 0xff"
LC_COLLATE_table "0xa4, 0xac, 0xad, 0xae, 0xaf, 0xb4, 0xb8, 0xb5"
LC_COLLATE_end
```

1.9.3 Definition of locale data blocks in the C library on page 1-50. ISO8859-1 implementation on page 1-49.

1.9.6 LC_MONETARY data block

The LC_MONETARY data block configures formatting of monetary values.

When defining a locale data block in the C library, the macros that define an LC_MONETARY data block are as follows:

- 1. Call LC_MONETARY_begin with a symbol name and a locale name.
- 2. Call the LC MONETARY data macros as follows:
 - a. Call LC_MONETARY_fracdigits with two arguments: frac_digits and int_frac_digits from the lconv structure.
 - b. Call LC_MONETARY_positive with four arguments: p_cs_precedes, p_sep_by_space, p_sign_posn and positive_sign.
 - c. Call LC_MONETARY_negative with four arguments: n_cs_precedes, n_sep_by_space, n sign posn and negative sign.
 - d. Call LC_MONETARY_currsymbol with two arguments: currency_symbol and int_curr_symbol.
 - e. Call LC_MONETARY_point with one argument: mon_decimal_point.
 - $f. \quad Call \ \ LC_MONETARY_thousands \ with \ one \ argument: \ mon_thousands_sep.$
 - g. Call LC MONETARY grouping with one argument: mon grouping.
- 3. Call LC MONETARY end, without arguments, to finish the locale block definition.

Example LC MONETARY data block

```
LC_MONETARY_begin c_monetary, "C"
LC_MONETARY_fracdigits 255, 255
LC_MONETARY_positive 255, 255, 255, ""
LC_MONETARY_negative 255, 255, 255, ""
LC_MONETARY_currsymbol "", ""
LC_MONETARY_point ""
LC_MONETARY_thousands ""
LC_MONETARY_grouping ""
LC_MONETARY_grouping ""
LC_MONETARY_end
```

Related references

1.9.3 Definition of locale data blocks in the C library on page 1-50.

1.9.7 LC_NUMERIC data block

The LC_NUMERIC data block configures formatting of numeric values that are not monetary.

When defining a locale data block in the C library, the macros that define an LC_NUMERIC data block are as follows:

- 1. Call LC_NUMERIC_begin with a symbol name and a locale name.
- 2. Call the LC_NUMERIC data macros as follows:
 - a. Call LC NUMERIC point with one argument: decimal point from lconv structure.
 - b. Call LC NUMERIC thousands with one argument: thousands sep.
 - c. Call LC NUMERIC grouping with one argument: grouping.
- 3. Call LC_NUMERIC_end, without arguments, to finish the locale block definition.

Example LC_NUMERIC data block

```
LC_NUMERIC_begin c_numeric, "C"
LC_NUMERIC_point "."
LC_NUMERIC_thousands ""
LC_NUMERIC_grouping ""
LC_NUMERIC_end
```

1.9.3 Definition of locale data blocks in the C library on page 1-50.

1.9.8 LC_TIME data block

The LC_TIME data block configures formatting of date and time values.

When defining a locale data block in the C library, the macros that define an LC_TIME data block are as follows:

- 1. Call LC TIME begin with a symbol name and a locale name.
- 2. Call the LC TIME data macros as follows:
 - a. Call LC_TIME_week_short seven times to provide the short names for the days of the week. Sunday being the first day. Then call LC_TIME_week_long and repeat the process for long names.
 - b. Call LC_TIME_month_short twelve times to provide the short names for the days of the month. Then call LC_TIME month_long and repeat the process for long names.
 - c. Call LC_TIME_am_pm with two arguments that are respectively the strings representing morning and afternoon.
 - d. Call LC_TIME_formats with three arguments that are respectively the standard date/time format used in strftime("%c"), the standard date format strftime("%x"), and the standard time format strftime("%X"). These strings must define the standard formats in terms of other simpler strftime primitives. The example below shows that the standard date/time format is permitted to reference the other two formats.
 - e. Call LC_TIME_c99format with a single string that is the standard 12-hour time format used in strftime("%r") as defined in C99.
- 3. Call LC_TIME_end, without arguments, to finish the locale block definition.

Example LC_TIME data block

```
LC_TIME_begin c_time,
LC_TIME_week_short "Sun"
LC_TIME_week_short "Mon"
LC_TIME_week_short "Tue"
LC_TIME_week_short "Wed"
LC_TIME_week_short "Thu"
LC_TIME_week_short "Fri"
   _TIME_week_short "Sat"
LC_TIME_week_long
LC_TIME_week_long
LC_TIME_week_long
                       "Sunday'
                       "Monday
                      "Tuesday"
LC_TIME_week_long
LC_TIME_week_long
                      "Wednesday"
"Thursday"
LC_TIME_week_long
LC_TIME_week_long
                       "Friday
                      "Saturday'
LC_TIME_month_short "Jan"
LC_TIME_month_short "Feb"
LC_TIME_month_short "Mar"
                         "Apr"
LC_TIME_month_short
                         "May"
LC_TIME_month_short
                         "Jun"
LC_TIME_month_short
                         "Jul"
LC_TIME_month_short
                         "Aug'
LC_TIME_month_short
                         "Sep"
LC_TIME_month_short
   TIME_month_short
LC_TIME_month_short "Dec"
LC_TIME_month_long "January"
LC_TIME_month_long "February"
                         "Nov"
LC_TIME_month_short
                        "March
LC_TIME_month_long
   _TIME_month_long
                         'April"
                       "May"
LC_TIME_month_long
   TIME_month_long
                         'June"
LC_TIME_month_long
                        "August"
LC_TIME_month_long
                        "September"
LC_TIME_month_long
   TIME_month_long
                        "October
LC_TIME_month_long
                        "November"
LC_TIME_month_long
LC_TIME_am_pm "AM"
                        "December"
   LC_TIME_end
```

1.9.3 Definition of locale data blocks in the C library on page 1-50.

Related references

 ${\it 1.6.7~C~library~API~definitions~for~targeting~a~different~environment}~on~page~1-36.$

1.7.1 Building an application without the C library on page 1-38.

1.10 Modification of C library functions for error signaling, error handling, and program exit

All trap or error signals raised by the C library go through the __raise() function. You can reimplement this function or the lower-level functions that it uses.

——— Caution ———

The IEEE 754 standard for floating-point processing states that the default response to an exception is to proceed without a trap. You can modify floating-point error handling by tailoring the functions and definitions in fenv.h.

The rt misc.h header file contains more information on error-related functions.

The following table shows the trap and error-handling functions.

Table 1-8 Trap and error handling

Function	Description
_sys_exit()	Called, eventually, by all exits from the library.
errno	Is a static variable used with error handling.
rt_errno_addr()	Is called to obtain the address of the variable errno.
raise()	Raises a signal to indicate a runtime anomaly.
rt_raise()	Raises a signal to indicate a runtime anomaly.
default_signal_handler()	Displays an error indication to the user.
_ttywrch()	Writes a character to the console. The default implementation of _ttywrch() is semihosted and, therefore, uses semihosting calls.
rt_fp_status_addr()	This function is called to obtain the address of the floating-point status word.

Related references

```
1.6.5 Direct semihosting C library function dependencies on page 1-34.
```

1.6.6 Indirect semihosting C library function dependencies on page 1-35.

1.7.1 Building an application without the C library on page 1-38.

4.39 _sys_exit() on page 4-169.

4.6 errno on page 4-134.

4.18 __raise() on page 4-147.

4.28 rt raise() on page 4-157.

4.5 default signal handler() on page 4-133.

4.49 ttywrch() on page 4-179.

4.24 __rt_fp_status_addr() on page 4-153.

1.11 Stack and heap memory allocation and the ARM C and C++ libraries

The ARM C and C++ libraries require you to specify where the stack pointer begins, but specifying the heap is optional. However, some library functions use the heap, either explicitly (for example malloc) or implicitly (for example fopen).

If you are providing a heap, you must:

- Understand the heap usage requirements of the ARM C and C++ libraries.
- Configure the size and placement of the heap.
- · Consider which heap implementation you want to use.

If you are not providing a heap, you must:

- Understand the heap usage requirements of the ARM C and C++ libraries.
- Understand how to avoid or reimplement the heap-using functions.

This section contains the following subsections:

- 1.11.1 Library heap usage requirements of the ARM C and C++ libraries on page 1-59.
- 1.11.2 Choosing a heap implementation for memory allocation functions on page 1-60.
- 1.11.3 Stack pointer initialization and heap bounds on page 1-61.
- 1.11.4 Legacy support for __user_initial_stackheap() on page 1-63.
- 1.11.5 Avoiding the heap and heap-using library functions supplied by ARM on page 1-64.

1.11.1 Library heap usage requirements of the ARM C and C++ libraries

Functions such as malloc() and other dynamic memory allocation functions explicitly allocate memory when used. However, some library functions and mechanisms *implicitly* allocate memory from the heap.

If heap usage requirements are significant to your code development (for example, you might be developing code for an embedded system with a tiny memory footprint), you must be aware of both implicit and explicit heap requirements.

In C standardlib, implicit heap usage occurs as a result of:

- Calling the library function fopen() and the first time that an I/O operation is applied to the resulting stream.
- Passing command-line arguments into the main() function.

The size of heap memory allocated for fopen() is 80 bytes for the FILE structure. When the first I/O operation occurs, and not until the operation occurs, an additional default of 512 bytes of heap memory is allocated for a buffer associated with the operation. You can reconfigure the size of this buffer using setvbuf().

When fclose() is called, the default 80 bytes of memory is kept on a freelist for possible re-use. The 512-byte buffer is freed on fclose().

Declaring main() to take arguments requires 256 bytes of implicitly allocated memory from the heap. This memory is never freed because it is required for the duration of main(). In microlib, main() must not be declared to take arguments, so this heap usage requirement only applies to standardlib. In the standardlib context, it only applies if you have a heap.

Note	
The memory sizes quot	ed might change in future releases

Related concepts

2.3 Library heap usage requirements of microlib on page 2-95.

Related references

1.11.5 Avoiding the heap and heap-using library functions supplied by ARM on page 1-64. 1.11.2 Choosing a heap implementation for memory allocation functions on page 1-60.

1.11.2 Choosing a heap implementation for memory allocation functions

malloc(), realloc(), calloc(), and free() are built on a heap abstract data type. You can choose between Heap1 or Heap2, the two provided heap implementations.

The available heap implementations are:

- Heap1, the default implementation, implements the smallest and simplest heap manager.
- Heap2 provides an implementation with the performance cost of malloc() or free() growing logarithmically with the number of free blocks.

Note	
The default implementations of malloc(), reallowap.	c(), and calloc() maintain an eight-byte aligned

Heap1

Heap1, the default implementation, implements the smallest and simplest heap manager.

The heap is managed as a single-linked list of free blocks held in increasing address order. The allocation policy is first-fit by address.

This implementation has low overheads, but the performance cost of malloc() or free() grows linearly with the number of free blocks. The smallest block that can be allocated is four bytes and there is an additional overhead of four bytes. If you expect more than 100 unallocated blocks it is recommended that you use Heap2.

Heap2

Heap2 provides an implementation with the performance cost of malloc() or free() growing logarithmically with the number of free blocks.

The allocation policy is first-fit by address. The smallest block that can be allocated is 12 bytes and there is an additional overhead of 4 bytes.

Heap2 is recommended when you require near constant-time performance in the presence of hundreds of free blocks. To select the alternative standard implementation, use either of the following:

- IMPORT __use_realtime_heap from assembly language.
- asm(".global use realtime heap\n") from C.

The Heap2 real-time heap implementation must know the maximum address space that the heap can span. The smaller the address range, the more efficient the algorithm is.

By default, the heap extent is taken to be 16MB starting at the beginning of the heap (defined as the start of the first chunk of memory given to the heap manager by __rt_initial_stackheap() or __rt_heap_extend()).

The heap bounds are given by:

```
struct __heap_extent {
    unsigned base, range;
};
__value_in_regs struct __heap_extent __user_heap_extent(
    unsigned defaultbase, unsigned defaultsize);
```

The function prototype for __user_heap_extent() is in rt_misc.h.

(The Heap1 algorithm does not require the bounds on the heap extent. Therefore, it never calls this function.)

You must implement __user_heap_extent() if:

- You require a heap to span more than 16MB of address space.
- Your memory model can supply a block of memory at a lower address than the first one supplied.

If you know in advance that the address space bounds of your heap are small, you do not have to implement __user_heap_extent(), but it does speed up the heap algorithms if you do.

The input parameters are the default values that are used if this routine is not defined. You can, for example, leave the default base value unchanged and only adjust the size.

Note	

The size field returned must be a power of two. The library does not check this and fails in unexpected ways if this requirement is not met. If you return a size of zero, the extent of the heap is set to 4GB.

Related references

1.11.5 Avoiding the heap and heap-using library functions supplied by ARM on page 1-64. 4.2 alloca() on page 4-130.

1.11.3 Stack pointer initialization and heap bounds

The C library requires you to specify where the stack pointer begins. If you intend to use ARM library functions that use the heap, for example, malloc(), calloc(), or if you define argc and argv command-line arguments for main(), the C library also requires you to specify which region of memory the heap is initially expected to use.

You must always specify where the stack pointer begins. The initial stack pointer must be aligned to a multiple of eight bytes.

You might have to configure the heap if, for example:

- You intend to use ARM library functions that use the heap, for example, malloc(), calloc().
- You define argc and argv command-line arguments for main()

If you are using the C library's initialization code, use any of the following methods to configure the stack and heap:

- Use the symbols __initial_sp, __heap_base, and __heap_limit.
- Use a scatter file to define ARM_LIB_STACKHEAP, ARM_LIB_STACK, or ARM_LIB_HEAP regions.
- Implement __user_setup_stackheap() or __user_initial_stackheap().

 Note —

The first two methods are the only methods that microlib supports for defining where the stack pointer starts and for defining the heap bounds.

If you are not using the C library's initialization code (see 1.7.1 Building an application without the C library on page 1-38), use the following method to configure the stack and heap:

- Set up the stack pointer manually at your application's entry point.
- Call _init_alloc() to set up an initial heap region, and implement __rt_heap_extend() if you need to add memory to it later.

Configuring the stack and heap with symbols

Define the symbol __initial_sp to point to the top of the stack.

If using the heap, also define symbols heap base and heap limit.

You can define these symbols in an assembly language file, or by using the embedded assembler in C.


For example:

```
_asm void dummy_function(void)

{
    EXPORT __initial_sp
    EXPORT __heap_base
    EXPORT __heap_limit
    __initial_sp EQU STACK_BASE
    __heap_base EQU HEAP_BASE
```

```
__heap_limit EQU (HEAP_BASE + HEAP_SIZE)
}
```

The constants STACK_BASE, HEAP_BASE and HEAP_SIZE can be defined in a header file, for example stack.h, as follows:



This method of specifying the initial stack pointer and heap bounds is supported by both the standard C library (standardlib) and the micro C library (microlib).

Configuring the stack and heap with a scatter file

In a scatter file, either:

- Note

- Define ARM_LIB_STACK and ARM_LIB_HEAP regions.
 - If you do not intend to use the heap, only define an ARM LIB STACK region.
- Define an ARM LIB STACKHEAP region.

If you define an ARM_LIB_STACKHEAP region, the stack starts at the top of that region. The heap starts at the bottom.

Configuring the stack and heap with __user_setup_stackheap() or __user_initial_stackheap()

Implement __user_setup_stackheap() to set up the stack pointer and return the bounds of the initial heap region.

If you are using legacy code that uses __user_initial_stackheap(), and you do not want to replace __user_initial_stackheap() with __user_setup_stackheap(), continue to use __user_initial_stackheap().

Note

ARM recommends that you switch to using __user_setup_stackheap() if you are still using __user_initial_stackheap(), unless your implementation of __user_initial_stackheap() is:

- Specialized in some way such that it is complex enough to require its own temporary stack to run on before it has created the proper stack.
- Has some user-specific special requirement that means it has to be implemented in C rather than in assembly language.

Configuring the heap from bare machine C using _init_alloc and __rt_heap_extend

If you are using a heap implementation from bare machine C (that is an application that does not define main() and does not initialize the C library) you must define the base and top of the heap as well as providing a heap extension function.

I.	Call_init_alloc(base,	top) to define the base and top of the memory you want to manage as a
	heap.	
	Note	_

The parameters of _init_alloc(base, top) must be eight-byte aligned.

2. Define the function unsigned __rt_heap_extend(unsigned size, void **block) to handle calls to extend the heap when it becomes full.

Stack and heap collision detection

By default, if memory allocated for the heap is destined to overlap with memory that lies in close proximity with the stack, the potential collision of heap and stack is automatically detected and the requested heap allocation fails. If you do not require this automatic collision detection, you can save a small amount of code size by disabling it with #pragma import use two region memory.

 Note —

The memory allocation functions (malloc(), realloc(), calloc(), posix_memalign()) attempt to detect allocations that collide with the current stack pointer. Such detection cannot be guaranteed to always be successful.

Although it is possible to automatically detect expansion of the heap into the stack, it is not possible to automatically detect expansion of the stack into heap memory.

For legacy purposes, it is possible for you to bypass all of these methods and behavior. You can do this by defining the following functions to perform your own stack and heap memory management:

- __rt_stackheap_init()
- __rt_heap_extend()

Extending heap size at runtime

To enable the heap to extend into areas of memory other than the region of memory that is specified when the program starts, you can redefine the function __user_heap_extend().

__user_heap_extend() returns blocks of memory for heap usage in extending the size of the heap.

Related concepts

1.11.4 Legacy support for user initial stackheap() on page 1-63.

Related references


- 4.50 user heap extend() on page 4-180.
- 4.51 user heap extent() on page 4-181.
- 4.25 __rt_heap_extend() on page 4-154.
- 4.29 rt stackheap init() on page 4-158.
- 4.52 __user_setup_stackheap() on page 4-182.
- 4.53 vectab stack and reset on page 4-183.
- 4.52 user setup stackheap() on page 4-182.

Related information

Specifying stack and heap using the scatter file.

1.11.4 Legacy support for __user_initial_stackheap()

Defined in rt_misc.h, __user_initial_stackheap() is supported for backwards compatibility with earlier versions of the ARM C and C++ libraries.



The differences between user initial stackheap() and user setup stackheap() are:

__user_initial_stackheap() receives the stack pointer (containing the same value it had on entry to __main()) in r1, and is expected to return the new stack base in r1.

- __user_setup_stackheap() receives the stack pointer in sp, and returns the stack base in sp.
- __user_initial_stackheap() is provided with a small temporary stack to run on. This temporary stack enables __user_initial_stackheap() to be implemented in C, providing that it uses no more than 88 bytes of stack space.

__user_setup_stackheap() has no temporary stack and cannot usually be implemented in C.

Using __user_setup_stackheap() instead of __user_initial_stackheap() reduces code size, because __user_setup_stackheap() has no requirement for a temporary stack.

In the following circumstances you cannot use the provided __user_setup_stackheap() function, but you can use the __user_initial_stackheap() function:

- Your implementation is sufficiently complex that it warrants the use of a temporary stack when setting up the initial heap and stack.
- You have a requirement to implement the heap and stack creation code in C rather than in assembly language.

Related concepts

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

Related references

4.52 user setup stackheap() on page 4-182.

1.11.5 Avoiding the heap and heap-using library functions supplied by ARM

If you are developing embedded systems that have limited RAM or that provide their own heap management (for example, an operating system), you might require a system that does not define a heap area.

To avoid using the heap you can either:

- Re-implement the functions in your own application.
- Write the application so that it does not call any heap-using function.

You can reference the <u>_use_no_heap</u> or <u>_use_no_heap_region</u> symbols in your code to guarantee that no heap-using functions are linked in from the ARM library. You are only required to import these symbols once in your application, for example, using either:

- IMPORT __use_no_heap from assembly language.
- asm(".global __use_no_heap\n") from C.

If you include a heap-using function and also reference __use_no_heap or __use_no_heap_region, the linker reports an error. For example, the following sample code results in the linker error shown:

```
#include <stdio.h>
#include <stdlib.h>
#pragma import(_use_no_heap)
void main()
{
    char *p = malloc(256);
    ...
}
```

Error: L6915E: Library reports error: __use_no_heap was requested, but malloc was referenced

To find out which objects are using the heap, link with --verbose --list=out.txt, search the output for the relevant symbol (in this case malloc), and find out what object referenced it.

__use_no_heap guards against the use of malloc(), realloc(), free(), and any function that uses those functions. For example, calloc() and other stdio functions.

__use_no_heap_region has the same properties as __use_no_heap, but in addition, guards against other things that use the heap memory region. For example, if you declare main() as a function taking arguments, the heap region is used for collecting argc and argv.

1.6.6 Indirect semihosting C library function dependencies on page 1-35.
1.11.2 Choosing a heap implementation for memory allocation functions on page 1-60.

Related information

- --list=filename linker option.
- --verbose linker option.

1.12 Tailoring input/output functions in the C and C++ libraries

The input/output library functions, such as the high-level fscanf() and fprintf(), and the low-level fputc() and ferror(), and the C++ object std::cout, are not target-dependent. However, the high-level library functions perform input/output by calling the low-level ones. These low-level functions call system I/O functions that are target-dependent.

To retarget input/output, you can:

- Avoid the high-level library functions.
- Redefine the low-level library functions.
- Redefine the system I/O functions.

Whether redefining the low-level library functions or redefining the system I/O functions is a better solution depends on your use. For example, UARTs write a single character at a time and the default fputc() uses buffering, so redefining this function without a buffer might suit a UART. However, where buffer operations are possible, redefining the system I/O functions would probably be more appropriate.

Related concepts

```
1.14 The C library printf family of functions on page 1-69.
```

1.15 The C library scanf family of functions on page 1-70.

1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.

```
1.17 The C library functions fread(), fgets() and gets() on page 1-73.
```

- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

```
1.6.5 Direct semihosting C library function dependencies on page 1-34.
```

- 1.6.6 Indirect semihosting C library function dependencies on page 1-35.
- 1.7.1 Building an application without the C library on page 1-38.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.
- 4.36 sys close() on page 4-166.
- 4.37 _sys_command_string() on page 4-167.
- 4.38 sys ensure() on page 4-168.
- 4.40 sys flen() on page 4-170.
- 4.41 _sys_istty() on page 4-171.
- 4.42 sys open() on page 4-172.
- 4.43 sys read() on page 4-173.
- 4.44 sys seek() on page 4-174.
- 4.45 sys tmpnam() on page 4-175.
- 4.46 sys write() on page 4-176.
- 4.8 fisatty() on page 4-136.
- 4.41 sys istty() on page 4-171.

1.13 Target dependencies on low-level functions in the C and C++ libraries

Higher-level C and C++ library input/output functions are built upon lower-level functions. If you define your own versions of the lower-level functions, you can use the library versions of the higher-level functions directly.

The following table shows the dependencies of the higher-level functions on lower-level functions.

Note		
You must provide definitions of _	_stdin and _	_stdout if you use any of their associated high-level
functions. This applies even if you	ur re-impleme	ntations of other functions, such as fgetc() and

D 1 1 1

Table key:

- 1. FILE, the file structure.
- 2. __stdin, the standard input object of type __FILE.
- 3. __stdout, the standard output object of type __FILE.
- 4. fputc(), outputs a character to a file.
- 5. ferror(), returns the error status accumulated during file I/O.

fgetc() uses __FILE, but fputc() uses __FILE and ferror().

fputc(), do not reference any data stored in stdin and stdout.

- 6. fgetc(), gets a character from a file.
- 7. fgetwc()
- 8. fputwc()
- 9. __backspace(), moves the file pointer to the previous character.
- 10.__backspacewc().

Table 1-9 Input/output dependencies

High-level function	Low-level object									
	1	2	3	4	5	6	7	8	9	10
fgets	х	-	-	-	Х	Х	-	-	-	-
fgetws	х	-	-	-	-	-	X	-	-	-
fprintf	х	-	-	х	Х	-	-	-	-	-
fputs	х	-	-	X	-	-	-	-	-	-
fputws	Х	-	-	-	-	-	-	X	-	-
fread	Х	-	-	-	-	Х	-	-	-	-
fscanf	х	-	-	-	-	Х	-	-	х	-
fwprintf	х	-	-	-	Х	-	-	X	-	-
fwrite	X	-	-	X	-	-	-	-	-	-
fwscanf	х	-	-	-	-	-	X	-	-	х
getchar	Х	х	-	-	-	х	-	-	-	-
gets	X	Х	-	-	X	х	-	-	-	-
getwchar	X	X	-	-	-	-	X	-	-	-
perror	х	-	х	х	-	-	-	-	-	-
printf	х	-	х	х	х	-	-	-	-	-
putchar	Х	-	X	X	-	-	-	-	-	-

Table 1-9 Input/output dependencies (continued)

	Low-level object								
1	2	3	4	5	6	7	8	9	10
х	-	X	X	-	-	-	-	-	-
х	-	X	-	-	-	-	X	-	-
х	X	-	-	-	X	-	-	X	-
х	-	-	Х	Х	-	-	-	-	-
х	-	-	-	-	х	-	-	х	-
х	-	-	-	X	-	-	X	-	-
х	-	-	-	-	-	X	-	-	X
х	-	Х	Х	Х	-	-	-	-	-
х	Х	-	-	-	х	-	-	х	-
X	-	X	-	X	-	-	X	-	-
х	Х	-	-	-	-	х	-	-	X
х	-	х	-	х	-	-	х	-	-
х	X	-	-	-	-	x	-	-	X
	x x x x x x x x x x x x x x x x x x x	x - x x - x - x - x - x - x - x - x - x	x - x x - x x - - x - - x - - x - - x - x x - x x - x x - x x - x x - x x - x	X - X X X - - - X <	X - X X - X - - - <	X - X X - - X X - - - X X - - - X - - X X - - - - X - - - - X X -	X - X X - - - - X X - - - - - X X - - X - - X - - X - - - X - - - X - - X - - - - X - X - - - - - - - X - - - - - - - - X - - - - - - - - X - - - - - - - - X - - - - - - - - X - - - - - - - - - - - - - - - - - - - <td>X - X X -</td> <td>X - X - - - - X - - X - - X - - X - - X - - X - - - X - - - X - - - X - - - X - - - X - - - X - - - - X -</td>	X - X X -	X - X - - - - X - - X - - X - - X - - X - - X - - - X - - - X - - - X - - - X - - - X - - - X - - - - X -

------ Note ------

If you choose to re-implement fgetc(), fputc(), and __backspace(), be aware that fopen() and related functions use the ARM layout for the __FILE structure. You might also have to re-implement fopen() and related functions if you define your own version of __FILE.

Related concepts

- 1.14 The C library printf family of functions on page 1-69.
- 1.15 The C library scanf family of functions on page 1-70.
- 1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.
- 1.17 The C library functions fread(), fgets() and gets() on page 1-73.
- 1.18 Re-implementing __backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

Related information

ISO C Reference.

1.14 The C library printf family of functions

The printf family consists of _printf(), printf(), _fprintf(), tprintf(), and vfprintf().

All these functions use __FILE opaquely and depend only on the functions fputc() and ferror(). The functions _printf() and _fprintf() are identical to printf() and fprintf() except that they cannot format floating-point values.

The standard output functions of the form _printf(...) are equivalent to:

```
fprintf(& __stdout, ...)
where stdout has type FILE.
```

Related concepts

- 1.15 The C library scanf family of functions on page 1-70.
- 1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.
- 1.17 The C library functions fread(), fgets() and gets() on page 1-73.
- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.15 The C library scanf family of functions

The scanf() family consists of scanf() and fscanf().

These functions depend only on the functions fgetc(), __FILE, and __backspace().

The standard input function of the form scanf(...) is equivalent to:

```
fscanf(& __stdin, ...)
```

where __stdin is of type __FILE.

Related concepts

- 1.14 The C library printf family of functions on page 1-69.
- 1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.
- 1.17 The C library functions fread(), fgets() and gets() on page 1-73.
- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library

If you define your own version of __FILE, your own fputc() and ferror() functions, and the __stdout object, you can use all of the printf() family, fwrite(), fputs(), puts() and the C++ object std::cout unchanged from the library.

These examples show you how to do this. However, consider modifying the system I/O functions instead of these low-level library functions if you require real file handling.

You are not required to re-implement every function shown in these examples. Only re-implement the functions that are used in your application.

Retargeting printf()

```
#include <stdio.h>
struct __FILE
  int handle;
  /* Whatever you require here. If the only file you are using is */
/* standard output using printf() for debugging, no file handling */
  /* is required.
};
/* FILE is typedef'd in stdio.h. */
       _stdout;
FILE
int fputc(int ch, FILE *f)
  /* Your implementation of fputc(). */
  return ch;
int ferror(FILE *f)
  /* Your implementation of ferror(). */
  return 0;
void test(void)
  printf("Hello world\n");
```

— Note ———

Be aware of endianness with fputc(). fputc() takes an int parameter, but contains only a character. Whether the character is in the first or the last byte of the integer variable depends on the endianness. The following code sample avoids problems with endianness:

```
extern void sendchar(char *ch);
int fputc(int ch, FILE *f)
{
   /* example: write a character to an LCD */
   char tempch = ch; // temp char avoids endianness issue
   sendchar(&tempch); // sendchar(&ch) would not work everywhere
   return ch;
}
```

Retargeting cout

File 1: Re-implement any functions that require re-implementation.

```
#include <stdio.h>
namespace std {
    struct __FILE
     {
        int handle;
        /* Whatever you require here. If the only file you are using is */
        /* standard output using printf() for debugging, no file handling */
        /* is required. */
    };
    FILE __stdout;
    FILE __stdin;
    FILE __stderr;
    int fgetc(FILE *f)
```

```
/* Your implementation of fgetc(). */
int fputc(int c, FILE *stream)
 /* Your implementation of fputc(). */
int ferror(FILE *stream)
 /* Your implementation of ferror(). */
long int ftell(FILE *stream)
  /* Your implementation of ftell(). */
int fclose(FILE *f)
  /* Your implementation of fclose(). */
  return 0;
int fseek(FILE *f, long nPos, int nMode)
  /* Your implementation of fseek(). */
 return 0;
int fflush(FILE *f)
  /* Your implementation of fflush(). */
  return 0;
```

File 2: Print "Hello world" using your re-implemented functions.

```
#include <stdio.h>
#include <iostream>
using namespace std;
int main()
{
   cout << "Hello world\n";
   return 0;
}</pre>
```

By default, fread() and fwrite() call fast block input/output functions that are part of the ARM stream implementation. If you define your own __FILE structure instead of using the ARM stream implementation, fread() and fwrite() call fgetc() instead of calling the block input/output functions.

Related concepts

- 1.14 The C library printf family of functions on page 1-69.
- 1.15 The C library scanf family of functions on page 1-70.
- 1.17 The C library functions fread(), fgets() and gets() on page 1-73.
- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.17 The C library functions fread(), fgets() and gets()

The functions fread(), fgets(), and gets() are implemented as fast block input/output functions where possible.

These fast implementations are part of the ARM stream implementation and they bypass fgetc(). Where the fast implementation is not possible, they are implemented as a loop over fgetc() and ferror(). Each uses the FILE argument opaquely.

If you provide your own implementation of __FILE, __stdin (for gets()), fgetc(), and ferror(), you can use these functions, and the C++ object std::cin directly from the library.

Related concepts

- 1.14 The C library printf family of functions on page 1-69.
- 1.15 The C library scanf family of functions on page 1-70.
- 1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.
- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.
- 1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.18 Re-implementing __backspace() in the C library

The functionbackspace() is used by the scanf family of functions, and must be re-implemented if you retarget the stdio arrangements at the fgetc() level.
Note
Normally, you are not required to callbackspace() directly, unless you are implementing your own scanf-like function.
The syntax is:
<pre>intbackspace(FILE *stream);</pre>
backspace(stream) must only be called after reading a character from the stream. You must not call it after a write, a seek, or immediately after opening the file, for example. It returns to the stream the last character that was read from the stream, so that the same character can be read from the stream again by the next read operation. This means that a character that was read from the stream by scanf but that is not required (that is, it terminates the scanf operation) is read correctly by the next function that reads from the stream.
_backspace is separate from ungetc(). This is to guarantee that a single character can be pushed back after the scanf family of functions has finished.
The value returned bybackspace() is either 0 (success) or EOF (failure). It returns EOF only if used incorrectly, for example, if no characters have been read from the stream. When used correctly,

The interaction between backspace() and ungetc() is:

• If you apply __backspace() to a stream and then ungetc() a character into the same stream, subsequent calls to fgetc() must return first the character returned by ungetc(), and then the character returned by __backspace().

backspace() must always return 0, because the scanf family of functions do not check the error

- If you ungetc() a character back to a stream, then read it with fgetc(), and then backspace it, the next character read by fgetc() must be the same character that was returned to the stream. That is the __backspace() operation must cancel the effect of the fgetc() operation. However, another call to ungetc() after the call to __backspace() is not required to succeed.
- The situation where you ungetc() a character into a stream and then __backspace() another one immediately, with no intervening read, never arises. __backspace() must only be called after fgetc(), so this sequence of calls is illegal. If you are writing __backspace() implementations, you can assume that the ungetc() of a character into a stream followed immediately by a __backspace() with no intervening read, never occurs.

Related concepts

return.

1.14 The C library printf family of functions on page 1-69.

1.15 The C library scanf family of functions on page 1-70.

1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.

1.17 The C library functions fread(), fgets() and gets() on page 1-73.

1.19 Re-implementing backspacewc() in the C library on page 1-75.

1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.19 Re-implementing __backspacewc() in the C library

__backspacewc() is the wide-character equivalent of __backspace().

__backspacewc() behaves in the same way as __backspace() except that it pushes back the last wide character instead of a narrow character.

Related concepts

1.14 The C library printf family of functions on page 1-69.

1.15 The C library scanf family of functions on page 1-70.

1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.

1.17 The C library functions fread(), fgets() and gets() on page 1-73.

1.18 Re-implementing backspace() in the C library on page 1-74.

1.20 Redefining target-dependent system I/O functions in the C library on page 1-76.

Related references

1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.20 Redefining target-dependent system I/O functions in the C library

The default target-dependent I/O functions use semihosting. If any of these functions are redefined, then they must all be redefined.

The function prototypes are contained in rt_sys.h. These functions are called by the C standard I/O library functions. For example, _sys_open() is called by fopen() and freopen(). _sys_open() uses the strings __stdin_name, __stdout_name, and __stderr_name during C library initialization to identify which standard I/O device handle to return. You can leave their values as the default (:tt) if _sys_open() does not use them.

The following example shows you how to redefine the required functions for a device that supports writing but not reading.

Example of retargeting the system I/O functions

```
* These names are used during library initialization as the
 * file names opened for stdin, stdout, and stderr.

* As we define _sys_open() to always return the same file handle,

* these can be left as their default values.
const char __stdin_name[] = ":tt";
const char __stdout_name[] = ":tt";
const char __stderr_name[] = ":tt";
FILEHANDLE _sys_open(const char *name, int openmode)
  return 1; /* everything goes to the same output */
int _sys_close(FILEHANDLE fh)
  return 0;
int _sys_write(FILEHANDLE fh, const unsigned char *buf, unsigned len, int mode)
  your_device_write(buf, len);
  return 0;
int _sys_read(FILEHANDLE fh, unsigned char *buf,
                  unsigned len, int mode)
  return -1; /* not supported */
void _ttywrch(int ch)
  char c = ch;
  your_device_write(&c, 1);
int _sys_istty(FILEHANDLE fh)
  return 0; /* buffered output */
int sys seek(FILEHANDLE fh, long pos)
  return -1; /* not supported */
long _sys_flen(FILEHANDLE fh)
  return -1; /* not supported */
```

rt_sys.h defines the type FILEHANDLE. The value of FILEHANDLE is returned by _sys_open() and identifies an open file on the host system.

If the system I/O functions are redefined, both normal character I/O and wide character I/O work. That is, you are not required to do anything extra with these functions for wide character I/O to work.

Related concepts

1.14 The C library printf family of functions on page 1-69. 1.15 The C library scanf family of functions on page 1-70.

- 1.16 Redefining low-level library functions to enable direct use of high-level library functions in the C library on page 1-71.
- 1.17 The C library functions fread(), fgets() and gets() on page 1-73.
- 1.18 Re-implementing backspace() in the C library on page 1-74.
- 1.19 Re-implementing backspacewc() in the C library on page 1-75.

Related references

- 1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.
- 1.13 Target dependencies on low-level functions in the C and C++ libraries on page 1-67.

1.21 Tailoring non-input/output C library functions

In addition to tailoring input/output C library functions, many C library functions that are not input/output functions can also be tailored.

Implementation of these ISO standard functions depends entirely on the target operating system.

The default implementation of these functions is semihosted. That is, each function uses semihosting.

Related references

```
1.6.5 Direct semihosting C library function dependencies on page 1-34.
1.6.6 Indirect semihosting C library function dependencies on page 1-35.
4.3 clock() on page 4-131.
4.4 _clock_init() on page 4-132.
4.48 time() on page 4-178.
4.20 remove() on page 4-149.
4.21 rename() on page 4-150.
4.47 system() on page 4-177.
4.10 getenv() on page 4-138.
4.11 getenv init() on page 4-139.
```

1.22 Real-time integer division in the ARM libraries

The ARM library provides a real-time division routine and a standard division routine.

The standard division routine supplied with the ARM libraries provides good overall performance. However, the amount of time required to perform a division depends on the input values. For example, a division that generates a four-bit quotient might require only 12 cycles while a 32-bit quotient might require 96 cycles. Depending on your target, some applications require a faster worst-case cycle count at the expense of lower average performance. For this reason, the ARM library provides two divide routines.

The real-time routine:

- Always executes in fewer than 45 cycles.
- Is faster than the standard division routine for larger quotients.
- Is slower than the standard division routine for typical quotients.
- Returns the same results.
- Does not require any change in the surrounding code.

Note	
Real-time division	on is not available in the libraries for Cortex-M1 or Cortex-M0.
——— Note	
The Cortex-R4 a the library divide	nd Cortex-M3 processors support hardware floating-point divide, so they do not require routines.

Select the real-time divide routine using either of the following methods:

- IMPORT use realtime division from assembly language.
- asm(".global use realtime division\n") from C.

1.23 ISO C library implementation definition

Describes how the libraries fulfill the requirements of the ISO specification.

This section contains the following subsections:

- 1.23.1 How the ARM C library fulfills ISO C specification requirements on page 1-80.
- 1.23.2 mathlib error handling on page 1-81.
- 1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.
- 1.23.4 ISO-compliant C library input/output characteristics on page 1-82.
- 1.23.5 Standard C++ library implementation definition on page 1-84.
- 1.23.6 Standard C++ library implementation definition (Rogue Wave) on page 1-84.

1.23.1 How the ARM C library fulfills ISO C specification requirements

The ISO specification leaves some features to implementors, but requires that implementation choices be documented.

The implementation of the generic ARM C library in this respect is as follows:

- The macro NULL expands to the integer constant 0.
- If a program redefines a reserved external identifier, an error might occur when the program is linked with the standard libraries. If it is not linked with standard libraries, no error is diagnosed.
- The __aeabi_assert() function prints information on the failing diagnostic on stderr and then calls the abort() function:

***	assertion	failed:	expression,	file name,	line nu	ımber	
	—— Note						

The behavior of the assert macro depends on the conditions in operation at the most recent occurrence of #include <assert.h>. See 1.8.5 Program exit and the assert macro on page 1-47 for more information about the behavior of the assert macro.

- The following functions test for character values in the range EOF (-1) to 255 inclusive:
 - isalnum()
 - isalpha()
 - iscntrl()
 - islower()
 - isprint()
 - isupper()
 - ispunct()
- The fully POSIX-compliant functions remquo(), remquof() and remquol() return the remainder of the division of x by y and store the quotient of the division in the pointer *quo. An implementation-defined integer value defines the number of bits of the quotient that are stored. In the ARM C library, this value is set to 4.
- C99 behavior, with respect to mathlib error handling, is enabled by default.

Related concepts

1.23.4 ISO-compliant C library input/output characteristics on page 1-82. 1.8.5 Program exit and the assert macro on page 1-47.

Related references

1.23.2 mathlib error handling on page 1-81.

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.

1.23.6 Standard C++ library implementation definition (Rogue Wave) on page 1-84. 1.25 C and C++ library naming conventions on page 1-87.

1.23.2 mathlib error handling

The error handling of mathematical functions is consistent with Annex F of the ISO/IEC C99 standard.

Related concepts

1.23.4 ISO-compliant C library input/output characteristics on page 1-82.
1.23.1 How the ARM C library fulfills ISO C specification requirements on page 1-80.

Related references

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.

1.23.6 Standard C++ library implementation definition (Rogue Wave) on page 1-84.

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments

The signal() function supports a number of signals.

The following table shows the signals supported by the signal() function. It also shows which signals use an additional argument to give more information about the circumstance in which the signal was raised. The additional argument is given in the *type* parameter of __raise(). For example, division by floating-point zero results in a SIGFPE signal with a corresponding additional argument of FE_EX_DIVBYZERO.

Table 1-10 Signals supported by the signal() function

Signal	Number	Description	Additional argument
SIGABRT	1	Returned when the abort() function is called.	None
		The abort() function is triggered when there is an untrapped C++ exception, or when an assertion fails.	
SIGFPE	2	Signals any arithmetic exception, for example, division by zero. Used by hard and soft floating-point and by integer division.	A set of bits from FE_EX_INEXACT, FE_EX_UNDERFLOW, FE_EX_OVERFLOW, FE_EX_DIVBYZERO, FE_EX_INVALID, DIVBYZERO ^a
SIGILL	3	Illegal instruction.	None
SIGINT b	4 Attention request from user.		None
SIGSEGV b	5	Bad memory access.	None
SIGTERM b 6 Termination request.		Termination request.	None
SIGSTAK	7	Obsolete.	None
SIGRTRED	8	Redirection failed on a runtime library input/output stream.	Name of file or device being re-opened to redirect a standard stream
SIGRTMEM	9	Out of heap space during initialization or after corruption.	Size of failed request
SIGUSR1	10	User-defined.	User-defined
SIGUSR2	11	User-defined.	User-defined
SIGPVFN	12	A pure virtual function was called from C++.	-

a These constants are defined in fenv.h. FE_EX_DIVBYZERO is for floating-point division while DIVBYZERO is for integer division.

b The library never generates this signal. It is available for you to raise manually, if required.

Table 1-10 Signals supported by the signal() function (continued)

Signal	Number	Description	Additional argument
SIGCPPL	13	Not normally used.	-
reserved	15-31	Reserved.	Reserved
other	> 31	User-defined.	User-defined

Although **SIGSTAK** exists in signal.h, this signal is not generated by the C library and is considered obsolete.

A signal number greater than **SIGUSR2** can be passed through __raise() and caught by the default signal handler, but it cannot be caught by a handler registered using signal().

signal() returns an error code if you try to register a handler for a signal number greater than SIGUSR2.

The default handling of all recognized signals is to print a diagnostic message and call exit(). This default behavior applies at program startup and until you change it.



The IEEE 754 standard for floating-point processing states that the default action to an exception is to proceed without a trap. A raised exception in floating-point calculations does not, by default, generate **SIGFPE**. You can modify floating-point error handling by tailoring the functions and definitions in fenv.h. However you must compile these functions using a fully-conforming floating-point model, such as the armclang default.

For all the signals in the above table, when a signal occurs, if the handler points to a function, the equivalent of signal(sig, SIG_DFL) is executed before the call to the handler.

If the **SIGILL** signal is received by a handler specified to by the signal() function, the default handling is reset.

Related concepts

- 1.23.4 ISO-compliant C library input/output characteristics on page 1-82.
- 1.23.1 How the ARM C library fulfills ISO C specification requirements on page 1-80.
- 3.5.8 Exception types recognized by the ARM floating-point environment on page 3-123.

Related references

- 1.23.2 mathlib error handling on page 1-81.
- 1.23.6 Standard C++ library implementation definition (Rogue Wave) on page 1-84.
- 1.10 Modification of C library functions for error signaling, error handling, and program exit on page 1-58.
- 4.18 raise() on page 4-147.
- 4.28 rt raise() on page 4-157.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

1.23.4 ISO-compliant C library input/output characteristics

The generic ARM C library has defined input/output characteristics.

These input/output characteristics are as follows:

- The last line of a text stream does not require a terminating newline character.
- Space characters written out to a text stream immediately before a newline character do appear when read back in.
- No NUL characters are appended to a binary output stream.
- The file position indicator of an append mode stream is initially placed at the end of the file.
- A write to a text stream causes the associated file to be truncated beyond the point where the write occurred if this is the behavior of the device category of the file.
- If semihosting is used, the maximum number of open files is limited by the available target memory.
- · A zero-length file exists, that is, where no characters have been written by an output stream.
- A file can be opened many times for reading, but only once for writing or updating. A file cannot simultaneously be open for reading on one stream, and open for writing or updating on another.
- Local time zones and Daylight Saving Time are not implemented. The values returned indicate that the information is not available. For example, the gmtime() function always returns NULL.
- The status returned by exit() is the same value that was passed to it. For definitions of EXIT_SUCCESS and EXIT_FAILURE, see the header file stdlib.h. Semihosting, however, does not pass the status back to the execution environment.
- The error messages returned by the strerror() function are identical to those given by the perror() function
- If the size of area requested is zero, calloc() and realloc() return NULL.
- If the size of area requested is zero, malloc() returns a pointer to a zero-size block.
- abort() closes all open files and deletes all temporary files.
- fprintf() prints %p arguments in lowercase hexadecimal format as if a precision of 8 had been specified. If the variant form (%#p) is used, the number is preceded by the character @.
- fscanf() treats %p arguments exactly the same as %x arguments.
- fscanf() always treats the character "-" in a %...[...] argument as a literal character.
- ftell(), fsetpos() and fgetpos() set errno to the value of EDOM on failure.
- perror() generates the messages shown in the following table.

Table 1-11 perror() messages

Error	Message		
0	No error (errno = 0)		
EDOM	EDOM - function argument out of range		
ERANGE	ERANGE - function result not representable		
ESIGNUM	ESIGNUM - illegal signal number		
Others	Unknown error		

The following characteristics are unspecified in the ARM C library. They must be specified in an ISO-compliant implementation:

- The validity of a filename.
- Whether remove() can remove an open file.
- The effect of calling the rename() function when the new name already exists.
- The effect of calling getenv() (the default is to return NULL, no value available).
- The effect of calling system().
- The value returned by clock().

Related concepts

1.23.1 How the ARM C library fulfills ISO C specification requirements on page 1-80.

Related references

1.23.2 mathlib error handling on page 1-81.

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.

1.23.5 Standard C++ library implementation definition

The Standard C++ library in ARM Compiler 6 is implemented by libc++, with some limitations.

Support for C++11

ARM Compiler 6 libc++ libraries support the majority of C++11. The major limitations are that the Atomic operations library atomic > and the Thread support library <thread> are not supported.

Support for exceptions

The libc++ libraries support the use of C++ exceptions. The code-size and performance of C++ exceptions in libc++ has not been optimized.

Support for -fno-exceptions and libc++ is limited:

- ARM Compiler 6 does not contain variants of libc++ that are built with -fno-exceptions.

 Therefore, exceptions might be thrown from pre-built libc++ objects. If a C++ exception from libc++ propagates into code built with -fno-exceptions, then the program terminates.
- The parts of libc++ that are implemented in header files might be compiled with -fno-exceptions. When -fno-exceptions is used libc++ calls the assert macro instead of throwing an exception.

Note —	
These assert macros are removed if the macro NDEBUG is defined.	

Support for use of standard streams in static initializers

During static initialization, ARM Compiler 6 does not support the use of the standard streams cin, cout and cerr that are defined in <iostream>. The libc++ library does not guarantee that these streams are initialized before other static initializers are called.

Support for multithreading

ARM Compiler 6 does not support multithreading for libc++. The libc++ libraries have not been built with multithreading support, and both the Atomic operations library and the Thread support library are not supported.

Support for Array Construction and Delete helper functions

ARM Compiler 6 is not compatible with C++ objects from other compilers that use Array Construction and Delete helper functions.

Related information

The LLVM Compiler Infrastructure.

1.23.6 Standard C++ library implementation definition (Rogue Wave)

The ARM C++ library provides all of the library defined in the *ISO/IEC 14882 :1998(E) C++ Standard*, aside from some limitations.

For information on implementation-defined behavior that is defined in the Rogue Wave C++ library, see the Rogue Wave HTML documentation.

The Standard C++ library is distributed in binary form only.

The following table describes the most important features missing from the current release.

Table 1-12 Standard C++ library differences

Standard Implementation differences

locale

The locale message facet is not supported. It fails to open catalogs at runtime because the ARM C library does not support catopen() and catclose() through nl_types.h. One of two locale definitions can be selected at link time. Other locales can be created by user-redefinable functions.

Timezone Not supported by the ARM C library.

Thread safety

The following points summarize thread safety in the Rogue Wave C++ library:

- The function std::set_new_handler() is not thread-safe. This means that some forms of::operator new and::operator delete are not thread-safe with respect to std::set new handler():
 - The default C++ runtime library implementations of the following use malloc() and free() and are thread-safe with respect to each other. They are not thread-safe with respect to std::set new handler(). You are permitted to replace them:

```
::operator new(std::size_t)
::operator new[](std::size_t)
::operator new(std::size_t, const std::nothrow_t&)
::operator new[](std::size_t, const std::nothrow_t)
::operator delete(void*)
::operator delete[](void*)
::operator delete(void*, const std::nothrow_t&)
::operator delete[](void*, const std::nothrow_t&)
```

— The following placement forms are also thread-safe. You are not permitted to replace them:

```
::operator new(std::size_t, void*)
::operator new[](std::size_t, void*)
::operator delete(void*, void*)
::operator delete[](void*, void*)
```

- Construction and destruction of global objects are not thread-safe.
- Construction of local static objects can be made thread-safe if you re-implement the functions
 __cxa_guard_acquire(), __cxa_guard_release(), __cxa_guard_abort(), __cxa_atexit() and
 __aeabi_atexit() appropriately. For example, with appropriate re-implementation, the following
 construction of lsobj can be made thread-safe:

```
struct T { T(); };
void f() { static T lsobj; }
```

- Throwing an exception is thread-safe if any user constructors and destructors that get called are also thread-safe.
- The ARM C++ library uses the ARM C library. To use the ARM C++ library in a multithreaded environment, you must provide the same functions that you would be required to provide when using the ARM C library in a multithreaded environment.
- The libc++ library is not thread-safe.

Related information

Rogue Wave Standard C++ Library Documentation.

1.24 C library functions and extensions

The ARM C library is fully compliant with the ISO C99 library standard and provides a number of GNU, POSIX, BSD-derived, and -specific extensions.

The following table describes these extensions.

Table 1-13 C library extensions

Function	Header file definition	Extension
wcscasecmp()	wchar.h	GNU extension with ARM library support
wcsncasecmp()	wchar.h	GNU extension with ARM library support
wcstombs()	stdlib.h	POSIX extended functionality
<pre>posix_memalign()</pre>	stdlib.h	POSIX extended functionality
alloca()	alloca.h	Common nonstandard extension to many C libraries
strlcpy()	string.h	Common BSD-derived extension to many C libraries
strlcat()	string.h	Common BSD-derived extension to many C libraries
strcasecmp()	string.h	Standardized by POSIX
strncasecmp()	string.h	Standardized by POSIX
_fisatty()	stdio.h	Specific to
heapstats()	stdlib.h	Specific to
heapvalid()	stdlib.h	Specific to

Related references

- 4.54 wcscasecmp() on page 4-184.
- 4.55 wcsncasecmp() on page 4-185.
- 4.56 wcstombs() on page 4-186.
- 4.2 alloca() on page 4-130.
- 4.34 strlcat() on page 4-164.
- 4.35 strlcpy() on page 4-165.
- 4.32 strcasecmp() on page 4-162.
- 4.33 strncasecmp() on page 4-163.
- 4.8 fisatty() on page 4-136.
- 4.12 heapstats() on page 4-140.
- 4.13 heapvalid() on page 4-141.

1.25 C and C++ library naming conventions

The library filename identifies how the variant was built. - Note The library naming convention described in this documentation applies to the current release of the ARM compilation tools. Do not rely on C and C++ library names. They might change in future releases. Normally, you do not have to list any of the C and C++ libraries explicitly on the linker command line. The ARM linker automatically selects the correct C or C++ libraries to use, and it might use several, based on the accumulation of the object attributes. The values for the fields of the filename, and the relevant build options are: root/prefix_arch[fpu][entrant][enum][wchar].endian root armlib An ARM C library. cpplib An ARM C++ library. libcxx A libc++ library. prefix c ISO C and C++ basic runtime support. libcpp The libc++ library. libcppabi The libc++abi runtime library. срр Rogue Wave C++ library. cpprt The ARM C++ runtime libraries. IEEE-compliant library with a fixed rounding mode (round to nearest) and no inexact exceptions. fj IEEE-compliant library with a fixed rounding mode (round to nearest) and no exceptions. fz Behaves like the fj library, but additionally flushes denormals and infinities to zero. This library behaves like the ARM VFP in Fast mode. This is the default. g IEEE-compliant library with configurable rounding mode and all IEEE exceptions. h Compiler support (helper function) library. m Transcendental math functions. mс

Non ISO C-compliant ISO C micro-library basic runtime support.

	mf	Non IEEE 754 floating-point compliant micro-library support.
arch		
	4	An A32 only library for use with ARMv4.
	t	An A32/T32 interworking library for use with ARMv4T.
	5	An A32/T32 interworking library for use with ARMv5T and later.
	W	A T32 only library for use with ARMv6-M.
	р	A T32 only library for use with ARMv7-M.
	2	A combined A32 and T32 library for use with Cortex-A and Cortex-R series processors. You can prevent this library being selected using the linker optionno_thumb2_library.
	8	An A32/T32 interworking library for use with ARMv8, AArch32 state.
	0	An A64 library for use with ARMv8, AArch64 state.
fpu		
	m	A variant of the library for processors that have single-precision hardware floating-
	V	point only, such as Cortex-M4. Uses VFP instruction set.
	S	Soft VFP. Note ———
		If none of v, m, or s are present in a library name, the library provides no floating-point support.
entrai	nt	
	e f	Position-independent access to static data.
	'	Not supported. Note ———
		Position independence is only supported in AArch32 state. If both e and f are not present in a library name, the library uses position-dependent access to static data.
enum		
	n	Compatible with the default compiler option, -fno-short-enums.
wchar		• • •

u Indicates the size of wchar_t.When present, the library is compatible with the compiler option, -fno-short-wchar. Otherwise, it is compatible with -fshort-wchar. endian

Little-endian.

Big-endian.

For example:

armlib/c_4.b
cpplib/cpprt_5f.l

Not all variant/name combinations are valid. See the armlib and cpplib directories for the libraries that are supplied with the ARM Compiler.

The linker command-line option --info libraries provides information on every library that is automatically selected for the link stage.

Related information

- Note

 $\hbox{\it --info=topic[,topic,...] linker option.}$

--thumb2 library linker option.

1.26 Using macro__ARM_WCHAR_NO_IO to disable FILE declaration and wide I/O function prototypes

In strict C/C++ mode, the header files wchar.h and cwchar do not declare the FILE type. You can also define the macro __ARM_WCHAR_NO_IO to cause these header files not to declare FILE or the wide I/O function prototypes.

Declaring the FILE type can lead to better consistency in debug information.

Chapter 2 **The ARM C Micro-library**

Describes microlib, the C micro-library.

It contains the following sections:

- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.
- 2.6 Configuring the stack and heap for use with microlib on page 2-99.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.
- 2.8 Tailoring the microlib input/output functions on page 2-101.

2.1 About microlib

Microlib is an alternative library to the default C library. It is intended for use with deeply embedded applications that must fit into extremely small memory footprints.

These applications do not run under an operating system.



- Microlib does not attempt to be an ISO C-compliant library.
- Microlib has no support for AArch64 execution state.

Microlib is highly optimized for small code size. It has less functionality than the default C library and some ISO C features are completely missing. Some library functions are also slower.

Functions in microlib are responsible for:

- Creating an environment that a C program can execute in. This includes:
 - Creating a stack.
 - Creating a heap, if required.
 - Initializing the parts of the library the program uses.
- Starting execution by calling main().

Related concepts

- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

2.8 Tailoring the microlib input/output functions on page 2-101.

2.2 Differences between microlib and the default C library

There are a number of differences between microlib and the default C library.

The main differences are:

- Microlib is not compliant with the ISO C library standard. Some ISO features are not supported and others have less functionality.
- Microlib is not compliant with the IEEE 754 standard for binary floating-point arithmetic.
- Microlib is highly optimized for small code size.
- Locales are not configurable. The default C locale is the only one available.
- main() must not be declared to take arguments and must not return. In main, argc and argv parameters are undefined and cannot be used to access command-line arguments.
- Microlib provides limited support for C99 functions. Specifically, microlib does not support the following C99 functions:
 - <fenv.h> functions:

feclearexcept fegetround fesetenv fetestexcept	fegetenv feholdexcept fesetexceptflag feupdateenv	fegetexceptflag feraiseexcept fesetround	
---	--	--	--

— Wide characters in general:

— Auxiliary <math.h> functions:

ilogb	ilogbf	ilogbl
lgamma	lgammaf	lgammal
logb	logbf	logbl
nextafter	nextafterf	nextafterl
nexttoward	nexttowardf	nexttowardl

— Functions relating to program startup and shutdown and other OS interaction:

```
_Exit atexit exit
system time
```

- Microlib does not support C++.
- Microlib does not support operating system functions.
- Microlib does not support position-independent code.
- Microlib does not provide mutex locks to guard against code that is not thread safe.
- Microlib does not support wide characters or multibyte strings.
- Microlib does not support selectable one or two region memory models as the standard library (stdlib) does. Microlib provides only the two region memory model with separate stack and heap regions.
- Microlib does not support the bit-aligned memory functions _membitcpy[b|h|w][b|1]() and membitmove[b|h|w][b|1]().
- Microlib can be used only with the armclang command-line option -ffast-math.
- The level of ANSI C stdio support that is provided can be controlled with asm(".global use full stdio\n").

- asm(".global __use_smaller_memcpy\n") selects a smaller, but slower, version of memcpy().
- setvbuf() and setbuf() always fail because all streams are unbuffered.
- feof() and ferror() always return 0 because the error and EOF indicators are not supported.
- Microlib has no support in AArch64 state.

Related concepts

- 2.1 About microlib on page 2-92.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

2.8 Tailoring the microlib input/output functions on page 2-101.

2.3 Library heap usage requirements of microlib

Library heap usage requirements for microlib differ to those of standardlib.

The differences are:

- The size of heap memory allocated for fopen() is 20 bytes for the FILE structure.
- No buffer is ever allocated.

You must not declare main() to take arguments if you are using microlib.

_____ Note _____

The size of heap memory allocated for fopen() might change in future releases.

Related concepts

- 1.11.1 Library heap usage requirements of the ARM C and C++ libraries on page 1-59.
- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

2.8 Tailoring the microlib input/output functions on page 2-101.

2.4 ISO C features missing from microlib

Microlib does not support all ISO C90 features.

Major ISO C90 features not supported by microlib are:

Wide character and multibyte support

All functions dealing with wide characters or multibyte strings are not supported by microlib. A link error is generated if these are used. For example, mbtowc(), wctomb(), mbstowcs() and wcstombs(). All functions defined in Normative Addendum 1 are not supported by microlib.

Operating system interaction

Almost all functions that interact with an operating system are not supported by microlib. For example, abort(), exit(), atexit(), assert(), time(), system() and getenv(). An exception is clock(). A minimal implementation of clock() has been provided, which returns only -1, not the elapsed time. You may reimplement clock() (and _clock_init(), which it needs), if required.

File I/O

By default, all the stdio functions that interact with a file pointer return an error if called. The only exceptions to this are the three standard streams stdin, stdout and stderr. You can change this behavior using asm(".global __use_full_stdio\n"). Use of this

You can change this behavior using asm(".global __use_full_stdio\n"). Use of this pragma provides a microlib version of stdio that supports ANSI C, with only the following exceptions:

- The error and EOF indicators are not supported, so feof() and ferror() return 0.
- All streams are unbuffered, so setvbuf() and setbuf() fail.

Configurable locale

The default C locale is the only one available.

Signals

The functions signal() and raise() are provided but microlib does not generate signals. The only exception to this is if the program explicitly calls raise().

Floating-point support

Floating-point support diverges from IEEE 754 in the following ways, but uses the same data formats and matches IEEE 754 in operations involving only normalized numbers:

- Operations involving NaNs, infinities or input denormals produce indeterminate results. Operations that produce a result that is nonzero but very small in value, return zero.
- IEEE exceptions cannot be flagged by microlib, and there is no fp_status() register in microlib.
- The sign of zero is not treated as significant by microlib, and zeroes that are output from microlib floating-point arithmetic have an *unknown* sign bit.
- · Only the default rounding mode is supported.

Position independent and thread safe code

Microlib has no reentrant variant. Microlib does not provide mutex locks to guard against code that is not thread safe. Use of microlib is not compatible with position independent compilation modes

Command-line arguments

In main, argc and argv parameters are undefined and cannot be used to access command-line arguments.

Related concepts

- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.5 Building an application with microlib on page 2-98.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

- 2.8 Tailoring the microlib input/output functions on page 2-101.
- 1.6.7 C library API definitions for targeting a different environment on page 1-36.
- 1.7.1 Building an application without the C library on page 1-38.
- 4.3 clock() on page 4-131.
- 4.4 clock init() on page 4-132.

2.5 Building an application with microlib

To build a program using microlib, you must use the command-line option --library_type=microlib. This option can be used by the compiler, assembler or linker.

Use --library type=microlib with the linker to override all other options.

Compiler option

```
armclang --target arm-arm-none-eabi -march=armv8-a --library_type=microlib -c main.c armclang --target arm-arm-none-eabi -march=armv8-a -c extra.c armlink --cpu=8-A.32 -o image.axf main.o extra.o
```

Specifying --library_type=microlib when compiling main.c results in an object file containing an attribute that asks the linker to use microlib. Compiling extra.c with --library_type=microlib is unnecessary, because the request to link against microlib exists in the object file generated by compiling main.c.

Assembler option

```
armclang --target arm-arm-none-eabi -march=armv8-a -c main.c armclang --target arm-arm-none-eabi -march=armv8-a -c extra.c armasm --cpu=8-A.32 --library_type=microlib more.s armlink --cpu=8-A.32 -o image.axf main.o extra.o more.o
```

The request to the linker to use microlib is made as a result of assembling more.s with -- library type=microlib.

Linker option

```
armclang --target arm-arm-none-eabi -march=armv8-a -c main.c armclang --target arm-arm-none-eabi -march=armv8-a -c extra.c armlink --cpu=8-A.32 --library_type=microlib -o image.axf main.o extra.o
```

Neither object file contains the attribute requesting that the linker link against microlib, so the linker selects microlib as a result of being explicitly asked to do so on the command line.

Related concepts

- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

2.8 Tailoring the microlib input/output functions on page 2-101.

Related information

```
--library_type=lib assembler option.
input-file-list linker option.
--library type=lib linker option.
```

2.6 Configuring the stack and heap for use with microlib

To use microlib, you must specify an initial pointer for the stack. You can specify the initial pointer in a scatter file or using the __initial_sp symbol.

To use the heap functions, for example, malloc(), calloc(), realloc() and free(), you must specify the location and size of the heap region.

To configure the stack and heap for use with microlib, use either of the following methods:

- Define the symbol __initial_sp to point to the top of the stack. If using the heap, also define symbols __heap_base and __heap_limit.
 - initial sp must be aligned to a multiple of eight bytes.
 - __heap_limit must point to the byte beyond the last byte in the heap region.
- In a scatter file, either:
 - Define ARM LIB STACK and ARM LIB HEAP regions.
 - If you do not intend to use the heap, only define an ARM_LIB_STACK region.
 - Define an ARM LIB STACKHEAP region.

If you define an ARM_LIB_STACKHEAP region, the stack starts at the top of that region. The heap starts at the bottom.

Examples

To set up the initial stack and heap pointers using armasm assembly language:

```
.global __initial_sp
.equ __initial_sp, 0x10000 ; top of the stack
    .global __heap_base
.equ __heap_base, 0x400000 ; start of the heap
    .global __heap_limit
.equ __heap_limit, 0x800000 ; end of the heap
```

To set up the initial stack pointer using inline assembler in C.

To set up the heap pointer using inline assembler in C.

Related concepts

- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.
- 1.11.3 Stack pointer initialization and heap bounds on page 1-61.

Related references

2.8 Tailoring the microlib input/output functions on page 2-101.

Related information

About scatter-loading.

2.7 Entering and exiting programs linked with microlib

Microlib requires a main() function that takes no arguments and never returns.

Use main() to begin your program. Do not declare main() to take arguments. Microlib does not support command-line arguments from an operating system.

Your program must not return from main(). This is because microlib does not contain any code to handle exit from main(). Microlib does not support programs that call exit().

You can ensure that your main() function does not return, by inserting an endless loop at the end of the function. For example:

```
void main()
{
    ...
    while (1); // endless loop to prevent return from main()
}
```

Related concepts

- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

2.8 Tailoring the microlib input/output functions on page 2-101.

2.8 Tailoring the microlib input/output functions

Microlib provides a limited stdio subsystem. To use high-level I/O functions you must reimplement the base I/O functions.

Microlib provides a limited stdio subsystem that supports unbuffered stdin, stdout and stderr only. This enables you to use printf() for displaying diagnostic messages from your application.

To use high-level I/O functions you must provide your own implementation of the following base functions so that they work with your own I/O device.

Related concepts

- 2.1 About microlib on page 2-92.
- 2.2 Differences between microlib and the default C library on page 2-93.
- 2.3 Library heap usage requirements of microlib on page 2-95.
- 2.4 ISO C features missing from microlib on page 2-96.
- 2.5 Building an application with microlib on page 2-98.
- 2.7 Entering and exiting programs linked with microlib on page 2-100.
- 1.18 Re-implementing backspace() in the C library on page 1-74.

Related tasks

2.6 Configuring the stack and heap for use with microlib on page 2-99.

Related references

1.12 Tailoring input/output functions in the C and C++ libraries on page 1-66.

Chapter 3 Floating-point Support

Describes ARM support for floating-point computations.

It contains the following sections:

- 3.1 About floating-point support on page 3-103.
- 3.2 Controlling the ARM floating-point environment on page 3-104.
- 3.3 Using C99 signaling NaNs provided by mathlib (WANT SNAN) on page 3-116.
- 3.4 mathlib double and single-precision floating-point functions on page 3-117.
- *3.5 IEEE 754 arithmetic* on page 3-118.

3.1 About floating-point support

The ARM floating-point environment is an implementation of the IEEE 754-1985 standard for binary
floating-point arithmetic.
Note
In ARMv8, floating-point hardware is integral to the architecture. Software floating-point is supported
for AArch32 state, but is not supported for AArch64 state.

An ARM system might have:

- A VFP coprocessor.
- No floating-point hardware.

If you compile for a system with a hardware VFP coprocessor, the ARM compiler makes use of it. If you compile for a system without a coprocessor, the compiler implements the computations in software. For example, the compiler option -mfloat-abi=hard selects a hardware VFP coprocessor and the option -mfloat-abi=soft specifies that arithmetic operations are to be performed in software, without the use of any coprocessor instructions.

Related concepts

3.5 IEEE 754 arithmetic on page 3-118.

3.2 Controlling the ARM floating-point environment

The ARM compilation tools supply several different interfaces to the floating-point environment, for compatibility and porting ease.

These interfaces enable you to change the rounding mode, enable and disable trapping of exceptions, and install your own custom exception trap handlers.

_____Note _____

The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

This section contains the following subsections:

- 3.2.1 Floating-point functions for compatibility with Microsoft products on page 3-104.
- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
- 3.2.3 C99 rounding mode and floating-point exception macros on page 3-105.
- 3.2.4 Exception flag handling on page 3-106.
- 3.2.5 Functions for handling rounding modes on page 3-106.
- 3.2.6 Functions for saving and restoring the whole floating-point environment on page 3-107.
- 3.2.7 Functions for temporarily disabling exceptions on page 3-107.
- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.11 Exception trap handling by signals on page 3-114.

3.2.1 Floating-point functions for compatibility with Microsoft products

Functions defined in float.h give compatibility with Microsoft products to ease porting of floating-point code to the ARM architecture.

These functions require you to select a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

Related concepts

3.2 Controlling the ARM floating-point environment on page 3-104.

Related references

- 5.1 _clearfp() on page 5-192.
- 5.2 controlfp() on page 5-193.
- 5.8 _statusfp() on page 5-203.

3.2.2 C99-compatible functions for controlling the ARM floating-point environment

The compiler supports all functions defined in the C99 standard, and functions that are not C99-standard.

Note

The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

Note

Note

The following functionality requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

The C99-compatible functions are the only interface that enables you to install custom exception trap handlers with the ability to define your own return value. All the function prototypes, data types, and macros for this functionality are defined in fenv.h.

C99 defines two data types, fenv_t and fexcept_t. The C99 standard does not give information about these types, so for portable code you must treat them as opaque. The compiler defines them to be structure types.

The type fenv_t is defined to hold all the information about the current floating-point environment. This comprises:

- The rounding mode.
- The exception sticky flags.
- Whether each exception is masked.
- What handlers are installed, if any.

The type fexcept_t is defined to hold all the information relevant to a given set of exceptions.

Related concepts

- 3.2 Controlling the ARM floating-point environment on page 3-104.
- 3.2.4 Exception flag handling on page 3-106.
- 3.2.5 Functions for handling rounding modes on page 3-106.
- 3.2.6 Functions for saving and restoring the whole floating-point environment on page 3-107.
- 3.2.7 Functions for temporarily disabling exceptions on page 3-107.
- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.11 Exception trap handling by signals on page 3-114.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.2.3 C99 rounding mode and floating-point exception macros on page 3-105.
- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.

3.2.3 C99 rounding mode and floating-point exception macros

C99 defines a macro for each rounding mode and each exception

Note

The following functionality requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

The C99 rounding mode and exception macros are:

- FE DIVBYZERO
- FE INEXACT
- FE_INVALID
- FE_OVERFLOW
- FE_UNDERFLOW
- FE_ALL_EXCEPT
- FE_DOWNWARD
- FE_TONEAREST
- FE_TOWARDZERO
- FE UPWARD

The exception macros are bit fields. The macro FE_ALL_EXCEPT is the bitwise OR of all of them.

Related concepts

3.2.5 Functions for handling rounding modes on page 3-106.

Related references

3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.

3.2.4 Exception flag handling

	information about a given exception.
	Note
	The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targetimes.
	Note
	The following functionality requires a floating-point model that supports exceptions. In ARM Comes this is enabled by default, and is disabled by armclang command-line options such as -ffast-ma
	C99 defines these functions as follows:
,	<pre>void feclearexcept(int excepts);</pre>
	<pre>int fetestexcept(int excepts);</pre>
,	<pre>void feraiseexcept(int excepts);</pre>
	The feclearexcept() function clears the sticky flags for the given exceptions. The fetestexcept function returns the bitwise OR of the sticky flags for the given exceptions, so that if the Overflow was set but the Underflow flag was not, then calling fetestexcept(FE_OVERFLOW FE_UNDERFLOW) would return FE_OVERFLOW.
	The feraiseexcept() function raises the given exceptions, in unspecified order. If an exception transled for an exception raised this way, it is called.
1	C99 also provides functions to save and restore all information about a given exception. This includes the sticky flag, whether the exception is trapped, and the address of the trap handler, if any. These functions are:
,	<pre>void fegetexceptflag(fexcept_t *flagp, int excepts);</pre>
,	<pre>void fesetexceptflag(const fexcept_t *flagp, int excepts);</pre>
	The fegetexceptflag() function copies all the information relating to the given exceptions into the fexcept_t variable provided. The fesetexceptflag() function copies all the information relating the given exceptions from the fexcept_t variable into the current floating-point environment. Note ————Note
	You can use fesetexceptflag() to set the sticky flag of a trapped exception to 1 without calling the trap handler, whereas feraiseexcept() calls the trap handler for any trapped exception.
	Related references
	3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
(ctions for handling rounding modes
,	The fegetround() and fesetround functions let you get and set the current rounding mode.
	Note
	The following functionality requires a floating-point model that supports exceptions. In ARM Composition is enabled by default, and is disabled by armclang command-line options such as -ffast-ma

3.2.5

```
int fegetround(void);
int fesetround(int round);
```

The fegetround() function returns the current rounding mode. The current rounding mode has a value equal to one of the C99 rounding mode macros or exceptions.

The fesetround() function sets the current rounding mode to the value provided. fesetround() returns zero for success, or nonzero if its argument is not a valid rounding mode.

Related references

- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
- 3.2.3 C99 rounding mode and floating-point exception macros on page 3-105.

3.2.6 Functions for saving and restoring the whole floating-point environment

The fegetenv and fesetenv functions let you save and restore the entire floating-point environment.

Note

The following functionality requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

C99 defines these functions as follows:

void fegetenv(fenv t *envp);

The fegetenv() function stores the current state of the floating-point environment into the fenv_t variable provided. The fesetenv() function restores the environment from the variable provided.

Like fesetexceptflag(), fesetenv() does not call trap handlers when it sets the sticky flags for trapped exceptions.

Related references

3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.

3.2.7 Functions for temporarily disabling exceptions

void fesetenv(const fenv t *envp);

The feholdexcept and feupdateenv functions let you temporarily disable exception trapping.
Note
The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.
Note
The following functionality requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

These functions let you avoid risking exception traps when executing code that might cause exceptions. This is useful when, for example, trapped exceptions are using the ARM default behavior. The default is to cause **SIGFPE** and terminate the application.

```
int feholdexcept(fenv_t *envp);
void feupdateenv(const fenv_t *envp);
```

The feholdexcept() function saves the current floating-point environment in the fenv_t variable provided, sets all exceptions to be untrapped, and clears all the exception sticky flags. You can then execute code that might cause unwanted exceptions, and make sure the sticky flags for those exceptions

are cleared. Then you can call feupdateenv(). This restores any exception traps and calls them if necessary. For example, suppose you have a function, frob(), that might cause the Underflow or Invalid Operation exceptions (assuming both exceptions are trapped). You are not interested in Underflow, but you want to know if an invalid operation is attempted. You can implement the following code to do this:

```
fenv_t env;
feholdexcept(&env);
frob();
feclearexcept(FE_UNDERFLOW);
feupdateenv(&env);
```

Then, if the frob() function raises Underflow, it is cleared again by feclearexcept(), so no trap occurs when feupdateenv() is called. However, if frob() raises Invalid Operation, the sticky flag is set when feupdateenv() is called, so the trap handler is invoked.

This mechanism is provided by C99 because C99 specifies no way to change exception trapping for individual exceptions. A better method is to use __ieee_status() to disable the Underflow trap while leaving the Invalid Operation trap enabled. This has the advantage that the Invalid Operation trap handler is provided with all the information about the invalid operation (that is, what operation was being performed, and on what data), and can invent a result for the operation. Using the C99 method, the Invalid Operation trap handler is called after the fact, receives no information about the cause of the exception, and is called too late to provide a substitute result.

Related references

3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104. 5.5 ieee status() on page 5-198.

3.2.8 ARM floating-point compiler extensions to the C99 interface

The ARM C library provides some extensions to the C99 interface to enable it to do everything that the ARM floating-point environment is capable of. This includes trapping and untrapping individual exception types, and installing custom trap handlers.

Note	
The ARM Compiler toolchain does not support	floating-point exception trapping for AArch64 targets.
Note	
The following functionality requires a floating-r	point model that supports exceptions. In ARM Compiler
6 this is enabled by default, and is disabled by a	rmclang command-line options such as -ffast-math.

The types fenv_t and fexcept_t are not defined by C99 to be anything in particular. The ARM compiler defines them both to be the same structure type.

In AArch32 state, fenv t and fexcept t have the following structure:

```
typedef struct{
   unsigned __statusword;
   __ieee_handler_t __invalid_handler;
   __ieee_handler_t __divbyzero_handler;
   __ieee_handler_t __overflow_handler;
   __ieee_handler_t __underflow_handler;
   __ieee_handler_t __inexact_handler;
} fenv_t, fexcept_t;
```

The members of this structure are:

- __statusword, the same status variable that the function __ieee_status() sees, laid out in the same format.
- Five function pointers giving the address of the trap handler for each exception. By default, each is NULL. This means that if the exception is trapped, the default exception trap action happens. The default is to cause a **SIGFPE** signal.

In AArch64 state, fenv t and fexcept t have the following structure:

```
typedef struct{
   unsigned __statusword;
} fenv_t, fexcept_t;
```

Related concepts


- 3.2 Controlling the ARM floating-point environment on page 3-104.
- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.11 Exception trap handling by signals on page 3-114.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- $\it 3.2.2~C99-compatible~functions~for~controlling~the~ARM~floating-point~environment~on~page~3-104.$
- 5.5 ieee status() on page 5-198.

3.2.9 Writing a custom exception trap handler

Custom exception trap handlers let you override the default exception handling behavior. For example, when converting Fortran code you might want to override the division by zero exception to return 1 rather than an invalid operation exception.



If you want to install a custom exception trap handler, declare it as a function like this:

The value returned from this function is of type __ieee_value_t and is used as the result of the operation that caused the exception.

The function must be declared softfp in order to be usable as a handler.

The parameters to this function are:

op1, op2

These specify the operands, or the intermediate result, for the operation that caused the exception:

- For the Invalid Operation and Divide by Zero exceptions, the original operands are supplied.
- For the Inexact Result exception, all that is supplied is the ordinary result that would have been returned anyway. This is provided in op1.
- For the Overflow exception, an intermediate result is provided. This result is calculated by working out what the operation would have returned if the exponent range had been big enough, and then adjusting the exponent so that it fits in the format. The exponent is adjusted by 192 (0xC0) in single-precision, and by 1536 (0x600) in double-precision.

If Overflow happens when converting a **double** to a **float**, the result is supplied in **double** format, rounded to single-precision, with the exponent biased by 192.

• For the Underflow exception, a similar intermediate result is produced, but the bias value is added to the exponent instead of being subtracted. The edata parameter also contains a flag to show whether the intermediate result has had to be rounded up, down, or not at all.

The type __ieee_value_t is defined as a union of all the possible types that an operand can be passed as:

----- Note -----

If you do not compile with --strict, and you have code that used the older definition of __ieee_value_t which named the fields differently, your older code still works. See the file fenv.h for more information.

edata

This contains flags that give information about the exception that occurred, and what operation was being performed. (The type __ieee_edata_t is a synonym for unsigned int.)

edata flags for exception trap handler

The flags contained in edata are:

```
edata & FE_EX_RDIR
```

This is nonzero if the intermediate result in Underflow was rounded down, and 0 if it was rounded up or not rounded. (The difference between the last two is given in the Inexact Result bit.) This bit is meaningless for any other type of exception.

edata & FE EX exception

This is nonzero if the given exception (INVALID, DIVBYZERO, OVERFLOW, UNDERFLOW, or INEXACT) occurred. This enables you to:

- Use the same handler function for more than one exception type (the function can test these bits to tell what exception it is supposed to handle).
- Determine whether Overflow and Underflow intermediate results have been rounded or are exact.

Because the FE_EX_INEXACT bit can be set in combination with either FE_EX_OVERFLOW or FE_EX_UNDERFLOW, you must determine the type of exception that actually occurred by testing Overflow and Underflow before testing Inexact.

edata & FE EX FLUSHZERO

This is nonzero if the FZ bit was set when the operation was performed.

edata & FE EX ROUND MASK

This gives the rounding mode that applies to the operation. This is normally the same as the current rounding mode, unless the operation that caused the exception was a routine such as _ffix, that always rounds toward zero. The available rounding mode values are FE_EX_ROUND_NEAREST, FE_EX_ROUND_PLUSINF, FE_EX_ROUND_MINUSINF and FE_EX_ROUND_ZERO.

edata & FE EX INTYPE MASK

This gives the type of the operands to the function, as one of the type values shown in the following table.

Table 3-1 FE_EX_INTYPE_MASK operand type flags

Flag	Operand type
FE_EX_INTYPE_FLOAT	float
FE_EX_INTYPE_DOUBLE	double
FE_EX_INTYPE_FD	float double
FE_EX_INTYPE_DF	double float
FE_EX_INTYPE_HALF	short
FE_EX_INTYPE_INT	int
FE_EX_INTYPE_UINT	unsigned int
FE_EX_INTYPE_LONGLONG	long long
FE_EX_INTYPE_ULONGLONG	unsigned long long

edata & FE EX OUTTYPE MASK

This gives the type of the operands to the function, as one of the type values shown in the following table.

Table 3-2 FE_EX_OUTTYPE_MASK operand type flags

Flag	Operand type
FE_EX_OUTTYPE_FLOAT	float
FE_EX_OUTTYPE_DOUBLE	double
FE_EX_OUTTYPE_HALF	short
FE_EX_OUTTYPE_INT	int
FE_EX_OUTTYPE_UINT	unsigned int
FE_EX_OUTTYPE_LONGLONG	long long
FE_EX_OUTTYPE_ULONGLONG	unsigned long long

edata & FE EX FN MASK

This gives the nature of the operation that caused the exception, as one of the operation codes shown in the following table.

Table 3-3 FE_EX_FN_MASK operation type flags

Flag	Operation type
FE_EX_FN_ADD	Addition.
FE_EX_FN_SUB	Subtraction.
FE_EX_FN_MUL	Multiplication.
FE_EX_FN_DIV	Division.
FE_EX_FN_REM	Remainder.
FE_EX_FN_RND	Round to integer.
FE_EX_FN_SQRT	Square root.
FE_EX_FN_CMP	Compare.
FE_EX_FN_CVT	Convert between formats.
FE_EX_FN_LOGB	Exponent fetching.
FE_EX_FN_SCALBN	Scaling. Note ——Note —— The FE_EX_INTYPE_MASK flag only specifies the type of the first operand. The second operand is always an int.
FE_EX_FN_NEXTAFTER	Next representable number. Note Note Both operands are the same type. Calls to nexttoward cause the value of the second operand to change to a value that is of the same type as the first operand. This does not affect the result.
FE_EX_FN_RAISE	The exception was raised explicitly, by feraiseexcept() or feupdateenv(). In this case, almost nothing in the edata word is valid.

When the operation is a comparison, the result must be returned as if it were an **int**, and must be one of the four values shown in the following table.

Input and output types are the same for all operations except Compare and Convert.

Table 3-4 FE_EX_CMPRET_MASK comparison type flags

Flag	Comparison
FE_EX_CMPRET_LESS	op1 is less than op2
FE_EX_CMPRET_EQUAL	op1 is equal to op2
FE_EX_CMPRET_GREATER	op1 is greater than op2
FE_EX_CMPRET_UNORDERED	op1 and op2 are not comparable

Related concepts

3.2.10 Example of a custom exception handler on page 3-113.

3.2.11 Exception trap handling by signals on page 3-114.

- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.
- 3.2 Controlling the ARM floating-point environment on page 3-104.

Related references

- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
- 5.5 ieee status() on page 5-198.

3.2.10 Example of a custom exception handler

invalid operation exception.
Note
The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.
Note
The following functionality requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

This example exception trap handler overrides the division by zero exception to return 1 rather than an

Suppose you are converting some Fortran code into C. The Fortran numerical standard requires 0 divided by 0 to be 1, whereas IEEE 754 defines 0 divided by 0 to be an Invalid Operation and so by default it returns a quiet NaN. The Fortran code is likely to rely on this behavior, and rather than modifying the code, it is probably easier to make 0 divided by 0 return 1.

After the handler is installed, dividing 0.0 by 0.0 returns 1.0.

Custom exception handler

```
#include <fenv.h>
#include <signal.h>
#include <stdio.h>
__softfp __ieee_value_t myhandler(_
                                         _ieee_value_t op1,
                                                               _ieee_value_t op2,
                                        _ieee_edata_t edata)
    __ieee_value_t ret;
if ((edata & FE_EX_FN_MASK) == FE_EX_FN_DIV)
         if ((edata & FE_EX_INTYPE_MASK) == FE_EX_INTYPE_FLOAT)
              if (op1.f == 0.0 \&\& op2.f == 0.0)
                  ret.f = 1.0;
                  return ret;
         }
if ((edata & FE_EX_INTYPE_MASK) == FE_EX_INTYPE_DOUBLE)
                 (op1.d == 0.0 \&\& op2.d == 0.0)
                  ret.d = 1.0;
                  return ret;
         }
    ^{\prime *} For all other invalid operations, raise SIGFPE as usual ^{*}/
    raise(SIGFPE);
}
int main(void)
    float i, j, k;
    fenv t env:
    fegetenv(&env);
env.statusword |= FE_IEEE_MASK_INVALID;
    env.invalid_handler = myhandler;
    fesetenv(&env);
    i = 0.0;
    j = 0.0;
k = i/j;
printf("k is %f\n", k);
}
```

Related concepts

- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.11 Exception trap handling by signals on page 3-114.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.
- 3.2 Controlling the ARM floating-point environment on page 3-104.

Related references

- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.

3.2.11 Exception trap handling by signals

You can use the SIGFPE signal to handle exceptions.

The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

Note

Note

The following functionality requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

If an exception is trapped but the trap handler address is set to NULL, a default trap handler is used.

The default trap handler raises a **SIGFPE** signal. The default handler for **SIGFPE** prints an error message and terminates the program.

If you trap **SIGFPE**, you can declare your signal handler function to have a second parameter that tells you the type of floating-point exception that occurred. This feature is provided for compatibility with Microsoft products. The values are _FPE_INVALID, _FPE_ZERODIVIDE, _FPE_OVERFLOW, FPE UNDERFLOW and FPE INEXACT. They are defined in float.h. For example:

To generate your own **SIGFPE** signals with this extra information, you can call the function __rt_raise() instead of the ISO function raise(). For example:

```
__rt_raise(SIGFPE, _FPE_INVALID);
rt raise() is declared in rt misc.h.
```

Related concepts

- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.
- 3.2 Controlling the ARM floating-point environment on page 3-104.

Related references

- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
- 4.28 __rt_raise() on page 4-157.

Related concepts

- 3.2.1 Floating-point functions for compatibility with Microsoft products on page 3-104.
- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.11 Exception trap handling by signals on page 3-114.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 5.5 ieee status() on page 5-198.
- 5.3 __fp_status() on page 5-195.

3.3 Using C99 signaling NaNs provided by mathlib (_WANT_SNAN)

If you want to use signaling NaNs, you must indicate this to the compiler by defining the macro _WANT_SNAN in your application.

This macro must be defined before you include any standard C headers. If your application is comprised of two or more translation units, either all or none of them must define _WANT_SNAN. That is, the definition must be consistent for any given application.

You must also use the relevant command-line option when you compile your source code. This is associated with the predefined macro SUPPORT SNAN .

3.4 mathlib double and single-precision floating-point functions

The math library, mathlib, provides double and single-precision functions for mathematical calculations.

For example, to calculate a cube root, you can use cbrt() (double-precision) or cbrtf() (single-precision).

ISO/IEC 14882 specifies that in addition to the **double** versions of the math functions in <cmath>, C++ adds **float** (and **long double**) overloaded versions of these functions. The ARM implementation extends this in scope to include the additional math functions that do not exist in C90, but that do exist in C99.

In C++, std::cbrt() on a **float** argument selects the single-precision version of the function, and the same type of selection applies to other floating-point functions in C++.

3.5 IEEE 754 arithmetic

The ARM floating-point environment is an implementation of the IEEE 754 standard for binary floating-point arithmetic.

This section contains the following subsections:

- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.
- 3.5.8 Exception types recognized by the ARM floating-point environment on page 3-123.

3.5.1 Basic data types for IEEE 754 arithmetic

ARM floating-point values are stored in one of two data types, *single-precision* and *double-precision*. In this documentation, they are called **float** and **double**, these being the corresponding C data types.

Related concepts

- 3.5 IEEE 754 arithmetic on page 3-118.
- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

3.5.2 Single precision data type for IEEE 754 arithmetic

A float value is 32 bits wide.

The structure is:



Figure 3-1 IEEE 754 single-precision floating-point format

The S field gives the sign of the number. It is 0 for positive, or 1 for negative.

The Exp field gives the exponent of the number, as a power of two. It is *biased* by 0x7F (127), so that very small numbers have exponents near zero and very large numbers have exponents near 0xFF (255).

For example:

- If $Exp = 0 \times 7D$ (125), the number is between 0.25 and 0.5 (not including 0.5).
- If Exp = 0x7E (126), the number is between 0.5 and 1.0 (not including 1.0).
- If Exp = 0x7F (127), the number is between 1.0 and 2.0 (not including 2.0).
- If $Exp = 0 \times 80$ (128), the number is between 2.0 and 4.0 (not including 4.0).
- If $Exp = 0 \times 81$ (129), the number is between 4.0 and 8.0 (not including 8.0).

The Frac field gives the fractional part of the number. It usually has an implicit 1 bit on the front that is not stored to save space.

For example, if Exp is 0x7F:

In general, the numeric value of a bit pattern in this format is given by the formula:

$$(-1)^S * 2^{(Exp-0x7F)} * (1 + Frac * 2^{-23})$$

Numbers stored in this form are called *normalized* numbers.

The maximum and minimum exponent values, 0 and 255, are special cases. Exponent 255 can represent infinity and store *Not a Number* (NaN) values. Infinity can occur as a result of dividing by zero, or as a result of computing a value that is too large to store in this format. NaN values are used for special purposes. Infinity is stored by setting Exp to 255 and Frac to all zeros. If Exp is 255 and Frac is nonzero, the bit pattern represents a NaN.

Exponent 0 can represent very small numbers in a special way. If Exp is zero, then the Frac field has no implicit 1 on the front. This means that the format can store 0.0, by setting both Exp and Frac to all 0 bits. It also means that numbers that are too small to store using Exp >= 1 are stored with less precision than the ordinary 23 bits. These are called *denormals*.

Related concepts

- 3.5 IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

3.5.3 Double precision data type for IEEE 754 arithmetic

A double value is 64 bits wide.

The structure is:




Figure 3-2 IEEE 754 double-precision floating-point format

As with single-precision float data types, S is the sign, Exp the exponent, and Frac the fraction. Most of the detail of float values remains true for double values, except that:

- The Exp field is biased by 0x3FF (1023) instead of 0x7F, so numbers between 1.0 and 2.0 have an Exp field of 0x3FF.
- The Exp value representing infinity and NaNs is 0x7FF (2047) instead of 0xFF.

Related concepts

3.5 IEEE 754 arithmetic on page 3-118.

- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic

Sample **float** bit patterns, together with their mathematical values.

Table 3-5 Sample single-precision floating-point values

Float value	S	Ехр	Frac	Mathematical value
0x3F800000	0	0x7F	000000	1.0
0xBF800000	1	0x7F	000000	-1.0
0x3F800001 ^c	0	0x7F	000001	1.000 000 119
0x3F400000	0	0x7E	100000	0.75
0x00800000 ^d	0	0x01	000000	1.18*10 ⁻³⁸
0x00000001e	0	0x00	000001	1.40*10 ⁻⁴⁵
0x7F7FFFFF ^f	0	0xFE	111111	3.40*10 ³⁸
0x7F800000	0	0xFF	000000	Plus infinity
0xFF800000	1	0xFF	000000	Minus infinity
0x00000000g	0	0x00	000000	0.0
0x7F800001	0	0xFF	000001	Signaling NaN
0x7FC00000 ^h	0	0xFF	100000	Quiet NaN

Related concepts

- 3.5 IEEE 754 arithmetic on page 3-118.
- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

The smallest representable number that can be seen to be greater than 1.0. The amount that it differs from 1.0 is known as the *machine epsilon*. This is 0.000 000 119 in **float**, and 0.000 000 000 000 000 222 in **double**. The machine epsilon gives a rough idea of the number of significant figures the format can keep track of. **float** can do six or seven places. **double** can do fifteen or sixteen.

d The smallest value that can be represented as a normalized number in each format. Numbers smaller than this can be stored as denormals, but are not held with as much precision.

The smallest positive number that can be distinguished from zero. This is the absolute lower limit of the format.

f The largest finite number that can be stored. Attempting to increase this number by addition or multiplication causes overflow and generates infinity (in general).

Zero. Strictly speaking, they show plus zero. Zero with a sign bit of 1, minus zero, is treated differently by some operations, although the comparison operations (for example == and !=) report that the two types of zero are equal.

h There are two types of NaNs, signaling NaNs and quiet NaNs. Quiet NaNs have a 1 in the first bit of Frac, and signaling NaNs have a zero there. The difference is that signaling NaNs cause an exception when used, whereas quiet NaNs do not.

Related references

- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic

Sample **double** bit patterns, together with their mathematical values.

Table 3-6 Sample double-precision floating-point values

s	Ехр	Frac	Mathematical value
0	0x3FF	000000	1.0
1	0x3FF	000000	-1.0
0	0x3FF	000001	1.000 000 000 000 000 222
0	0x3FE	100000	0.75
0	0x001	000000	2.23*10 ⁻³⁰⁸
0	0x000	000001	4.94*10 ⁻³²⁴
0	0x7FE	111111	1.80*10 ³⁰⁸
0	0x7FF	000000	Plus infinity
1	0x7FF	000000	Minus infinity
0	0x000	000000	0.0
0	0x7FF	000001	Signaling NaN
0	0x7FF	100000	Quiet NaN
	0 1 0 0 0 0 0 1	1 0x3FF 0 0x3FF 0 0x3FE 0 0x001 0 0x000 0 0x7FE 0 0x7FF 1 0x7FF 0 0x000 0 0x7FF	0 0x3FF 000000 1 0x3FF 000000 0 0x3FF 000001 0 0x3FE 100000 0 0x001 000000 0 0x7FE 111111 0 0x7FF 000000 1 0x7FF 000000

Related concepts

- 3.5 IEEE 754 arithmetic on page 3-118.
- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

The smallest representable number that can be seen to be greater than 1.0. The amount that it differs from 1.0 is known as the *machine epsilon*. This is 0.000 000 119 in **float**, and 0.000 000 000 000 000 222 in **double**. The machine epsilon gives a rough idea of the number of significant figures the format can keep track of. **float** can do six or seven places. **double** can do fifteen or sixteen.

The smallest value that can be represented as a normalized number in each format. Numbers smaller than this can be stored as denormals, but are not held with as much precision.


k The smallest positive number that can be distinguished from zero. This is the absolute lower limit of the format.

The largest finite number that can be stored. Attempting to increase this number by addition or multiplication causes overflow and generates infinity (in general).

m Zero. Strictly speaking, they show plus zero. Zero with a sign bit of 1, minus zero, is treated differently by some operations, although the comparison operations (for example == and !=) report that the two types of zero are equal.

There are two types of NaNs, signaling NaNs and quiet NaNs. Quiet NaNs have a 1 in the first bit of Frac, and signaling NaNs have a zero there. The difference is that signaling NaNs cause an exception when used, whereas quiet NaNs do not.

3.5.6 IEEE 754 arithmetic and rounding

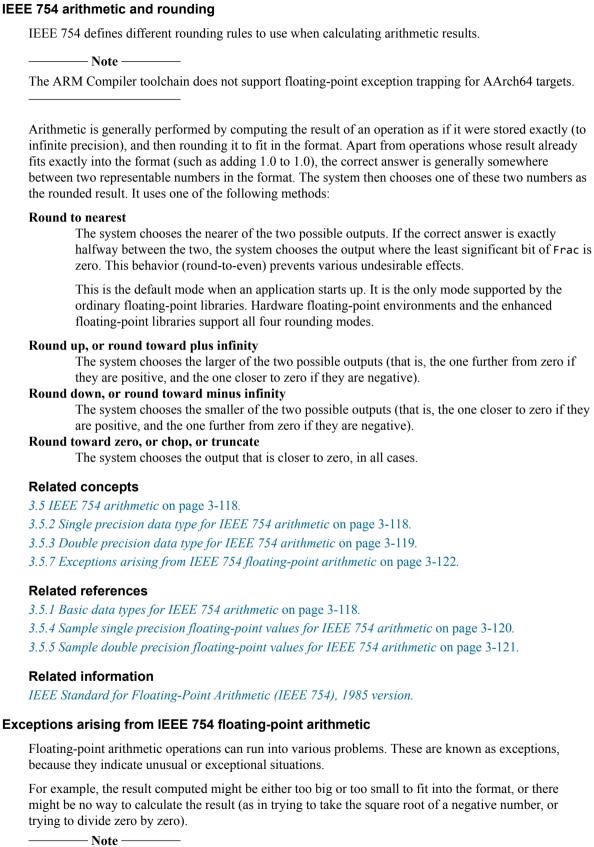

The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

3.5.7

The ARM floating-point environment can handle an exception by inventing a plausible result for the operation and returning that result, or by trapping the exception.

For example, the square root of a negative number can produce a NaN, and trying to compute a value too big to fit in the format can produce infinity. If an exception occurs and is ignored, a flag is set in the floating-point status word to tell you that something went wrong at some time in the past.

When an exception occurs, a piece of code called a trap handler is run. The system provides a default trap handler that prints an error message and terminates the application. However, you can supply your own trap handlers to clean up the exceptional condition in whatever way you choose. Trap handlers can even supply a result to be returned from the operation.

For example, if you had an algorithm where it was convenient to assume that 0 divided by 0 was 1, you could supply a custom trap handler for the Invalid Operation exception to identify that particular case and substitute the answer you required.

Related concepts

- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.11 Exception trap handling by signals on page 3-114.
- 3.2 Controlling the ARM floating-point environment on page 3-104.
- 3.5 IEEE 754 arithmetic on page 3-118.
- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.

Related references

- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 3.2.2 C99-compatible functions for controlling the ARM floating-point environment on page 3-104.
- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

3.5.8 Exception types recognized by the ARM floating-point environment

The following types of exception are recognized:

he ARM floating-point environment recognizes a number of different types of exception.
Note
he ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

Invalid Operation exception

This occurs when there is no sensible result for an operation. This can happen for any of the following reasons:

- Performing any operation on a signaling NaN, except the simplest operations (copying and changing the sign).
- Adding plus infinity to minus infinity, or subtracting an infinity from itself.
- Multiplying infinity by zero.
- Dividing 0 by 0, or dividing infinity by infinity.
- Taking the remainder from dividing anything by 0, or infinity by anything.
- Taking the square root of a negative number (not including minus zero).
- Converting a floating-point number to an integer if the result does not fit.
- Comparing two numbers if one of them is a NaN.

If the Invalid Operation exception is not trapped, these operations return a quiet NaN. The exception is conversion to an integer. This returns zero because there are no quiet NaNs in integers.

Divide by Zero exception

This occurs if you divide a finite nonzero number by zero. Be aware that:

- Dividing zero by zero gives an Invalid Operation exception.
- Dividing infinity by zero is valid and returns infinity.

If Divide by Zero is not trapped, the operation returns infinity.

Overflow exception

This occurs when the result of an operation is too big to fit into the format. This happens, for example, if you add the largest representable number to itself. The largest float value is 0x7F7FFFFF.

If Overflow is not trapped, the operation returns infinity, or the largest finite number, depending on the rounding mode.

Underflow exception

This can occur when the result of an operation is too small to be represented as a normalized number (with Exp at least 1).

The situations that cause Underflow depend on whether it is trapped or not:

- If Underflow is trapped, it occurs whenever a result is too small to be represented as a normalized number.
- If Underflow is not trapped, it only occurs if the result requires rounding. So, for example, dividing the **float** number 0x00800000 by 2 does not signal Underflow, because the result 0x00400000 is exact. However, trying to multiply the float number 0x00000001 by 1.5 does signal Underflow.

Note
For readers familiar with the IEEE 754 specification, the chosen implementation options in
the ARM compiler are to detect tininess before rounding, and to detect loss of accuracy as an
inexact result.

If Underflow is not trapped, the result is rounded to one of the two nearest representable denormal numbers, according to the current rounding mode. The loss of precision is ignored and the system returns the best result it can.

The Inexact Result exception happens whenever the result of an operation requires rounding.
This would cause significant loss of speed if it had to be detected on every operation in
software, so the ordinary floating-point libraries do not support the Inexact Result exception.
The enhanced floating-point libraries, and hardware floating-point systems, all support
Inexact Result.

If Inexact Result is not trapped, the system rounds the result in the usual way.

The flag for Inexact Result is also set by Overflow and Underflow if either one of those is not trapped.

All exceptions are untrapped by default.

Related concepts

- 3.2.9 Writing a custom exception trap handler on page 3-109.
- 3.2.4 Exception flag handling on page 3-106.
- 3.2.10 Example of a custom exception handler on page 3-113.
- 3.2.11 Exception trap handling by signals on page 3-114.
- 3.5 IEEE 754 arithmetic on page 3-118.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.

Related information

IEEE Standard for Floating-Point Arithmetic (IEEE 754), 1985 version.

Related concepts

- 3.5.2 Single precision data type for IEEE 754 arithmetic on page 3-118.
- 3.5.3 Double precision data type for IEEE 754 arithmetic on page 3-119.
- 3.5.6 IEEE 754 arithmetic and rounding on page 3-122.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

Related references

- 3.5.1 Basic data types for IEEE 754 arithmetic on page 3-118.
- 3.5.4 Sample single precision floating-point values for IEEE 754 arithmetic on page 3-120.
- 3.5.5 Sample double precision floating-point values for IEEE 754 arithmetic on page 3-121.

Chapter 4

The C and C++ Library Functions reference

Describes the standard C and C++ library functions that are extensions to the C Standard or that differ in some way to the standard.

Some of the standard functions interact with the ARM retargetable semihosting environment. Such functions are also documented.

It contains the following sections:

- 4.1 aeabi errno addr() on page 4-129.
- 4.2 alloca() on page 4-130.
- 4.3 clock() on page 4-131.
- 4.4 clock init() on page 4-132.
- 4.5 default signal handler() on page 4-133.
- 4.6 errno on page 4-134.
- 4.7 *findlocale()* on page 4-135.
- 4.8 fisatty() on page 4-136.
- 4.9 get lconv() on page 4-137.
- 4.10 getenv() on page 4-138.
- 4.11 getenv init() on page 4-139.
- 4.12 heapstats() on page 4-140.
- 4.13 heapvalid() on page 4-141.
- 4.14 lconv structure on page 4-142.
- 4.15 localeconv() on page 4-144.
- 4.16 _membitcpybl(), _membitcpybb(), _membitcpyhl(), _membitcpyhl(), _membitcpywl(), _membitmovebl(), _membitmovebl(), _membitmovehl(), _membitmovehl(), _membitmovehl(), _membitmovewl(), _membitmovewb() on page 4-145.
- 4.17 posix memalign() on page 4-146.
- 4.18 raise() on page 4-147.

- 4.19 rand r() on page 4-148.
- 4.20 remove() on page 4-149.
- 4.21 rename() on page 4-150.
- 4.22 rt entry on page 4-151.
- 4.23 __rt_exit() on page 4-152.
- 4.24 <u>__rt_fp_status_addr()</u> on page 4-153.
- 4.25 __rt_heap_extend() on page 4-154.
- 4.26 rt lib init() on page 4-155.
- 4.27 rt lib shutdown() on page 4-156.
- 4.28 rt raise() on page 4-157.
- 4.29 rt stackheap init() on page 4-158.
- 4.30 setlocale() on page 4-159.
- 4.31 srand r() on page 4-161.
- 4.32 strcasecmp() on page 4-162.
- 4.33 strncasecmp() on page 4-163.
- 4.34 strlcat() on page 4-164.
- 4.35 strlcpy() on page 4-165.
- 4.36 sys close() on page 4-166.
- 4.37 sys command string() on page 4-167.
- 4.38 sys ensure() on page 4-168.
- 4.39 sys exit() on page 4-169.
- 4.40 sys flen() on page 4-170.
- 4.41 _sys_istty() on page 4-171.
- 4.42 _sys_open() on page 4-172.
- 4.43 sys read() on page 4-173.
- 4.44 sys seek() on page 4-174.
- 4.45 sys tmpnam() on page 4-175.
- 4.46 sys write() on page 4-176.
- 4.47 system() on page 4-177.
- 4.48 time() on page 4-178.
- 4.49 ttywrch() on page 4-179.
- 4.50 user heap extend() on page 4-180.
- 4.51 user heap extent() on page 4-181.
- 4.52 user setup stackheap() on page 4-182.
- 4.53 vectab stack and reset on page 4-183.
- 4.54 wcscasecmp() on page 4-184.
- 4.55 wcsncasecmp() on page 4-185.
- 4.56 wcstombs() on page 4-186.
- 4.57 Thread-safe C library functions on page 4-187.
- 4.58 C library functions that are not thread-safe on page 4-189.

4.1 __aeabi_errno_addr()

The __aeabi_errno_addr() returns the address of the C library errno variable when the C library attempts to read or write errno.

Syntax

volatile int *__aeabi_errno_addr(void);

Usage

The library provides a default implementation. It is unlikely that you have to re-implement this function.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Related references

4.6 errno on page 4-134.

Related information

C Library ABI for the ARM Architecture.

4.2 alloca()

Defined in alloca.h, the alloca() function allocates local storage in a function. It returns a pointer to the number of bytes of memory allocated.

Syntax

void *alloca(size_t size);

Usage

The default implementation returns an eight-byte aligned block of memory on the stack.

Memory returned from alloca() must never be passed to free(). Instead, the memory is de-allocated automatically when the function that called alloca() returns.

_____ Note _____

alloca() must not be called through a function pointer. You must take care when using alloca() and setjmp() in the same function, because memory allocated by alloca() between calling setjmp() and longjmp() is de-allocated by the call to longjmp().

This function is a common nonstandard extension to many C libraries.

Returns

Returns in size a pointer to the number of bytes of memory allocated.

Related concepts

1.5.3 ARM C libraries and thread-safe functions on page 1-24.

Related references

1.7.1 Building an application without the C library on page 1-38.

4.57 Thread-safe C library functions on page 4-187.

4.3 clock()

This is the standard C library clock function from time.h.

Syntax

clock_t clock(void);

Usage

The default implementation of this function uses semihosting.

If the units of clock_t differ from the default of centiseconds, you must define __CLK_TCK on the compiler command line or in your own header file. The value in the definition is used for CLK_TCK and CLOCKS PER SEC. The default value is 100 for centiseconds.

Note -	
Tiole -	

If you re-implement clock() you must also re-implement _clock_init().

Returns

The returned value is an unsigned integer.

Related references

1.6.5 Direct semihosting C library function dependencies on page 1-34.

4.4 _clock_init()

Defined in rt_misc.h, the _clock_init() function is an initialization function for clock().

It is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

void clock init(void);

Usage

This is a function that you can re-implement in an implementation-specific way. It is called from the library initialization code, so you do not have to call it from your application code.

_____ Note _____

You must re-implement this function if you re-implement clock().

The initialization that _clock_init() applies enables clock() to return the time that has elapsed since the program was started.

An example of how you might re-implement _clock_init() might be to set the timer to zero. However, if your implementation of clock() relies on a system timer that cannot be reset, then _clock_init() could instead read the time at startup (when called from the library initialization code), with clock() subsequently subtracting the time that was read at initialization, from the current value of the timer. In both cases, some form of initialization is required of clock init().

Related references

1.6.5 Direct semihosting C library function dependencies on page 1-34.

4.5 __default_signal_handler()

Defined in rt_misc.h, the __default_signal_handler() function handles a raised signal. The default action is to print an error message and exit.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
int __default_signal_handler(int signal, int type);
```

Usage

The default signal handler returns a nonzero value to indicate that the caller has to arrange for the program to exit. You can replace the default signal handler by defining:

```
int default signal handler(int signal, int type);
```

The interface is the same as __raise(), but this function is only called after the C signal handling mechanism has declined to process the signal.

A complete list of the defined signals is in signal.h.

,	NT - 4 -
	Note ———

The signals used by the libraries might change in future releases of ARM Compiler.

Related references

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.

1.6.6 Indirect semihosting C library function dependencies on page 1-35.

```
4.18 __raise() on page 4-147.
```

4.49 ttywrch() on page 4-179.

4.39 _sys_exit() on page 4-169.

4.28 rt raise() on page 4-157.

4.6 errno

The C library errno variable is defined in the implicit static data area of the library.

This area is identified by __user_libspace(). The function that returns the address of errno is:

```
(*(volatile int *) __aeabi_errno_addr())
```

You can define __aeabi_errno_addr() if you want to place errno at a user-defined location instead of the default location identified by __user_libspace().

_____Note _____

Legacy versions of errno.h might define errno in terms of __rt_errno_addr() rather than __aeabi_errno_addr(). The function name __rt_errno_addr() is a legacy from pre-ABI versions of the tools, and is still supported to ensure that object files generated with those tools link successfully.

Returns

The return value is a pointer to a variable of type **int**, containing the currently applicable instance of errno.

Related concepts

1.5.4 Use of static data in the C libraries on page 1-24.

Related references

4.1 aeabi errno addr() on page 4-129.

1.5.5 Use of the user libspace static data area by the C libraries on page 1-25.

Related information

Application Binary Interface for the ARM Architecture.

4.7 findlocale()

Defined in rt_locale.h, _findlocale() searches a set of contiguous locale data blocks for the requested locale, and returns a pointer to that locale.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
void const *_findlocale(void const *index, const char *name);
Where:
index
    is a pointer to a set of locale data blocks that are contiguous in memory and that end with a terminating value (set by the LC_index_end macro).
name
    is the name of the locale to find.
```

Usage

You can use findlocale() as an optional helper function when defining your own locale setup.

The _get_lc_*() functions, for example, _get_lc_ctype(), are expected to return a pointer to a locale definition created using the assembler macros. If you only want to write one locale definition, you can write an implementation of _get_lc_ctype() that always returns the same pointer. However, if you want to use different locale definitions at runtime, then the _get_lc_*() functions have to be able to return a different data block depending on the name passed to them as an argument. _findlocale() provides an easy way to do this.

Returns

Returns a pointer to the requested data block.

Related concepts

1.9 Assembler macros that tailor locale functions in the C library on page 1-49. 1.9.2 Runtime selection of the locale subsystem in the C library on page 1-50.

Related references

```
1.9.1 Link time selection of the locale subsystem in the C library on page 1-49.
1.9.3 Definition of locale data blocks in the C library on page 1-50.
4.14 lconv structure on page 4-142.
4.9 _get_lconv() on page 4-137.
4.15 localeconv() on page 4-144.
4.30 setlocale() on page 4-159.
```

4.8 _fisatty()

Defined in stdio.h, the _fisatty() function determines whether the given stdio stream is attached to a terminal device or a normal file.

It calls the _sys_istty() low-level function on the underlying file handle.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
int _fisatty(FILE *stream);
```

The return value indicates the stream destination:

0 A file.
1 A terminal.
Negative

Related references

An error.

4.41 sys istty() on page 4-171.

4.9 _get_lconv()

Defined in locale.h, _get_lconv() performs the same function as the standard C library function, localeconv(), except that it delivers the result in user-provided memory instead of an internal static variable.

_get_lconv() sets the components of an lconv structure with values appropriate for the formatting of numeric quantities.

Syntax

```
void _get_lconv(struct lconv *Lc);
```

Usage

This extension to the ISO C library does not use any static data. If you are building an application that must conform strictly to the ISO C standard, use localeconv() instead.

Returns

The existing 1conv structure *tc* is filled with formatting data.

Related references

- 4.7 findlocale() on page 4-135.
- 4.14 lconv structure on page 4-142.
- 4.15 localeconv() on page 4-144.
- 4.30 setlocale() on page 4-159.

4.10 getenv()

This is the standard C library getenv() function from stdlib.h. It gets the value of a specified environment variable.

Syntax

char *getenv(const char *name);

Usage

The default implementation returns NULL, indicating that no environment information is available.

If you re-implement getenv(), ARM recommends that you re-implement it in such a way that it searches some form of environment list for the input string, *name*. The set of environment names and the method for altering the environment list are implementation-defined. getenv() does not depend on any other function, and no other function depends on getenv().

A function closely associated with getenv() is _getenv_init(). _getenv_init() is called during startup if it is defined, to enable a user re-implementation of getenv() to initialize itself.

Returns

The return value is a pointer to a string associated with the matched list member. The array pointed to must not be modified by the program, but might be overwritten by a subsequent call to getenv().

4.11 _getenv_init()

Defined in rt_misc.h, the _getenv_init() function enables a user version of getenv() to initialize itself.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

void _getenv_init(void);

Usage

If this function is defined, the C library initialization code calls it when the library is initialized, that is, before main() is entered.

4.12 heapstats()

Defined in stdlib.h, the _heapstats() function displays statistics on the state of the storage allocation heap.

Syntax

```
void __heapstats(int (*dprint)(void *param, char const *format,...), void *param);
```

Usage

The default implementation in the compiler gives information on how many free blocks exist, and estimates their size ranges.

The __heapstats() function generates output as follows:

```
32272 bytes in 2 free blocks (avge size 16136)
1 blocks 2^12+1 to 2^13
1 blocks 2^13+1 to 2^14
```

Line 1 of the output displays the total number of bytes, the number of free blocks, and the average size. The following lines give an estimate of the size of each block in bytes, expressed as a range.

_heapstats() does not give information on the number of used blocks.

The function outputs its results by calling the output function <code>dprint()</code>, that must work like <code>fprintf()</code>. The first parameter passed to <code>dprint()</code> is the supplied pointer <code>param</code>. You can pass <code>fprintf()</code> itself, provided you cast it to the right function pointer type. This type is defined as a <code>typedef</code> for convenience. It is called heapprt. For example:

```
__heapstats((__heapprt)fprintf, stderr);
```

If you call fprintf() on a stream that you have not already sent output to, the library calls malloc() internally to create a buffer for the stream. If this happens in the middle of a call to __heapstats(), the heap might be corrupted. Therefore, you must ensure you have already sent some output to stderr.

If you are using the default one-region memory model, heap memory is allocated only as it is required. This means that the amount of free heap changes as you allocate and deallocate memory. For example, the sequence:

```
int *ip;
_heapstats((_heapprt)fprintf,stderr); // print initial free heap size
ip = malloc(200000);
free(ip);
_heapstats((_heapprt)fprintf,stderr); // print heap size after freeing
```

gives output such as:

```
4076 bytes in 1 free blocks (avge size 4076)
1 blocks 2^10+1 to 2^11
2008180 bytes in 1 free blocks (avge size 2008180)
1 blocks 2^19+1 to 2^20
```

This function is not part of the C library standard, but the ARM C library supports it as an extension.

4.13 heapvalid()

Defined in stdlib.h, the _heapvalid() function performs a consistency check on the heap.

Syntax

int __heapvalid(int (*dprint)(void *param, char const *format,...), void *param, int
verbose);

Usage

__heapvalid() outputs full information about every free block if the *verbose* parameter is nonzero. Otherwise, it only outputs errors.

The function outputs its results by calling the output function <code>dprint()</code>, that must work like <code>fprintf()</code>. The first parameter passed to <code>dprint()</code> is the supplied pointer <code>param</code>. You can pass <code>fprintf()</code> itself, provided you cast it to the right function pointer type. This type is defined as a <code>typedef</code> for convenience. It is called __heapprt. For example:

it is calledneappite. For example.
<pre>_heapvalid((_heapprt) fprintf, stderr, 0);</pre>
Note
If you call fprintf() on a stream that you have not already sent output to, the library calls malloc() internally to create a buffer for the stream. If this happens in the middle of a call toheapvalid(), th heap might be corrupted. You must therefore ensure you have already sent some output to stderr. The example code fails if you have not already written to the stream.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

4.14 Iconv structure

Defined in locale.h, the lconv structure contains numeric formatting information

The structure is filled by the functions _get_lconv() and localeconv().

The definition of lconv from locale.h is as follows.

```
struct lconv {
  char *decimal_point;
           ^{\prime *} The ar{\mathsf{dec}}imal point character used to format non monetary quantities ^*/
  char *thousands sep;
            ^st The character used to separate groups of digits to the left of the ^st
          /* decimal point character in formatted non monetary quantities.
  char *grouping;
  /* A string whose elements indicate the size of each group of digits
           * in formatted non monetary quantities. See below for more details.
  char *int_curr_symbol;
          /* The international currency symbol applicable to the current locale.*/
/* The first three characters contain the alphabetic international */
/* currency symbol in accordance with those specified in ISO 4217. */
          /* Codes for the representation of Currency and Funds. The fourth
/* character (immediately preceding the null character) is the
/* character used to separate the international currency symbol from
           '* the monetary quantity.
  char *currency_symbol;
/* The local currency symbol applicable to the current locale.
                                                                                                              */
  char *mon_decimal_point;
   /* The decimal point used to format monetary quantities.
  char *mon_thousands_sep;
            \bar{} The separator for groups of digits to the left of the decimal point*/
           /* in formatted monetary quantities.
  char *mon_grouping;
          /* A string whose elements indicate the size of each group of digits
          /* in formatted monetary quantities. See below for more details.
  char *positive_sign;
          /* The string used to indicate a non negative-valued formatted
           /* monetary quantity.
  char *negative_sign;
          /* The string used to indicate a negative-valued formatted monetary
          /* quantity
  char int_frac_digits;
   /* The number of fractional digits (those to the right of the
          /* decimal point) to be displayed in an internationally formatted
           /* monetary quantities.
  char frac_digits;
          /* The number of fractional digits (those to the right of the /* decimal point) to be displayed in a formatted monetary quantity.
  char p_cs_precedes;
   /* Set to 1 or 0 if the currency_symbol respectively precedes or
           /* succeeds the value for a non negative formatted monetary quantity.
  char p_sep_by_space;
   /* Set to 1 or 0 if the currency_symbol respectively is or is not
   /* separated by a space from the value for a non negative formatted
           /* monetary quantity.
  char n_cs_precedes;
          /* Set to 1 or 0 if the currency_symbol respectively precedes or /* succeeds the value for a negative formatted monetary quantity.
  char n_sep_by_space;
   /* Set to 1 or 0 if the currency_symbol respectively is or is not
   /* separated by a space from the value for a negative formatted
          /* monetary quantity.
  char p_sign_posn;
/* Set to a
          /* Set to a value indicating the position of the positive_sign for a */
/* non negative formatted monetary quantity. See below for more details*/
  char n_sign_posn;    /* Set to a value indicating the position of the negative_sign for a */    /* negative formatted monetary quantity. */
```

The elements of grouping and mon_grouping are interpreted as follows:

CHAR_MAX

No additional grouping is to be performed.

0

The previous element is repeated for the remainder of the digits.

other

The value is the number of digits that comprise the current group. The next element is examined to determine the size of the next group of digits to the left of the current group.

The value of p_sign_posn and n_sign_posn are interpreted as follows:

- 0
- Parentheses surround the quantity and currency symbol.
- 1
 - The sign string precedes the quantity and currency symbol.
- 2
- The sign string is after the quantity and currency symbol.
- 3
- The sign string immediately precedes the currency symbol.
- 4
- The sign string immediately succeeds the currency symbol.

Related references

- 4.7 findlocale() on page 4-135.
- 4.9 get lconv() on page 4-137.
- 4.15 localeconv() on page 4-144.
- 4.30 setlocale() on page 4-159.

4.15 localeconv()

Defined in stdlib.h, localeconv() creates and sets the components of an lconv structure with values appropriate for the formatting of numeric quantities according to the rules of the current locale.

Syntax

```
struct lconv *localeconv(void);
```

Usage

The members of the structure with type **char** * are strings. Any of these, except for decimal_point, can point to an empty string, "", to indicate that the value is not available in the current locale or is of zero length.

The members with type **char** are non-negative numbers. Any of the members can be CHAR_MAX to indicate that the value is not available in the current locale.

This function is not thread-safe, because it uses an internal static buffer. _get_lconv() provides a thread-safe alternative.

Returns

The function returns a pointer to the filled-in object. The structure pointed to by the return value is not modified by the program, but might be overwritten by a subsequent call to the localeconv() function. In addition, calls to the setlocale() function with categories LC_ALL, LC_MONETARY, or LC_NUMERIC might overwrite the contents of the structure.

Related references

```
4.7 _findlocale() on page 4-135.
4.14 lconv structure on page 4-142.
4.9 _get_lconv() on page 4-137.
4.30 setlocale() on page 4-159.
```

4.16_membitcpybl(), _membitcpybl(), _membitcpybl(), _membitcpybl(), _membitcpywl(), _membitmovebl(), _membit

4.16 _membitcpybl(), _membitcpybb(), _membitcpyhl(), _membitcpyhb(), _membitcpywb(), _membitmovebl(), _membitmovebb(), _membitmovewbl(), _membitmovewbl(), _membitmovewbl(), _membitmovewbl()

Similar to the standard C library memcpy() and memmove() functions, these nonstandard C library functions provide bit-aligned memory operations.

They are defined in string.h.

Syntax

```
void _membitcpy[b|h|w][b|l](void *dest, const void *src, int dest_offset, int
src_offset, size_t nbits);

void _membitmove[b|h|w][b|l](void *dest, const void *src, int dest_offset, int
src_offset, size_t nbits);
```

Usage

The number of contiguous bits specified by *nbits* is copied, or moved (depending on the function being used), from a memory location starting *src_offset* bits after (or before if a negative offset) the address pointed to by *src*, to a location starting *dest_offset* bits after (or before if a negative offset) the address pointed to by *dest*.

To define a contiguous sequence of bits, a form of ordering is required. The variants of each function define this order, as follows:

- Functions whose second-last character is b, for example _membitcpybl(), are byte-oriented. Byte-oriented functions consider all of the bits in one byte to come before the bits in the next byte.
- Functions whose second-last character is h are halfword-oriented.
- Functions whose second-last character is w are word-oriented.

Within each byte, halfword, or word, the bits can be considered to go in different order depending on the endianness. Functions ending in b, for example _membitmovewb(), are bitwise big-endian. This means that the *Most Significant Bit* (MSB) of each byte, halfword, or word (as appropriate) is considered to be the first bit in the word, and the *Least Significant Bit* (LSB) is considered to be the last. Functions ending in 1 are bitwise little-endian. They consider the LSB to come first and the MSB to come last.

As with memcpy() and memmove(), the bitwise memory copying functions copy as fast as they can in their assumption that source and destination memory regions do not overlap, whereas the bitwise memory move functions ensure that source data in overlapping regions is copied before being overwritten.

On a little-endian platform, the bitwise big-endian functions are distinct, but the bitwise little-endian functions use the same bit ordering, so they are synonymous symbols that refer to the same function. On a big-endian platform, the bitwise big-endian functions are all effectively the same, but the bitwise little-endian functions are distinct.

4.17 posix memalign()

Defined in stdlib.h, the posix_memalign() function provides aligned memory allocation.

This function is fully POSIX-compliant.

Syntax

int posix_memalign(void **memptr, size_t alignment, size_t size);

Usage

This function allocates size bytes of memory at an address that is a multiple of alignment.

The value of *alignment* must be a power of two and a multiple of sizeof(void *).

You can free memory allocated by posix_memalign() using the standard C library free() function.

Returns

The returned address is written to the void * variable pointed to by memptr.

The integer return value from the function is zero on success, or an error code on failure.

If no block of memory can be found with the requested size and alignment, the function returns ENOMEM and the value of *memptr is undefined.

Related information

The Open Group Base Specifications, IEEE Std 1003.1.

4.18 raise()

Defined in rt_misc.h, the __raise() function raises a signal to indicate a runtime anomaly.

It is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
int __raise(int signal, int type);
```

where:

signal

is an integer that holds the signal number.

type

is an integer, string constant or variable that provides additional information about the circumstances that the signal was raised in, for some kinds of signal.

Usage

If the user has configured the handling of the signal by calling signal() then __raise() takes the action specified by the user. That is, either to ignore the signal or to call the user-provided handler function. Otherwise, __raise() calls __default_signal_handler(), which provides the default signal handling behavior.

You can replace the __raise() function by defining:

```
int __raise(int signal, int type);
```

This enables you to bypass the C signal mechanism and its data-consuming signal handler vector, but otherwise gives essentially the same interface as:

```
int __default_signal_handler(int signal, int type);
```

The default signal handler of the library uses the *type* parameter of __raise() to vary the messages it outputs.

Returns

There are three possibilities for a __raise() return condition:

no return

The handler performs a long jump or restart.

0

The signal was handled.

nonzero

The calling code must pass that return value to the exit code. The default library implementation calls _sys_exit(rc) if __raise() returns a nonzero return code rc.

Related concepts

1.5.11 Thread safety in the ARM C library on page 1-30.

Related references

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.

1.6.6 Indirect semihosting C library function dependencies on page 1-35.

```
4.5 __default_signal_handler() on page 4-133.
```

4.49 ttywrch() on page 4-179.

4.39 _sys_exit() on page 4-169.

4.28 rt raise() on page 4-157.

4.19 _rand_r()

Defined in stdlib.h, the _rand_r() function is a reentrant version of the rand() function.

Syntax

```
int _rand_r(struct _rand_state * buffer);
```

where:

buffer

is a pointer to a user-supplied buffer storing the state of the random number generator.

Usage

This function enables you to explicitly supply your own buffer in thread-local storage.

Related references

4.31 _srand_r() on page 4-161.

4.58 C library functions that are not thread-safe on page 4-189.

4.20 remove()

This is the standard C library remove() function from stdio.h.

Syntax

int remove(const char *filename);

Usage

The default implementation of this function uses semihosting.

remove() causes the file whose name is the string pointed to by *filename* to be removed. Subsequent attempts to open the file result in failure, unless it is created again. If the file is open, the behavior of the remove() function is implementation-defined.

Returns

Returns zero if the operation succeeds or nonzero if it fails.

Related references

4.21 rename()

This is the standard C library rename() function from stdio.h.

Syntax

int rename(const char *old, const char *new);

Usage

The default implementation of this function uses semihosting.

rename() causes the file whose name is the string pointed to by *old* to be subsequently known by the name given by the string pointed to by *new*. The file named *old* is effectively removed. If a file named by the string pointed to by *new* exists prior to the call of the rename() function, the behavior is implementation-defined.

Returns

Returns zero if the operation succeeds or nonzero if it fails. If the operation returns nonzero and the file existed previously it is still known by its original name.

Related references

4.22 __rt_entry

The symbol __rt_entry is the starting point for a program using the ARM C library.

Control passes to __rt_entry after all scatter-loaded regions have been relocated to their execution addresses.

Usage

The default implementation of __rt_entry:

- 1. Sets up the heap and stack.
- 2. Initializes the C library by calling __rt_lib_init.
- 3. Calls main().
- 4. Shuts down the C library, by calling __rt_lib_shutdown.
- 5. Exits.
- __rt_entry must end with a call to one of the following functions:

exit()

Calls atexit()-registered functions and shuts down the library.

__rt_exit()

Shuts down the library but does not call atexit() functions.

_sys_exit()

Exits directly to the execution environment. It does not shut down the library and does not call atexit() functions.

4.23 __rt_exit()

Defined in rt_misc.h, the __rt_exit() function shuts down the library but does not call functions registered with atexit().

atexit()-registered functions are called by exit().

The __rt_exit() function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
void __rt_exit(int code);
```

Where code is not used by the standard function.

Usage

Shuts down the C library by calling __rt_lib_shutdown(), and then calls _sys_exit() to terminate the application. Reimplement _sys_exit() rather than __rt_exit().

Returns

This function does not return.

Related references

4.39 sys exit() on page 4-169.

4.24 __rt_fp_status_addr()

Defined in rt_fp.h, the __rt_fp_status_addr() function returns the address of the floating-point status word.

By default, the floating-point status word resides in __user_libspace.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

Syntax

```
unsigned *__rt_fp_status_addr(void);
```

Usage

If __rt_fp_status_addr() is not defined, the default implementation from the C library is used. The value is initialized when __rt_lib_init() calls _fp_init(). The constants for the status word are listed in fenv.h. The default floating-point status is 0.

Returns

The address of the floating-point status word.

Related concepts

1.5.11 Thread safety in the ARM C library on page 1-30.

4.25 __rt_heap_extend()

Defined in rt_heap.h, the __rt_heap_extend() function returns a new eight-byte aligned block of memory to add to the heap, if possible.

If you reimplement __rt_stackheap_init(), you must reimplement this function. An incomplete prototype implementation is in rt_memory.s.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
extern unsigned __rt_heap_extend(unsigned size, void **block);
```

Usage

The calling convention is ordinary AAPCS. On entry, ro is the minimum size of the block to add, and r1 holds a pointer to a location to store the base address.

The default implementation has the following characteristics:

- The returned size is one of the following:
 - In AArch32 state, a multiple of eight bytes of at least the requested size.
 - In AArch64 state, a multiple of 16 bytes of at least the requested size.
 - 0, denoting that the request cannot be honored.0, denoting that the request cannot be honored.
- The returned base address is aligned on:
 - In AArch32 state, an eight-byte boundary.
 - In AArch64 state, a 16-byte boundary.
- Size is measured in bytes.
- The function is subject only to ARM Architecture Procedure Call Standard (AAPCS) constraints.

Returns

The default implementation extends the heap if there is sufficient free heap memory. If it cannot, it calls __user_heap_extend() if it is implemented. On exit, r0 is the size of the block acquired, or 0 if nothing could be obtained, and the memory location r1 pointed to on entry contains the base address of the block.

Related concepts

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

Related references

```
4.29 __rt_stackheap_init() on page 4-158.

4.50 __user_heap_extend() on page 4-180.

4.51 __user_heap_extent() on page 4-181.

4.52 __user_setup_stackheap() on page 4-182.
```

Related information

Procedure Call Standard for the ARM Architecture.

4.26 __rt_lib_init()

Defined in rt_misc.h, this is the library initialization function and is the companion to __rt_lib_shutdown().

Syntax

```
extern value_in_regs struct __argc_argv __rt_lib_init(unsigned heapbase, unsigned
heaptop);
where:
heapbase
    is the start of the heap memory block.
heaptop
    is the end of the heap memory block.
```

Usage

This function is called immediately after __rt_stackheap_init() and is passed an initial chunk of memory to use as a heap. This function is the standard ARM C library initialization function and it must not be reimplemented.

Returns

This function returns argc and argv ready to be passed to main(). The structure is returned in the registers as:

```
struct __argc_argv
{
   int argc;
   char **argv;
   int r2, r3; // optional extra arguments that on entry to main() are
}; // found in registers R2 and R3.
```

4.27 __rt_lib_shutdown()

Defined in $rt_misc.h$, $_rt_lib_shutdown()$ is the library shutdown function and is the companion to $_rt_lib_init()$.

Syntax

void __rt_lib_shutdown(void);

Usage

This function is provided in case a user must call it directly. This is the standard ARM C library shutdown function and it must not be reimplemented.

4.28 rt raise()

Defined in rt_misc.h, the __rt_raise() function raises a signal to indicate a runtime anomaly.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Syntax

```
void __rt_raise(int signal, int type);
where:
```

signal

is an integer that holds the signal number.

type

is an integer, string constant or variable that provides additional information about the circumstances that the signal was raised in, for some kinds of signal.

Usage

Redefine this function to replace the entire signal handling mechanism for the library. The default implementation calls __raise().

Depending on the value returned from __raise():

no return

The handler performed a long jump or restart and __rt_raise() does not regain control.

0

The signal was handled and rt raise() exits.

nonzero

The default library implementation calls _sys_exit(rc) if __raise() returns a nonzero return code rc.

Related references

1.23.3 ISO-compliant implementation of signals supported by the signal() function in the C library and additional type arguments on page 1-81.

```
4.5 default signal handler() on page 4-133.
```

- 4.18 raise() on page 4-147.
- 4.49 ttywrch() on page 4-179.
- 4.39 sys exit() on page 4-169.

4.29 rt stackheap init()

Defined in rt_misc.h, the __rt_stackheap_init() function sets up the stack pointer and returns a region of memory for use as the initial heap.

It is called from the library initialization code.

On return from this function, SP must point to the top of the stack region, r0 must point to the base of the heap region, and r1 must point to the limit of the heap region.

A user-defined memory model (that is, __rt_stackheap_init() and __rt_heap_extend()) is allocated 16 bytes of storage from the __user_perproc_libspace area if wanted. It accesses this storage by calling __rt_stackheap_storage() to return a pointer to its 16-byte region.

This function is not part of the C library standard, but the ARM C library supports it as an extension.

Related concepts

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

Related references

- 4.25 rt heap extend() on page 4-154.
- 4.50 user heap extend() on page 4-180.
- 4.51 user heap extent() on page 4-181.
- 4.52 user setup stackheap() on page 4-182.

4.30 setlocale()

Defined in locale.h, the setlocale() function selects the appropriate locale as specified by the *category* and *Locale* arguments.

Syntax

```
char *setlocale(int category, const char *locale);
```

Usage

Use the setlocale() function to change or query part or all of the current locale. The effect of the *category* argument for each value is:

LC COLLATE

Affects the behavior of strcoll().

LC CTYPE

Affects the behavior of the character handling functions.

LC MONETARY

Affects the monetary formatting information returned by localeconv().

LC_NUMERIC

Affects the decimal-point character for the formatted input/output functions and the string conversion functions and the numeric formatting information returned by localeconv().

LC TIME

Can affect the behavior of strftime(). For currently supported locales, the option has no effect. LC ALL

Affects all locale categories. This is the bitwise OR of all the locale categories.

A value of "C" for *Locale* specifies the minimal environment for C translation. An empty string, "", for *Locale* specifies the implementation-defined native environment. At program startup, the equivalent of setlocale(LC_ALL, "C") is executed.

Valid *Locale* values depend on which __use_X_ctype symbol is imported (__use_iso8859_ctype, __use_sjis_ctype, or __use_utf8_ctype), and on user-defined locales. ______ Note _____
Only one __use_X_ctype symbol can be imported.

Returns

If a pointer to a string is given for locale and the selection is valid, the string associated with the specified category for the new locale is returned. If the selection cannot be honored, a null pointer is returned and the locale is not changed.

A null pointer for locale causes the string associated with the category for the current locale to be returned and the locale is not changed.

If category is LC_ALL and the most recent successful locale-setting call uses a category other than LC_ALL, a composite string might be returned. The string returned when used in a subsequent call with its associated category restores that part of the program locale. The string returned is not modified by the program, but might be overwritten by a subsequent call to setlocale().

Related concepts

Shift-JIS and UTF-8 implementation on page 1-50.

Related references

ISO8859-1 implementation on page 1-49.

1.9.3 Definition of locale data blocks in the C library on page 1-50.

- 4.7 findlocale() on page 4-135.
- 4.14 lconv structure on page 4-142.
- 4.9 _get_lconv() on page 4-137.
- 4.15 localeconv() on page 4-144.

4.31 _srand_r()

Defined in stdlib.h, this is a reentrant version of the srand() function.

Syntax

Usage

This function enables you to explicitly supply your own buffer that can be used for thread-local storage.

If _srand_r() is repeatedly called with the same seed value, the same sequence of pseudo-random numbers is repeated. If _rand_r() is called before any calls to _srand_r() have been made with the same buffer, undefined behavior occurs because the buffer is not initialized.

Related references

```
4.19 _rand_r() on page 4-148.
4.58 C library functions that are not thread-safe on page 4-189.
```

4.32 strcasecmp()

Defined in string.h, the strcasecmp() function performs a case-insensitive string comparison test.

Syntax

extern _ARMABI int strcasecmp(const char *s1, const char *s2);

Related information

Application Binary Interface for the ARM Architecture.

4.33 strncasecmp()

Defined in string.h, the strncasecmp() function performs a case-insensitive string comparison test of not more than a specified number of characters.

Syntax

extern _ARMABI int strncasecmp(const char *s1, const char *s2, size_t n);

Related information

Application Binary Interface for the ARM Architecture.

4.34 strlcat()

Defined in string.h, the strlcat() function concatenates two strings.

Syntax

extern size_t strlcat(char *dst, const char *src, size_t size);

Usage

strlcat() appends up to size-strlen(dst)-1 bytes from the NUL-terminated string src to the end of dst. It takes the full size of the buffer, not only the length, and terminates the result with NUL as long as size is greater than 0. Include a byte for the NUL in your size value.

The strlcat() function returns the total length of the string that would have been created if there was unlimited space. This might or might not be equal to the length of the string actually created, depending on whether there was enough space. This means that you can call strlcat() once to find out how much space is required, then allocate it if you do not have enough, and finally call strlcat() a second time to create the required string.

This function is a common BSD-derived extension to many C libraries.

4.35 strlcpy()

Defined in string.h, the strlcpy() function copies up to *size-1* characters from the NUL-terminated string *src* to *dst*.

Syntax

extern size_t strlcpy(char *dst, const char *src, size_t size);

Usage

strlcpy() takes the full size of the buffer, not only the length, and terminates the result with NUL as long as size is greater than 0. Include a byte for the NUL in your size value.

The strlcpy() function returns the total length of the string that *would* have been copied if there was unlimited space. This might or might not be equal to the length of the string *actually* copied, depending on whether there was enough space. This means that you can call strlcpy() once to find out how much space is required, then allocate it if you do not have enough, and finally call strlcpy() a second time to do the required copy.

This function is a common BSD-derived extension to many C libraries.

4.36 _sys_close()

Defined in rt_sys.h, the _sys_close() function closes a file previously opened with _sys_open().

Syntax

int _sys_close(FILEHANDLE fh);

Usage

This function must be defined if any input/output function is to be used.

Returns


The return value is 0 if successful. A nonzero value indicates an error.

Related references

4.37 sys command string()


Defined in rt_sys.h, the _sys_command_string() function retrieves the command line that invoked the current application from the environment that called the application.

Syntax

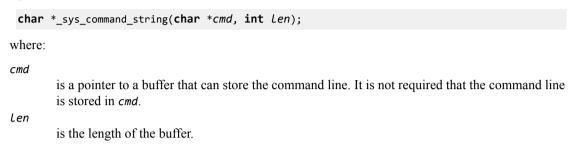

Usage

This function is called by the library startup code to set up argv and argc to pass to main().



You must not assume that the C library is fully initialized when this function is called. For example, you must not call malloc() from within this function. This is because the C library startup sequence calls this function before the heap is fully configured.

Returns

The function must return either:

- A pointer to the command line, if successful. This can be either a pointer to the *cmd* buffer if it is used, or a pointer to wherever else the command line is stored.
- NULL, if not successful.

Related references

4.38 _sys_ensure()

This function is deprecated. It is never called by any other library function, and you are not required to re-implement it if you are retargeting standard I/O (stdio).

4.39 _sys_exit()

Defined in rt_sys.h, this is the library exit function. All exits from the library eventually call _sys_exit().

Syntax

```
void _sys_exit(int return_code);
```

Usage

This function must not return. You can intercept application exit at a higher level by either:

- Implementing the C library function exit() as part of your application. You lose atexit() processing and library shutdown if you do this.
- Implementing the function __rt_exit(int n) as part of your application. You lose library shutdown if you do this, but atexit() processing is still performed when exit() is called or main() returns.

Returns

The return code is advisory. An implementation might attempt to pass it to the execution environment.

Related references

```
1.6.5 Direct semihosting C library function dependencies on page 1-34.
4.5 __default_signal_handler() on page 4-133.
4.18 __raise() on page 4-147.
4.49 _ttywrch() on page 4-179.
4.28 __rt_raise() on page 4-157.
4.23 __rt_exit() on page 4-152.
```

4.40 _sys_flen()

Defined in rt_sys.h, the _sys_flen() function returns the current length of a file.

Syntax

long _sys_flen(FILEHANDLE fh);

Usage

This function is used by _sys_seek() to convert an offset relative to the end of a file into an offset relative to the beginning of the file.

You do not have to define _sys_flen() if you do not intend to use fseek().

If you retarget at system _sys_*() level, you must supply _sys_flen(), even if the underlying system directly supports seeking relative to the end of a file.

Returns

This function returns the current length of the file *fh*, or a negative error indicator.

Related references

4.41 _sys_istty()

Defined in rt_sys.h, the _sys_istty() function determines if a file handle identifies a terminal.

Syntax

```
int _sys_istty(FILEHANDLE fh);
```

Usage

When a file is connected to a terminal device, this function provides unbuffered behavior by default (in the absence of a call to set(v)buf) and prohibits seeking.

Returns

The return value is one of the following values:

0

There is no interactive device.

1

There is an interactive device.

other

An error occurred.

Related references

1.6.5 Direct semihosting C library function dependencies on page 1-34. 4.8 fisatty() on page 4-136.

4.42 _sys_open()

Defined in rt_sys.h, the _sys_open() function opens a file.

Syntax

FILEHANDLE _sys_open(const char *name, int openmode);

Usage

The _sys_open() function is required by fopen() and freopen(). These functions in turn are required if any file input/output function is to be used.

The *openmode* parameter is a bitmap whose bits mostly correspond directly to the ISO mode specification. Target-dependent extensions are possible, but freopen() must also be extended.

Returns

The return value is -1 if an error occurs.

Related references

4.43 _sys_read()

Defined in rt_sys.h, the _sys_read() function reads the contents of a file into a buffer.

Syntax

<pre>int _sys_read(FILEHANDLE fh, unsigned char *buf, unsigned len, int mode);</pre>	
Note	
The mode parameter is here for historical reasons. It contains nothing useful and must be ignored.	

Returns

The return value is one of the following:

- The number of bytes *not* read (that is, *Len* minus the number of bytes that were read).
- An error indication.
- An EOF indicator. The EOF indication involves the setting of 0x80000000 in the normal result.

Reading up to and including the last byte of data does not turn on the EOF indicator. The EOF indicator is only reached when an attempt is made to read beyond the last byte of data. The target-independent code is capable of handling:

- The EOF indicator being returned in the same read as the remaining bytes of data that precede the EOF.
- The EOF indicator being returned on its own after the remaining bytes of data have been returned in a previous read.

Related references

4.44 _sys_seek()

Defined in rt_sys.h, the _sys_seek() function puts the file pointer at offset *pos* from the beginning of the file.

Syntax

int _sys_seek(FILEHANDLE fh, long pos);

Usage

This function sets the current read or write position to the new location pos relative to the start of the current file fh.

Returns

The result is:

- Negative if an error occurs.
- Non-negative if no error occurs.

Related references

4.45 _sys_tmpnam()

Defined in rt_sys.h, the _sys_tmpnam() function converts the file number *fileno* for a temporary file to a unique filename, for example, tmp0001.

Syntax

void _sys_tmpnam(char *name, int fileno, unsigned maxlength);

Usage

The function must be defined if tmpnam() or tmpfile() is used.

Returns


Returns the filename in name.

Related references

4.46 _sys_write()

Defined in rt_sys.h, the _sys_write() function writes the contents of a buffer to a file previously opened with _sys_open().

Syntax



Returns

The return value is either:

- A positive number representing the number of characters *not* written (so any nonzero return value denotes a failure of some sort).
- A negative number indicating an error.

Related references

4.47 system()

This is the standard C library system() function from stdlib.h.

Syntax

int system(const char *string);

Usage

The default implementation of this function uses semihosting.

system() passes the string pointed to by *string* to the host environment to be executed by a command processor in an implementation-defined manner. A null pointer can be used for *string*, to inquire whether a command processor exists.

Returns

If the argument is a NULL pointer, the system function returns nonzero only if a command processor is available.

If the argument is not a NULL pointer, the system() function returns an implementation-defined value.

Related references

4.48 time()

This is the standard C library time() function from time.h.

The default implementation of this function uses semihosting.

Syntax

```
time_t time(time_t *timer);
```

The return value is an approximation of the current calendar time.

Returns

The value -1 is returned if the calendar time is not available. If *timer* is not a NULL pointer, the return value is also stored in timer.

Related references

4.49 _ttywrch()

Defined in rt_sys.h, the _ttywrch() function writes a character to the console.

The console might have been redirected. You can use this function as a last resort error handling routine.

Syntax

```
void _ttywrch(int ch);
```

Usage

The default implementation of this function uses semihosting.

You can redefine this function, or __raise(), even if there is no other input/output. For example, it might write an error message to a log kept in nonvolatile memory.

Related references

```
1.6.5 Direct semihosting C library function dependencies on page 1-34.
4.5 __default_signal_handler() on page 4-133.
4.18 __raise() on page 4-147.
4.39 _sys_exit() on page 4-169.
4.28 __rt_raise() on page 4-157.
```

4.50 user heap extend()

Defined in rt_misc.h, the __user_heap_extend() function can be defined to return extra blocks of memory, separate from the initial one, to be used by the heap.

If defined, this function must return the size and base address of an eight-byte aligned heap extension block.

Syntax

```
extern unsigned user heap extend(int var0, void **base, unsigned requested size);
```

Usage

There is no default implementation of this function. If you define this function, it must have the following characteristics:

- The returned size is one of the following:
 - In AArch32 state, a multiple of eight bytes of at least the requested size.
 - In AArch64 state, a multiple of 16 bytes of at least the requested size.
 - 0, denoting that the request cannot be honored.0, denoting that the request cannot be honored.
- The returned base address is aligned on:
 - In AArch32 state, an eight-byte boundary.
 - In AArch64 state, a 16-byte boundary.
- Size is measured in bytes.
- The function is subject only to ARM Architecture Procedure Call Standard (AAPCS) constraints.
- The first argument is always zero on entry and can be ignored. The base is returned in the register holding this argument.

Returns

This function places a pointer to a block of at least the requested size in *base and returns the size of the block. 0 is returned if no such block can be returned, in which case the value stored at *base is never used.

Related concepts

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

Related references

```
4.25 __rt_heap_extend() on page 4-154.

4.29 __rt_stackheap_init() on page 4-158.

4.51 __user_heap_extent() on page 4-181.

4.52 __user_setup_stackheap() on page 4-182.
```

Related information

Procedure Call Standard for the ARM Architecture.

4.51 __user_heap_extent()

If defined, the __user_heap_extent() function returns the bounds of the memory available to the Heap2 allocator.

See rt_misc.h.

Syntax

```
extern __value_in_regs struct __heap_extent __user_heap_extent(unsigned ignore1,
unsigned ignore2);
```

Usage

The parameters *ignore1* and *ignore2* are the default values for the base address and size of the heap. They are for information only and can be ignored.

You only need to implement this function if you are using the Heap2 allocator, which is also part of the C library. This function has no default implementation. The Heap2 allocator calls it during heap initialization to determine the maximum address range that the heap can occupy. The function returns the base address of the heap and the total number of bytes available to the heap, rounded up to the next power of two.

For example, if you want to specify that all your heap allocations will come from address 0x80000000 and above, and that the heap has a total maximum size of 3MiB, __user_heap_extent() should return base=0x80000000 and range=0x400000, which is 3MiB rounded up to the next power of two.

Related concepts

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

- 1.11.2 Choosing a heap implementation for memory allocation functions on page 1-60.
- 4.25 rt heap extend() on page 4-154.
- 4.29 rt stackheap init() on page 4-158.
- 4.50 user heap extend() on page 4-180.
- 4.52 user setup stackheap() on page 4-182.

4.52 user setup stackheap()

user setup stackheap() sets up and returns the locations of the initial stack and heap.

If you define this function, it is called by the C library during program start-up.

When __user_setup_stackheap() is called, sp has the same value it had on entry to the application. If this was set to a valid value before calling the C library initialization code, it can be left at this value. If sp is not valid, __user_setup_stackheap() must change this value before using any stack and before returning.

__user_setup_stackheap() returns the:

- Heap base, if the program uses the heap.
 - In AArch32 state, register R0 contains the heap base.
 - In AArch64 state, register X0 contains the heap base.
- Stack base in sp.
- Heap limit, if the program uses the heap and uses two-region memory.
 - In AArch32 state, register R2 contains the heap limit.
 - In AArch64 state, register X2 contains the heap limit.

If this function is re-implemented, it must:

- Preserve the registers required by the PCS, except for SP.
- Ensure alignment of the heap:
 - In AArch32 state, maintain 8-byte alignment of the heap by ensuring that the heap base is a multiple of 8.
 - In AArch64 state, maintain 16-byte alignment of the heap by ensuring that the heap base is a multiple of 16.

To create a version of __user_setup_stackheap() that inherits sp from the execution environment and does not have a heap:

- In AArch32 state, set r0 and r2 to zero and return.
- In AArch64 state, set x0 and x2 to zero and return.

There is no limit to the size of the stack. However, if the heap region grows into the stack, malloc() attempts to detect the overlapping memory and fails the new memory allocation request.

Note	_			
Any re-implementation of _	_user_setup_	_stackheap()	must be in	assembler.

Related concepts

Niaka

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

1.11.4 Legacy support for __user_initial_stackheap() on page 1-63.

Related references

1.6.5 Direct semihosting C library function dependencies on page 1-34.

4.25 __rt_heap_extend() on page 4-154.

4.29 rt stackheap init() on page 4-158.

4.50 user heap extend() on page 4-180.

4.51 user heap extent() on page 4-181.

4.53 vectab stack and reset

__vectab_stack_and_reset is a library section that provides a way for the initial values of sp and pc to be placed in the vector table, starting at address 0 for M-profile processors, such as Cortex-M1 and Cortex-M3 embedded applications.

__vectab_stack_and_reset requires the existence of a main() function in your source code. Without a main() function, if you place the __vectab_stack_and_reset section in a scatter file, an error is generated to the following effect:

```
Error: L6236E: No section matches selector - no section to be FIRST/LAST
```

If the normal start-up code is bypassed, that is, if there is intentionally no main() function, you are responsible for setting up the vector table without __vectab_stack_and_reset.

The following segment is part of a scatter file. It includes a minimal vector table illustrating the use of __vectab_stack_and_reset to place the initial sp and pc values at addresses 0x0 and 0x4 in the vector table:

```
;; Maximum of 256 exceptions (256*4 bytes == 0x400)
VECTORS 0x0 0x400
{
    ; First two entries provided by library
    ; Remaining entries provided by the user in exceptions.c
    * (:gdef:__vectab_stack_and_reset, +FIRST)
    * (exceptions_area)
}
CODE 0x400 FIXED
{
    * (+R0)
}
```

Related concepts

1.11.3 Stack pointer initialization and heap bounds on page 1-61.

Related information

About scatter-loading.

4.54 wcscasecmp()

Defined in wchar.h, the wcscasecmp() function performs a case-insensitive string comparison test on wide characters.

This function is a GNU extension to the libraries. It is not POSIX-standardized.

Syntax

int wcscasecmp(const wchar_t * __restrict s1, const wchar_t * __restrict s2);

4.55 wcsncasecmp()

Defined in wchar.h, the wcsncasecmp() function performs a case-insensitive string comparison test of not more than a specified number of wide characters.

This function is a GNU extension to the libraries. It is not POSIX-standardized.

Syntax

int wcsncasecmp(const wchar_t * __restrict s1, const wchar_t * __restrict s2, size_t n);

4.56 wcstombs()

Defined in wchar.h, the wcstombs() function works as described in the ISO C standard, with extended functionality as specified by POSIX.

That is, if s is a NULL pointer, wcstombs() returns the length required to convert the entire array regardless of the value of n, but no values are stored.

Syntax

size_t wcstombs(char *s, const wchar_t *pwcs, size_t n);

4.57 Thread-safe C library functions

The following table shows the C library functions that are thread-safe.

Table 4-1 Functions that are thread-safe

Functions	Description
<pre>calloc(), free(), malloc(),</pre>	The heap functions are thread-safe if the _mutex_* functions are implemented.
realloc()	All threads share a single heap and use mutexes to avoid data corruption when there is concurrent access. Each heap implementation is responsible for doing its own locking. If you supply your own allocator, it must also do its own locking. This enables it to do fine-grained locking if required, rather than protecting the entire heap with a single mutex (coarse-grained locking).
alloca()	alloca() is thread-safe because it allocates memory on the stack.
abort(), raise(), signal(),	The ARM signal handling functions and floating-point exception traps are thread-safe.
fenv.h	The settings for signal handlers and floating-point traps are global across the entire process and are protected by locks. Data corruption does not occur if multiple threads call signal() or an fenv.h function at the same time. However, be aware that the effects of the call act on all threads and not only on the calling thread.
<pre>clearerr(), fclose(),</pre>	The stdio library is thread-safe if the _mutex_* functions are implemented.
<pre>feof(),ferror(), fflush(), fgetc(),fgetpos(), fgets(), fopen(),fputc(), fputs(),</pre>	Each individual stream is protected by a lock, so two threads can each open their own stdio stream and use it, without interfering with one another.
<pre>fropen(),fputc(), fputs(), fread(),freopen(), fseek(), fsetpos(),ftell(), fwrite(), getc(),getchar(), gets(), perror(),putc(), putchar(), puts(),rewind(), setbuf(), setvbuf(),tmpfile(), tmpnam(), ungetc()</pre>	If two threads both want to read or write the same stream, locking at the fgetc() and fputc() level prevents data corruption, but it is possible that the individual characters output by each thread might be interleaved in a confusing way.
	tmpnam() also contains a static buffer but this is only used if the argument is NULL. To ensure that your use of tmpnam() is thread-safe, supply your own buffer space.
<pre>fprintf(), printf(),</pre>	When using these functions:
<pre>vfprintf(), vprintf(), fscanf(), scanf()</pre>	 The standard C printf() and scanf() functions use stdio so they are thread-safe. The standard C printf() function is susceptible to changes in the locale settings if called in a multithreaded program.
clock()	clock() contains static data that is written once at program startup and then only ever read. Therefore, clock() is thread-safe provided no extra threads are already running at the time that the library is initialized.
errno	errno is thread-safe.
	Each thread has its own errno stored in auser_perthread_libspace block. This means that each thread can call errno-setting functions independently and then check errno afterwards without interference from other threads.
atexit()	The list of exit functions maintained by atexit() is process-global and protected by a lock.
	In the worst case, if more than one thread calls atexit(), the order that exit functions are called cannot be guaranteed.

Table 4-1 Functions that are thread-safe (continued)

Functions	Description
<pre>abs(), acos(), asin(),atan(), atan2(), atof(),atol(), atoi(), bsearch(),ceil(), cos(), cosh(),difftime(), div(), exp(),fabs(), floor(), fmod(),frexp(), labs(), ldexp(),ldiv(), log(), log10(),memchr(), memcmp(), memcpy(),memmove(), memset(), mktime(),modf(), pow(), qsort(),sin(), sinh(), sqrt(),strcat(), strchr(), strcmp(),strcpy(), strcspn(), strlcat(),strlcpy(), strlen(), strncat(),strncmp(), strncpy(), strpbrk(),strrchr(), strspn(), strstr(),strxfrm(), tan(), tanh()</pre>	These functions are inherently thread-safe.
<pre>longjmp(), setjmp()</pre>	Although setjmp() and longjmp() keep data inuser_libspace, they call thealloca_* functions, that are thread-safe.
remove(), rename(), time()	These functions use interrupts that communicate with the ARM debugging environments. Typically, you have to reimplement these for a real-world application.
<pre>snprintf(), sprintf(), vsnprintf(),vsprintf(), sscanf(), isalnum(),isalpha(), iscntrl(), isdigit(),isgraph(), islower(), isprint(),ispunct(), isspace(), isupper(),isxdigit(), tolower(), toupper(),strcoll(), strtod(), strtol(),strtoul(), strftime()</pre>	When using these functions, the string-based functions read the locale settings. Typically, they are thread-safe. However, if you change locale in mid-session, you must ensure that these functions are not affected. The string-based functions, such as sprintf() and sscanf(), do not depend on the stdio library.
stdin, stdout, stderr	These functions are thread-safe.

Related concepts

1.5.11 Thread safety in the ARM C library on page 1-30.

Related references

4.2 alloca() on page 4-130.

4.58 C library functions that are not thread-safe

The following table shows the C library functions that are not thread-safe.

Table 4-2 Functions that are not thread-safe

Functions	Description
<pre>asctime(), localtime(), strtok()</pre>	These functions are all thread-unsafe. Each contains a static buffer that might be overwritten by another thread between a call to the function and the subsequent use of its return value. ARM supplies reentrant versions, _asctime_r(), _localtime_r(), and _strtok_r(). ARM recommends that you use these functions instead to ensure safety.
	These reentrant versions take additional parametersasctime_r() takes an additional parameter that is a pointer to a buffer that the output string is written intolocaltime_r() takes an additional parameter that is a pointer to a struct tm, that the result is written intostrtok_r() takes an additional parameter that is a pointer to a char pointer to the next token.
exit()	Do not call exit() in a multithreaded program even if you have provided an implementation of the underlying _sys_exit() that actually terminates all threads.
	In this case, exit() cleans up <i>before</i> calling _sys_exit() so disrupts other threads.
gamma(), lgamma(), lgammaf(), lgammal()°	These extended mathlib functions use a global variable, _signgam, so are not thread-safe.
<pre>mbrlen(), mbsrtowcs(),</pre>	The C90 multibyte conversion functions (defined in stdlib.h) are not thread-safe, for example mblen() and mbtowc(), because they contain internal static state that is shared between all threads without locking.
<pre>mbrtowc(), wcrtomb(), wcsrtombs()</pre>	However, the extended restartable versions (defined in wchar.h) are thread-safe, for example mbrtowc() and wcrtomb(), provided you pass in a pointer to your own mbstate_t object. You must exclusively use these functions with non-NULL mbstate_t * parameters if you want to ensure thread-safety when handling multibyte strings.

If migrating from RVCT, be aware that gamma() is deprecated in ARM Compiler 4.1 and later.

Table 4-2 Functions that are not thread-safe (continued)

Functions Description

rand(),
srand()

These functions keep internal state that is both global and unprotected. This means that calls to rand() are never thread-safe.

ARM recommends that you do one of the following:

- Use the reentrant versions _rand_r() and _srand_r() supplied by ARM. These use user-provided buffers instead of static data within the C library.
- Use your own locking to ensure that only one thread ever calls rand() at a time, for example, by defining \$Sub\$\$rand() if you want to avoid changing your code.
- Arrange that only one thread ever needs to generate random numbers.
- Supply your own random number generator that can have multiple independent instances.

_____ Note _____

_rand_r() and _srand_r() both take an additional parameter that is a pointer to a buffer storing the state of the random number generator.

setlocale(), localeconv()

setlocale() is used for setting and reading locale settings. The locale settings are global across all threads, and are not protected by a lock. If two threads call setlocale() to simultaneously modify the locale settings, or if one thread reads the settings while another thread is modifying them, data corruption might occur. Also, many other functions, for example strtod() and sprintf(), read the current locale settings. Therefore, if one thread calls setlocale() concurrently with another thread calling such a function, there might be unexpected results.

Multiple threads *reading* the settings simultaneously is thread-safe in simple cases and if no other thread is simultaneously modifying those settings, but where internally an intermediate buffer is required for more complicated returned results, unexpected results can occur unless you use a reentrant version of setlocale().

ARM recommends that you either:

- Choose the locale you want and call setlocale() once to initialize it. Do this before creating any
 additional threads in your program so that any number of threads can read the locale settings concurrently
 without interfering with one another.
- Use the reentrant version _setlocale_r() supplied by ARM. This returns a string that is either a pointer
 to a constant string, or a pointer to a string stored in a user-supplied buffer that can be used for thread-local
 storage, rather than using memory within the C library. The buffer must be at least
 SETLOCALE R BUFSIZE bytes long, including space for a trailing NUL.

Be aware that _setlocale_r() is not fully thread-safe when accessed concurrently to *change* locale settings. This access is not lock-protected.

Also, be aware that localeconv() is not thread-safe. Call the ARM function _get_lconv() with a pointer to a user-supplied buffer instead.

Related concepts

1.5.11 Thread safety in the ARM C library on page 1-30.

Related references

4.19 _rand_r() on page 4-148. 4.31 srand r() on page 4-161.

Chapter 5

Floating-point Support Functions Reference

Describes ARM support for floating-point functions.

It contains the following sections:

- 5.1 clearfp() on page 5-192.
- 5.2 controlfp() on page 5-193.
- 5.3 fp status() on page 5-195.
- 5.4 gamma(), gamma r() on page 5-197.
- 5.5 __ieee_status() on page 5-198.
- 5.6j0(), j1(), jn(), Bessel functions of the first kind on page 5-201.
- 5.7 significand(), fractional part of a number on page 5-202.
- 5.8 statusfp() on page 5-203.
- 5.9 y0(), y1(), yn(), Bessel functions of the second kind on page 5-204.

5.1 _clearfp()

Defined in float.h, the _clearfp() function is provided for compatibility with Microsoft products.

_clearfp() clears all five exception sticky flags and returns their previous values. You can use the _controlfp() argument macros, for example _EM_INVALID and _EM_ZERODIVIDE, to test bits of the returned result.

The function prototype for _clearfp() is:


<pre>unsigned _clearfp(void);</pre>
Note
This function requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

Related concepts

3.2.1 Floating-point functions for compatibility with Microsoft products on page 3-104.

- *5.2 _controlfp()* on page 5-193.
- 5.8 _statusfp() on page 5-203.

5.2 _controlfp()

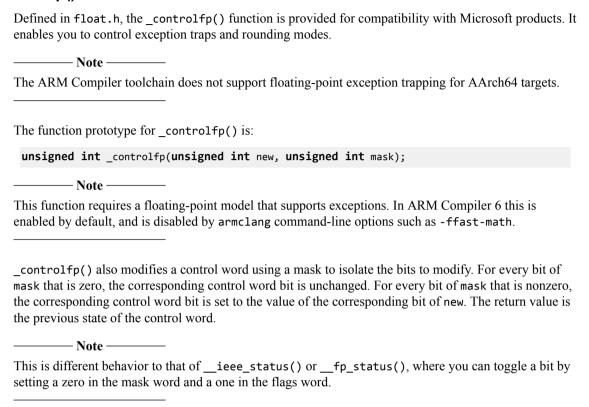

The following table describes the macros you can use to form the arguments to controlfp().

Table 5-1 _controlfp argument macros

Macro	Description
MCW_EM	Mask containing all exception bits
_EM_INVALID	Bit describing the Invalid Operation exception
_EM_ZERODIVIDE	Bit describing the Divide by Zero exception
_EM_OVERFLOW	Bit describing the Overflow exception
_EM_UNDERFLOW	Bit describing the Underflow exception
_EM_INEXACT	Bit describing the Inexact Result exception
MCW_RC	Mask for the rounding mode field
RC_CHOP	Rounding mode value describing Round Toward Zero
RC_UP	Rounding mode value describing Round Up
_RC_DOWN	Rounding mode value describing Round Down
_RC_NEAR	Rounding mode value describing Round To Nearest

Note
The values of these macros are not guaranteed to remain the same in future versions of ARM products.
To ensure that your code continues to work if the value changes in future releases, use the macro rather
than its value.

For example, to set the rounding mode to round down, call:

```
_controlfp(_RC_DOWN, _MCW_RC);
```

To trap the Invalid Operation exception and untrap all other exceptions:

```
_controlfp(_EM_INVALID, _MCW_EM);
```

To untrap the Inexact Result exception:


```
_controlfp(0, _EM_INEXACT);
```

Related concepts

3.2.1 Floating-point functions for compatibility with Microsoft products on page 3-104.

- 5.1 clearfp() on page 5-192.
- 5.8 statusfp() on page 5-203.
- 5.5 ieee status() on page 5-198.
- 5.3 fp status() on page 5-195.

5.3 __fp_status()





The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

__fp_status() is the same as __ieee_status() but it uses an older style of status word layout. The compiler still supports the __fp_status() function for backwards compatibility. __fp_status() is defined in stdlib.h.

The function prototype for fp status() is:



_____Note _____

This function requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

The layout of the status word as seen by __fp_status() is as follows:




Figure 5-1 Floating-point status word layout

The fields in the status word are as follows:

- Bits 0 to 4 (values 0x1 to 0x10, respectively) are the sticky flags, or cumulative flags, for each exception. The sticky flag for an exception is set to 1 whenever that exception happens and is not trapped. Sticky flags are never cleared by the system, only by the user. The mapping of exceptions to bits is:
 - Bit 0 (0x01) is for the Invalid Operation exception
 - Bit 1 (0x02) is for the Divide by Zero exception.
 - Bit 2 (0x04) is for the Overflow exception.
 - Bit 3 (0x08) is for the Underflow exception.
 - Bit 4 (0x10) is for the Inexact Result exception.
- Bits 8 to 12 (values 0x100 to 0x1000) control various aspects of the *Floating-Point Architecture* (FPA). The FPA is obsolete and the ARM compilation tools do not support it. Any attempt to write to these bits is ignored.
- Bits 16 to 20 (values 0x10000 to 0x100000) are the exception masks. These control whether each exception is trapped or not. If a bit is set to 1, the corresponding exception is trapped. If a bit is set to 0, the corresponding exception sets its sticky flag and returns a plausible result.
- Bits 24 to 31 contain the system ID that cannot be changed. It is set to 0x40 for software floating-point, to 0x80 or above for hardware floating-point, and to 0 or 1 if a hardware floating-point environment is being faked by an emulator.
- Bits marked R are reserved. They cannot be written to by the __fp_status() call, and you must ignore anything you find in them.

The rounding mode cannot be changed with the fp status() call.

In addition to defining the __fp_status() call itself, stdlib.h also defines the following constants to be used for the arguments:

```
#define
           __fpsr_IXE
                           0x100000
           __fpsr_UFE
__fpsr_OFE
                           0x80000
0x40000
#define #define
           __fpsr_DZE
                           0x20000
#define
#define
           __fpsr_IOE
__fpsr_IXC
__fpsr_UFC
                           0x10000
#define
                           0x10
#define
                           0x8
#define __fpsr_OFC
                           0x4
#define __fpsr_DZC
#define __fpsr_IOC
                           0x2
                           0x1
```

For example, to trap the Invalid Operation exception and untrap all other exceptions, you would call fp status() with the following input parameters:

To untrap the Inexact Result exception:

```
__fp_status(_fpsr_IXE, 0);
```

To clear the Underflow sticky flag:

```
__fp_status(_fpsr_UFC, 0);
```

Related concepts

3.2 Controlling the ARM floating-point environment on page 3-104.

Related references


5.5 ieee status() on page 5-198.

5.4 gamma(), gamma_r()

The gamma() and gamma_r() functions both compute the logarithm of the gamma function. They are synonyms for lgamma and lgamma_r.

<pre>double gamma(double x); double gamma_r(double x, int *);</pre>
Note
Despite their names, these functions compute the logarithm of the gamma function, not the gamma function itself. To compute the gamma function itself, use tgamma().
Note
These functions are deprecated.

5.5 ieee status()



_____Note ____

The ARM Compiler toolchain does not support floating-point exception trapping for AArch64 targets.

__ieee_status() is defined in fenv.h.

The function prototype for __ieee_status() is:

unsigned int __ieee_status(unsigned int mask, unsigned int flags);

_____ Note _____

This function requires a floating-point model that supports exceptions. In ARM Compiler 6 this is enabled by default, and is disabled by armclang command-line options such as -ffast-math.

__ieee_status() modifies the writable parts of the status word according to the parameters, and returns the previous value of the whole word.

The writable bits are modified by setting them to:

```
new = (old & ~mask) ^ flags;
```

Four different operations can be performed on each bit of the status word, depending on the corresponding bits in mask and flags.

Table 5-2 Status word bit modification

Bit of mask	Bit of flags	Effect
0	0	Leave alone
0	1	Toggle
1	0	Set to 0
1	1	Set to 1

The layout of the status word as seen by __ieee_status() is as follows:



Figure 5-2 IEEE status word layout

The fields in the status word are as follows:

- Bits 0 to 4 (values 0x1 to 0x10, respectively) are the sticky flags, or cumulative flags, for each exception. The sticky flag for an exception is set to 1 whenever that exception happens and is not trapped. Sticky flags are never cleared by the system, only by the user. The mapping of exceptions to bits is:
 - Bit 0 (0x01) is for the Invalid Operation exception
 - Bit 1 (0x02) is for the Divide by Zero exception.
 - Bit 2 (0x04) is for the Overflow exception.

- Bit 3 (0x08) is for the Underflow exception.
- Bit 4 (0x10) is for the Inexact Result exception.
- Bits 8 to 12 (values 0x100 to 0x1000) are the exception masks. These control whether each exception is trapped or not. If a bit is set to 1, the corresponding exception is trapped. If a bit is set to 0, the corresponding exception sets its sticky flag and returns a plausible result.
- Bits 16 to 18, and bits 20 and 21, are used by VFP hardware to control the VFP vector capability. The ieee status() call does not let you modify these bits.
- Bits 22 and 23 control the rounding mode. See the following table.

Table 5-3 Rounding mode control

Bits	Rounding mode
00	Round to nearest
01	Round up
10	Round down
11	Round toward zero

_____ Note ____

The relevant libraries are selected by default in ARM Compiler 6. The armclang command-line option -ffast-math selects the other variants.

• Bit 24 enables FZ (Flush to Zero) mode if it is set. In FZ mode, denormals are forced to zero to speed up processing because denormals can be difficult to work with and slow down floating-point systems. Setting this bit reduces accuracy but might increase speed.



- The FZ bit in the IEEE status word is not supported by any of the fplib variants. This means that switching between flushing to zero and not flushing to zero is not possible with any variant of fplib at *runtime*. However, flushing to zero or not flushing to zero can be set at compile time as a result of the library you choose to build with.
- Some functions are not provided in hardware. They exist only in the software floating-point libraries. So these functions cannot support the FZ mode, even when you are compiling for a hardware VFP architecture. As a result, behavior of the floating-point libraries is not consistent across all functions when you change the FZ mode dynamically.
- Bit 27 indicates that saturation has occurred in an advanced SIMD saturating integer operation. This is accessible through the __ieee_status() call.
- Bits marked R are reserved. They cannot be written to by the __ieee_status() call, and you must ignore anything you find in them.

In addition to defining the __ieee_status() call itself, fenv.h also defines the following constants to be used for the arguments:

```
#define FE_IEEE_FLUSHZERO
                                    (0x01000000)
#define FE_IEEE_ROUND_TONEAREST
                                     (0x00000000)
#define FE IEEE ROUND UPWARD
                                     0x00400000
#define FE_IEEE_ROUND_DOWNWARD
                                     0x00800000
#define FE_IEEE_ROUND_TOWARDZERO
                                     0x00C00000
#define FE_IEEE_ROUND_MASK
                                     0x00C00000
#define FE_IEEE_MASK_INVALID
                                     0x00000100
#define FE_IEEE_MASK_DIVBYZERO
                                     0x00000200)
#define FE_IEEE_MASK_OVERFLOW
                                     0x00000400
#define FE_IEEE_MASK_UNDERFLOW
                                     0x00000800)
#define FE_IEEE_MASK_INEXACT
                                     0x00001000
#define FE IEEE MASK ALL EXCEPT
                                     0x00001F00)
#define FE_IEEE_INVALID
                                     0x00000001
#define FE_IEEE_DIVBYZERO
                                     0x000000002
#define FE IEEE OVERFLOW
                                     0x00000004
#define FE_IEEE_UNDERFLOW
                                    (0x00000008)
```

```
#define FE_IEEE_INEXACT (0x00000010)
#define FE_IEEE_ALL_EXCEPT (0x0000001F)

For example, to set the rounding mode to round down, you would call:

__ieee_status(FE_IEEE_ROUND_MASK, FE_IEEE_ROUND_DOWNWARD);

To trap the Invalid Operation exception and untrap all other exceptions:

__ieee_status(FE_IEEE_MASK_ALL_EXCEPT, FE_IEEE_MASK_INVALID);

To untrap the Inexact Result exception:

__ieee_status(FE_IEEE_MASK_INEXACT, 0);

To clear the Underflow sticky flag:

__ieee_status(FE_IEEE_UNDERFLOW, 0);
```

Related concepts

- 3.2 Controlling the ARM floating-point environment on page 3-104.
- 3.5.7 Exceptions arising from IEEE 754 floating-point arithmetic on page 3-122.

- 3.2.8 ARM floating-point compiler extensions to the C99 interface on page 3-108.
- 5.3 fp status() on page 5-195.
- 1.25 C and C++ library naming conventions on page 1-87.

5.6 j0(), j1(), jn(), Bessel functions of the first kind

These functions compute Bessel functions of the first kind.

j0 and j1 compute the functions of order 0 and 1 respectively. jn computes the function of order n.

double	j0(double	x);
double	j1(double	x);
double	jn(int n,	<pre>double x);</pre>

If the absolute value of x exceeds pi times 2^52 , these functions return an ERANGE error, denoting total loss of significance in the result.

Note			
These functions are deprecate	•		

5.7 significand(), fractional part of a number

The significand() function returns the fraction part of x, as a number between 1.0 and 2.0 (not including 2.0).

<pre>double significand(double x);</pre>		
Note —		
This function is deprecated.		

5.8 _statusfp()

Defined in float.h, the _statusfp() function is provided for compatibility with Microsoft products. It returns the current value of the exception sticky flags.

You can use the _controlfp() argument macros, for example _EM_INVALID and _EM_ZERODIVIDE, to test bits of the returned result.

The function prototype for _statusfp() is:

The function prototype for _scacus+p() 13.	
<pre>unsigned _statusfp(void);</pre>	
Note ——— This function requires a floating-point model that supports exceptions. In ARM Compiler 6 this	is
enabled by default, and is disabled by armclang command-line options such as -ffast-math.	

Related concepts

3.2.1 Floating-point functions for compatibility with Microsoft products on page 3-104.

- 5.1 _clearfp() on page 5-192.
- 5.2 _controlfp() on page 5-193.

5.9 y0(), y1(), yn(), Bessel functions of the second kind

These functions compute Bessel functions of the second kind.

y0 and y1 compute the functions of order 0 and 1 respectively. yn computes the function of order n.

<pre>double y0(double x);</pre>		
<pre>double y1(double x);</pre>		
<pre>double yn(int, double);</pre>		

If x is positive and exceeds pi times 2^52 , these functions return an ERANGE error, denoting total loss of significance in the result.

- 0						
		_ N	ote –			
		1	ote			
These	e fui	nctio	ns are	e dep	recate	e